


► Linear Epipolar Rectification for Easier Correspondence Search

Problem: Given fundamental matrix \mathbf{F} or camera matrices $\mathbf{P}_1, \mathbf{P}_2$, transform images by a pair of homographies so that epipolar lines become horizontal with the same row coordinate. The result is a standard stereo pair.

Procedure:

1. find a pair of rectification homographies \mathbf{H}_1 and \mathbf{H}_2 .
2. warp images using \mathbf{H}_1 and \mathbf{H}_2 and modify the fundamental matrix $\mathbf{F} \mapsto \mathbf{H}_2^{-T} \mathbf{F} \mathbf{H}_1^{-1}$ or the cameras $\mathbf{P}_1 \mapsto \mathbf{H}_1 \mathbf{P}_1, \mathbf{P}_2 \mapsto \mathbf{H}_2 \mathbf{P}_2$.

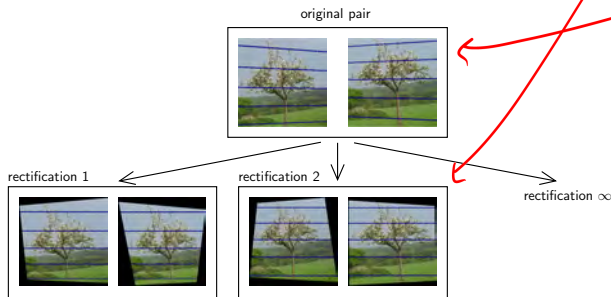


- binocular rectification: there is a 9-parameter family of rectification homographies, see next
- trinocular rectification: has 9 or 6 free parameters (depending on additional constrains)
- in general, linear rectification is not possible for more than three cameras

► Rectification Homographies

Assumption: Cameras $(\mathbf{P}_1, \mathbf{P}_2)$ are rectified by a homography pair $(\mathbf{H}_1, \mathbf{H}_2)$:

$$\mathbf{P}_i^* = \mathbf{H}_i \mathbf{P}_i = \mathbf{H}_i \mathbf{K}_i \mathbf{R}_i [\mathbf{I} \quad -\mathbf{C}_i], \quad i = 1, 2$$



rectified entities: \mathbf{F}^* , l_2^* , l_1^* , etc:

- the rectified location difference $d = u_1^* - u_2^*$ is called disparity

corresponding epipolar lines must be:

1. parallel to image rows \Rightarrow epipoles become $e_1^* = e_2^* = (1, 0, 0)$
2. equivalent $l_2^* = l_1^* \Rightarrow$ (a) $l_2^* \simeq l_1^* \simeq \mathbf{e}_1^* \times \mathbf{m}_1 = [\mathbf{e}_1^*]_{\times} \mathbf{m}_1$, (b) $l_2^* \simeq \mathbf{F}^* \mathbf{m}_1$

- therefore the canonical fundamental matrix is

$$\mathbf{F}^* \simeq \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & -1 \\ 0 & 1 & 0 \end{bmatrix}$$

A two-step rectification procedure

1. find some pair of primitive rectification homographies $\hat{\mathbf{H}}_1, \hat{\mathbf{H}}_2$
2. upgrade to a pair of optimal rectification homographies while preserving \mathbf{F}^*

► Geometric Interpretation of Linear Rectification

What pair of physical cameras is compatible with \mathbf{F}^* ?

$$P = KR[I | c]$$

- we know that $\mathbf{F} = (\mathbf{Q}_1 \mathbf{Q}_2^{-1})^\top [\mathbf{e}_1]_\times$
- we choose $\mathbf{Q}_1^* = \mathbf{K}_1^*$, $\mathbf{Q}_2^* = \mathbf{K}_2^* \mathbf{R}^*$; then

→79

$$(\mathbf{Q}_1^* \mathbf{Q}_2^{*-1})^\top [\mathbf{e}_1^*]_\times = (\mathbf{K}_1^* \mathbf{R}^{*\top} \mathbf{K}_2^{*-1})^\top \mathbf{F}^*$$

- we look for \mathbf{R}^* , \mathbf{K}_1^* , \mathbf{K}_2^* compatible with

$$(\mathbf{K}_1^* \mathbf{R}^{*\top} \mathbf{K}_2^{*-1})^\top \mathbf{F}^* = \lambda \mathbf{F}^*, \quad \mathbf{R}^* \mathbf{R}^{*\top} = \mathbf{I}, \quad \mathbf{K}_1^*, \mathbf{K}_2^* \text{ upper triangular}$$

- we also want \mathbf{b}^* from $\mathbf{e}_1^* \simeq \mathbf{P}_1^* \mathbf{C}_2^* = \mathbf{K}_1^* \mathbf{b}^*$ \mathbf{b}^* in cam. 1 frame
- result:

$$\mathbf{R}^* = \mathbf{I}, \quad \mathbf{b}^* = \begin{bmatrix} b \\ 0 \\ 0 \end{bmatrix}, \quad \mathbf{K}_1^* = \begin{bmatrix} k_{11} & k_{12} & k_{13} \\ 0 & f & v_0 \\ 0 & 0 & 1 \end{bmatrix}, \quad \mathbf{K}_2^* = \begin{bmatrix} k_{21} & k_{22} & k_{23} \\ 0 & f & v_0 \\ 0 & 0 & 1 \end{bmatrix} \quad (34)$$





- rectified cameras are in canonical position with respect to each other
not rotated, canonical baseline
- rectified calibration matrices can differ in the first row only
- when $\mathbf{K}_1^* = \mathbf{K}_2^*$ then the rectified pair is called the standard stereo pair and the homographies standard rectification homographies
- this does not mean that the images are not distorted after rectification

► The Degrees of Freedom in Epipolar Rectification

Proposition 1 Homographies \mathbf{A}_1 and \mathbf{A}_2 are rectification-preserving if the images stay rectified, i.e. if $\mathbf{A}_2^{-\top} \mathbf{F}^* \mathbf{A}_1^{-1} \simeq \mathbf{F}^*$, which gives

$$\mathbf{A}_1 = \begin{bmatrix} l_1 & l_2 & l_3 \\ 0 & s_v & t_v \\ 0 & q & 1 \end{bmatrix}, \quad \mathbf{A}_2 = \begin{bmatrix} r_1 & r_2 & r_3 \\ 0 & s_v & t_v \\ 0 & q & 1 \end{bmatrix}, \quad \begin{array}{c} u \\ \downarrow \\ \square \end{array}$$

where $s_v \neq 0$, t_v , $l_1 \neq 0$, l_2 , l_3 , $r_1 \neq 0$, r_2 , r_3 , q are 9 free parameters.

general	transformation		standard	type
l_1, r_1	horizontal scales		$l_1 = r_1$	geometric
l_2, r_2	horizontal shears		$l_2 = r_2$	algebraic
l_3, r_3	horizontal shifts		$l_3 = r_3$	algebraic
q	common special projective			geometric
s_v	common vertical scale			geometric
t_v	common vertical shift			algebraic
9 DoF			$9 - 3 = 6$ DoF	

- q is rotation about the baseline
- s_v changes the focal length

proof: find a rotation \mathbf{G} that brings \mathbf{K} to upper triangular form via RQ decomposition: $\mathbf{A}_1 \mathbf{K}_1^* = \hat{\mathbf{K}}_1 \mathbf{G}$ and $\mathbf{A}_2 \mathbf{K}_2^* = \hat{\mathbf{K}}_2 \mathbf{G}$

Corollary for Proposition 1 Let $\bar{\mathbf{H}}_1$ and $\bar{\mathbf{H}}_2$ be (primitive or other) rectification homographies. Then $\mathbf{H}_1 = \mathbf{A}_1 \bar{\mathbf{H}}_1$, $\mathbf{H}_2 = \mathbf{A}_2 \bar{\mathbf{H}}_2$ are also rectification homographies.

Proposition 2 Pairs of rectification-preserving homographies $(\mathbf{A}_1, \mathbf{A}_2)$ form a group with group operation $(\mathbf{A}'_1, \mathbf{A}'_2) \circ (\mathbf{A}_1, \mathbf{A}_2) = (\mathbf{A}'_1 \mathbf{A}_1, \mathbf{A}'_2 \mathbf{A}_2)$.

Proof:

- closure by Proposition 1
- associativity by matrix multiplication
- identity belongs to the set
- inverse element belongs to the set by $\mathbf{A}_2^\top \mathbf{F}^* \mathbf{A}_1 \simeq \mathbf{F}^* \Leftrightarrow \mathbf{F}^* \simeq \mathbf{A}_2^{-\top} \mathbf{F}^* \mathbf{A}_1^{-1}$

► Primitive Rectification

Goal: Given fundamental matrix \mathbf{F} , derive some simple rectification homographies $\mathbf{H}_1, \mathbf{H}_2$

1. Let the SVD of \mathbf{F} be $\mathbf{UDV}^\top = \mathbf{F}$, where $\mathbf{D} = \text{diag}(1, d^2, 0)$, $1 \geq d^2 > 0$
2. Write \mathbf{D} as $\mathbf{D} = \mathbf{A}^\top \mathbf{F}^* \mathbf{B}$ for some regular \mathbf{A}, \mathbf{B} . For instance (\mathbf{F}^* is given $\rightarrow 153$)

$$\mathbf{A} = \begin{bmatrix} 0 & 0 & 1 \\ 0 & -d & 0 \\ 1 & 0 & 0 \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} 0 & 0 & 1 \\ 1 & 0 & 0 \\ 0 & d & 0 \end{bmatrix}$$

3. Then

$$\mathbf{F} = \mathbf{UDV}^\top = \underbrace{\mathbf{UA}^\top}_{\hat{\mathbf{H}}_2^\top} \mathbf{F}^* \underbrace{\mathbf{BV}^\top}_{\hat{\mathbf{H}}_1}$$

and the primitive rectification homographies are

$$\hat{\mathbf{H}}_2 = \mathbf{AU}^\top, \quad \hat{\mathbf{H}}_1 = \mathbf{BV}^\top$$

⊛ P1; 1pt: derive some other admissible \mathbf{A}, \mathbf{B}

- rectification homographies do exist $\rightarrow 153$
- there are other primitive rectification homographies, these suggested are just simple to obtain

► Primitive Rectification Suffices for Calibrated Cameras

Obs: calibrated cameras: $d = 1 \Rightarrow \hat{\mathbf{H}}_1, \hat{\mathbf{H}}_2$ are orthogonal

1. determine primitive rectification homographies $(\hat{\mathbf{H}}_1, \hat{\mathbf{H}}_2)$ from the essential matrix
2. choose a suitable common calibration matrix \mathbf{K} , e.g.

$$\mathbf{K} = \begin{bmatrix} f & 0 & u_0 \\ 0 & f & v_0 \\ 0 & 0 & 1 \end{bmatrix}, \quad f = \frac{1}{2}(f^1 + f^2), \quad u_0 = \frac{1}{2}(u_0^1 + u_0^2), \quad \text{etc.}$$

3. the final rectification homographies applied as $\mathbf{P}_i \mapsto \mathbf{H}_i \mathbf{P}_i$ are

$$\mathbf{H}_1 = \mathbf{K} \hat{\mathbf{H}}_1 \mathbf{K}_1^{-1}, \quad \mathbf{H}_2 = \mathbf{K} \hat{\mathbf{H}}_2 \mathbf{K}_2^{-1}$$

- we got a standard stereo pair ($\rightarrow 154$) and non-negative disparity

$$\text{let } \mathbf{K}_i^{-1} \mathbf{P}_i = \mathbf{R}_i [\mathbf{I} \quad -\mathbf{C}_i], \quad i = 1, 2 \quad \text{note we started from } \mathbf{E}, \text{ not } \mathbf{F}$$

$$\mathbf{H}_1 \mathbf{P}_1 = \mathbf{K} \hat{\mathbf{H}}_1 \mathbf{K}_1^{-1} \mathbf{P}_1 = \mathbf{K} \underbrace{\mathbf{B} \mathbf{V}^\top \mathbf{R}_1}_{\mathbf{R}^*} [\mathbf{I} \quad -\mathbf{C}_1] = \mathbf{K} \mathbf{R}^* [\mathbf{I} \quad -\mathbf{C}_1] \quad \text{standard pair}$$

$$\mathbf{H}_2 \mathbf{P}_2 = \mathbf{K} \hat{\mathbf{H}}_2 \mathbf{K}_2^{-1} \mathbf{P}_2 = \mathbf{K} \underbrace{\mathbf{A} \mathbf{U}^\top \mathbf{R}_2}_{\mathbf{R}^*} [\mathbf{I} \quad -\mathbf{C}_2] = \mathbf{K} \mathbf{R}^* [\mathbf{I} \quad -\mathbf{C}_2]$$


- one can prove that $\mathbf{B} \mathbf{V}^\top \mathbf{R}_1 = \mathbf{A} \mathbf{U}^\top \mathbf{R}_2$ with the help of essential matrix decomposition (14)
- points at infinity project to $\mathbf{K} \mathbf{R}^*$ in both images \Rightarrow they have zero disparity

$\rightarrow 161$

► Summary

- rectification is a pair of homographies (one per image) →152
⇒ rectified camera centers are equal to the original ones
- rectified cameras are in canonical orientation →154
⇒ rectified image projection planes are coplanar
- equal rectified calibration matrices give standard rectification →154
⇒ rectified image projection planes are equal
- primitive rectification is standard in calibrated cameras →158

standard rectification homographies reproject onto a common image plane parallel to the baseline



Corollary

- standard rectified pair: disparity vanishes when corresponding 3D points are at infinity
 - known \mathbf{F} used alone gives no constraints on standard rectification homographies
 - for that we need either of these:
 1. projection matrices, or
 2. calibrated cameras, or
 3. a few points at infinity calibrating $k_{1i}, k_{2i}, i = 1, 2, 3$ in (34)

Optimal and Non-linear Rectification

Optimal choice for the free parameters

- by minimization of residual image distortion, eg. [Gluckman & Nayar 2001]

$$\mathbf{A}_1^* = \arg \min_{\mathbf{A}_1} \iint_{\Omega} (\det J(\mathbf{A}_1 \hat{\mathbf{H}}_1 \mathbf{x}) - 1)^2 d\mathbf{x}$$

- by minimization of image information loss [Matoušek, ICIG 2004]
- non-linear rectification suitable for forward motion non-parametric: [Pollefeys et al. 1999] analytic: [Geyer & Daniilidis 2003]

$$\begin{pmatrix} \cdot \\ \cdot \\ \cdot \end{pmatrix} \in \mathbb{H}e_1$$




forward egomotion



rectified images, Pollefeys' method

► Binocular Disparity in Standard Stereo Pair

top view

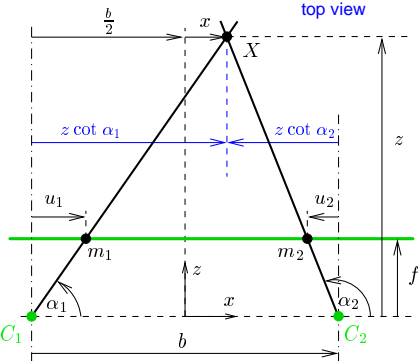

- Assumptions: single image line, standard camera pair

$$b = z \cot \alpha_1 - z \cot \alpha_2$$

$$u_1 = f \cot \alpha_1$$

$$u_2 = f \cot \alpha_2$$

$$b = \frac{b}{2} + x - z \cot \alpha_2$$

$X = (x, z)$ from **disparity** $d = u_1 - u_2$:

$$\triangleright z = \frac{b f}{d}, \quad x = \frac{b}{d} \frac{u_1 + u_2}{2}, \quad y = \frac{b v}{d}$$

f, d, u, v in pixels, b, x, y, z in meters


Observations

- constant disparity surface is a frontoparallel plane
- distant points have small disparity
- relative error in z is large for small disparity

$$\frac{1}{z} \frac{dz}{dd} = -\frac{1}{d}$$

- increasing the baseline or the focal length increases disparity and reduces the error

side view

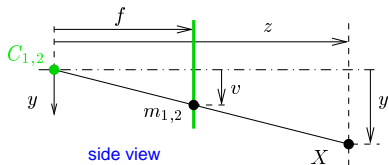

Structural Ambiguity in Stereovision


- we can recognize matches but have no scene model
 - lack of an occlusion model
 - lack of a continuity model
- ⇒ structural ambiguity in the presence of repetitions (or lack of texture)




left image



right image




interpretation 1



interpretation 2


► Understanding Basic Occlusion Types

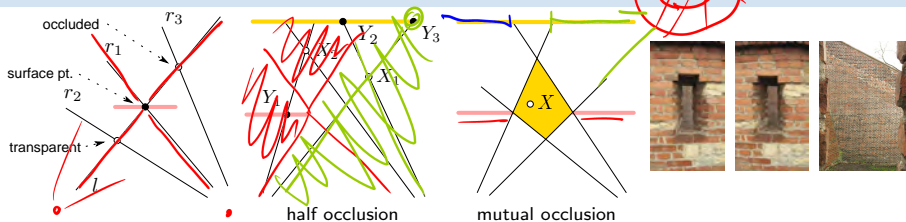

- surface point at the intersection of rays l and r_1 occludes a world point at the intersection (l, r_3) and implies the world point (l, r_2) is transparent, therefore

(l, r_3) and (l, r_2) are excluded by (l, r_1)

- in half-occlusion, every world point such as X_1 or X_2 is excluded by a binocularly visible surface point such as Y_1, Y_2, Y_3
 \Rightarrow decisions on correspondences are not independent
- in mutual occlusion this is no longer the case: any X in the yellow zone is not excluded
 \Rightarrow decisions in the zone are independent on the rest



Thank You



