

Robotic Information Gathering - Exploration of Unknown Environment

Jan Faigl

Department of Computer Science
Faculty of Electrical Engineering
Czech Technical University in Prague

Lecture 05

B4M36UIR – Artificial Intelligence in Robotics

Overview of the Lecture



- Part 1 – Robotic Information Gathering - Robotic Exploration
 - Robotic Information Gathering
 - Robotic Exploration
 - TSP-based Robotic Exploration
 - Robotic Information Gathering

Part I

Part 1 – Robotic Exploration

Robotic Information Gathering

Create a model of phenomena by autonomous mobile robots performing measurements in a dynamic unknown environment.

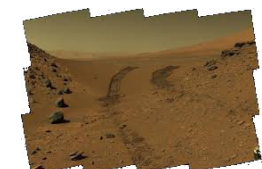

Challenges in Robotic Information Gathering

- **Where to take new measurements?**

To improve the phenomena model

- **What locations visit first?**


On-line decision-making

- **How to efficiently utilize more robots?**

To divide the task between the robots

- **How to navigate robots to the selected locations?**

Improve Localization vs Model

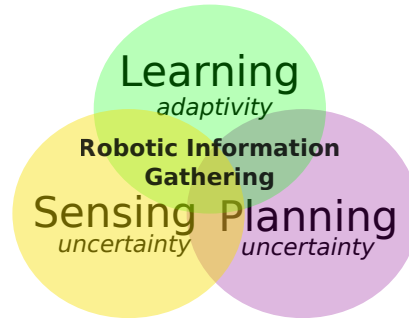

How to address all these aspects altogether to find a cost efficient solution using in-situ decisions?

Mobile Robot Exploration

- Create a map of the environment

- **Frontier**-based approach

Yamauchi (1997)


- Occupancy grid map

Moravec and Elfes (1985)

- Laser scanner sensor

- Next-best-view approach

Select the next robot goal

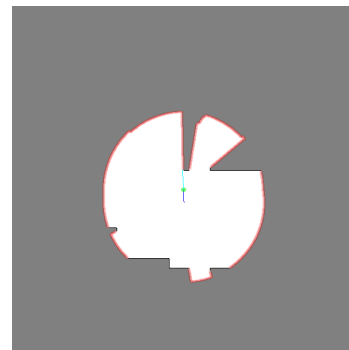

Performance metric:

Time to create the map of the whole environment

search and rescue mission

Robotic Exploration of Unknown Environment

- Robotic exploration is a fundamental problem of robotic information gathering

- The problem is:

- **How to efficiently utilize a group of mobile robots to autonomously create a map of an unknown environment**

- Performance indicators vs constraints

Time, energy, map quality vs robots, communication

- Performance in a real mission depends on the on-line **decision-making**

- It includes the problems of:


- Map building and localization

- Determination of the navigational waypoints

Where to go next?

- Path planning and navigation to the waypoints

- Coordination of the actions (multi-robot team)

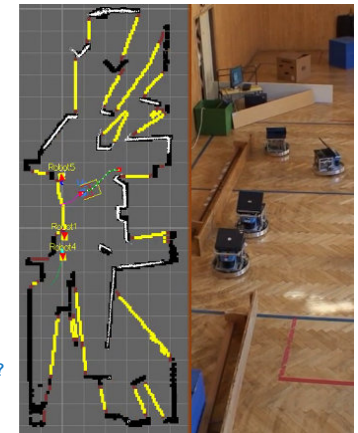

Courtesy of M. Kulich

Environment Representation – Mapping and Occupancy Grid

- The robot uses its sensors to build a map of the environment

- The robot should be localized to integrate new sensor measurements into a globally consistent map

- **SLAM** – Simultaneous Localization and Mapping

- The robot uses the map being built to localize itself

- The map is primarily to help to localize the robot

- The map is a “side product” of SLAM



- **Grid map** – discretized world representation

- A cell is **occupied** (an obstacle) or **free**

- **Occupancy grid map**


- Each cell is a binary random variable modeling the occupancy of the cell



Occupancy Grid


Assumptions

- The area of a cell is either completely free or occupied
- Cells (random variables) are independent of each other
- The state is **static**



- A cell is a binary random variable modeling the occupancy of the cell

- Cell m_i is occupied $p(m_i) = 1$
- Cell m_i is not occupied $p(m_i) = 0$
- Unknown** $p(m_i) = 0.5$



- Probability distribution of the map m

$$p(m) = \prod_i p(m_i)$$

- Estimation of map from sensor data $z_{1:t}$ and robot poses $x_{1:t}$

$$p(m|z_{1:t}, x_{1:t}) = \prod_i p(m_i|z_{1:t}, x_{1:t})$$

Binary Bayes filter – Bayes rule and Markov process assumption

Binary Bayes Filter 2/2

- Probability a cell is occupied

$$p(m_i|z_{1:t}, x_{1:t}) = \frac{p(m_i|z_t, x_t)p(z_t|x_t)p(m_i|z_{1:t-1}, x_{1:t-1})}{p(m_i)p(z_t|z_{1:t-1}, x_{1:t})}$$

- Probability a cell is not occupied

$$p(\neg m_i|z_{1:t}, x_{1:t}) = \frac{p(\neg m_i|z_t, x_t)p(z_t|x_t)p(\neg m_i|z_{1:t-1}, x_{1:t-1})}{p(\neg m_i)p(z_t|z_{1:t-1}, x_{1:t})}$$

- Ratio of the probabilities

$$\begin{aligned} \frac{p(m_i|z_{1:t}, x_{1:t})}{p(\neg m_i|z_{1:t}, x_{1:t})} &= \frac{p(m_i|z_t, x_t)p(m_i|z_{1:t-1}, x_{1:t-1})p(\neg m_i)}{p(\neg m_i|z_t, x_t)p(\neg m_i|z_{1:t-1}, x_{1:t-1})p(m_i)} \\ &= \frac{p(m_i|z_t, x_t)}{1 - p(m_i|z_t, x_t)} \frac{p(m_i, z_{1:t-1}, x_{1:t-1})}{1 - p(m_i|z_{1:t-1}, x_{1:t-1})} \frac{1 - p(m_i)}{p(m_i)} \end{aligned}$$

sensor model z_t , recursive term, prior

Binary Bayes Filter 1/2

- Sensor data $z_{1:t}$ and robot poses $x_{1:t}$

- Binary random variables are independent and states are static

$$p(m_i|z_{1:t}, x_{1:t}) \stackrel{\text{Bayes rule}}{=} \frac{p(z_t|m_i, z_{1:t-1}, x_{1:t})p(m_i|z_{1:t-1}, x_{1:t})}{p(z_t|z_{1:t-1}, x_{1:t})}$$

$$\stackrel{\text{Markov}}{=} \frac{p(z_t|m_i, x_t)p(m_i|z_{1:t-1}, x_{1:t-1})}{p(z_t|z_{1:t-1}, x_{1:t})}$$

$$p(z_t|m_i, x_t) = \frac{p(m_i, z_t, x_t)p(z_t, x_t)}{p(m_i|x_t)}$$

$$p(m_i, z_{1:t}, x_{1:t}) \stackrel{\text{Bayes rule}}{=} \frac{p(m_i|z_t, x_t)p(z_t|x_t)p(m_i|z_{1:t-1}, x_{1:t-1})}{p(m_i|x_t)p(z_t|z_{1:t-1}, x_{1:t})}$$

$$\stackrel{\text{Markov}}{=} \frac{p(m_i|z_t, x_t)p(z_t|x_t)p(m_i|z_{1:t-1}, x_{1:t-1})}{p(m_i)p(z_t|z_{1:t-1}, x_{1:t})}$$

Logs Odds Notation

- Log odds ratio is defined as

$$l(x) = \log \frac{p(x)}{1 - p(x)}$$

- and the probability $p(x)$ is

$$p(x) = 1 - \frac{1}{1 - e^{l(x)}}$$

- The product modeling the cell m_i based on $z_{1:t}$ and $x_{1:t}$

$$l(m_i|z_{1:t}, x_{1:t}) = \underbrace{l(m_i|z_t, x_t)}_{\text{inverse sensor model}} + \underbrace{l(m_i, |z_{1:t-1}, x_{1:t-1})}_{\text{recursive term}} - \underbrace{l(m_i)}_{\text{prior}}$$


Occupancy Mapping Algorithm

Algorithm 1: OccupancyGridMapping($\{l_{t-1,i}\}, x_t, z_t$)

```


foreach  $m_i$  of the map  $m$  do
  if  $m_i$  in the perceptual field of  $z_t$  then
     $l_{t,i} := l_{t-1,i} + \text{inv\_sensor\_model}(m_i, x_t, z_t) - l_0$ ;
  else
     $l_{t,i} := l_{t-1,i}$ ;
return  $\{l_{t,i}\}$ 
    
```

- Occupancy grid mapping developed by Moravec and Elfes in mid 80'ies for noisy sonars

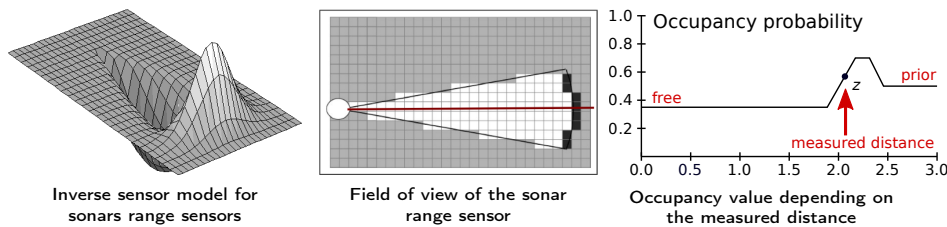

Frontier-based Exploration


- The basic idea of the **frontier** based exploration is navigation of the mobile robot towards unknown regions *Yamauchi (1997)*
- Frontier** – a border of the known and unknown regions of the environment
- Based on the probability of individual cells in the occupancy grid, cells are classified into:
 - FREESPACE** – $p(m_i) < 0.5$
 - OBSTACLE** – $p(m_i) > 0.5$
 - UNKNOWN** – $p(m_i) = 0.5$
- Frontier cell** is a FREESPACE cell that is incident with an UNKNOWN cell
- Frontier cells as the navigation way-points have to be reachable, e.g., after obstacle growing

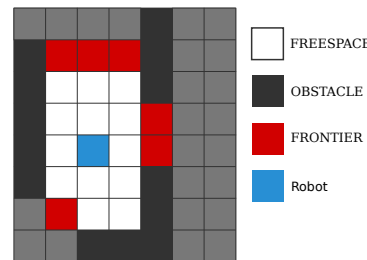

Use grid-based path planning

Model for Laser Sensor


- The model is “sharp” with a precise detection of the obstacle
- For the range measurement d_i , update the grid cells along a sensor beam

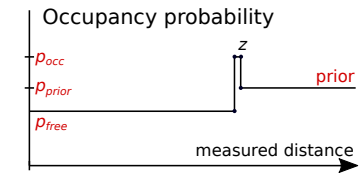

Algorithm 2: Update map for $\mathcal{L} = (d_1, \dots, d_n)$

```

foreach  $d_i \in \mathcal{L}$  do
  foreach cell  $m_i$  raycasted towards  $\min(d_i, \text{range})$  do
     $p := \text{grid}(m_i)p_{free}$ ;
     $\text{grid}(m_i) := p/(2p - p_{free} - \text{grid}(m_i) + 1)$ ;
   $m_d := \text{cell at } d_i$ ;
  if obstacle detected at  $m_d$  then
     $p := \text{grid}(m_d)p_{occ}$ ;
     $\text{grid}(m_i) := p/(2p - p_{occ} - \text{grid}(m_i) + 1)$ 
  else
     $p := \text{grid}(m_d)p_{free}$ ;
     $\text{grid}(m_i) := p/(2p - p_{free} - \text{grid}(m_i) + 1)$ 
    
```

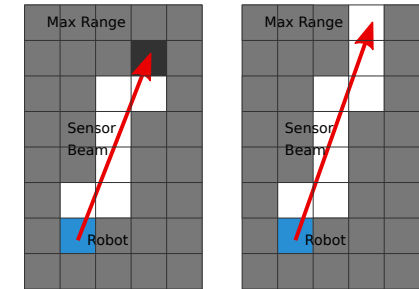

Frontier-based Exploration Strategy

Algorithm 3: Frontier-based Exploration

```

map := init(robot, scan);
while there are some reachable frontiers do
  Update occupancy map using new sensor data and Bayes rule;
   $\mathcal{M} :=$  Created grid map from map using thresholding;
   $\mathcal{M} :=$  Grow obstacle according to the dimension of the robot;
   $\mathcal{F} :=$  Determine frontier cells from  $\mathcal{M}$ ;
   $\mathcal{F} :=$  Filter out unreachable frontiers from  $\mathcal{F}$ ;
   $f :=$  Select the closest frontier from  $\mathcal{F}$ , e.g. using shortest path;
  path := Plan a path from the current robot position to  $f$ ;
  Navigate robot towards  $f$  along path (for a while);
    
```


Multi-Robot Exploration – Map Merge

- The individual maps can be merged in a similar way as integration of new sensor measurements

$$P(occ_{x,y}) = \frac{odds_{x,y}}{1 + odds_{x,y}},$$

$$odds_{x,y} = \prod_{i=1}^n odds_{x,y}^i,$$

$$odds_{x,y}^i = \frac{P(occ_{x,y}^i)}{1 - P(occ_{x,y}^i)}.$$

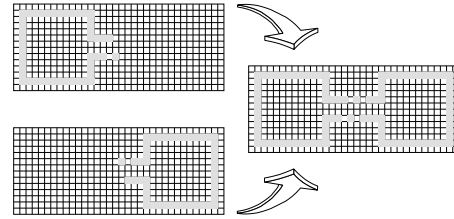


$P(occ_{x,y}^i)$ is the probability that grid cell on the global coordinate is occupied in the map of the robot.

We need the same global reference frame (localization).

Exploration Procedure – Decision-Making Parts

- Initialize – set plans for m robots, $\mathcal{P} = (P_1, \dots, P_m)$, $P_i = \emptyset$.
- Repeat
 - Navigate robots** using the plans \mathcal{P} ;
 - Collect new measurements;
 - Update the navigation map \mathcal{M} ;


Until replanning condition is met.
- Determine goal candidates \mathbf{G}** from \mathcal{M} .
- If $|\mathbf{G}| > 0$ assign goals to the robots
 - $(\langle r_1, g_{r_1} \rangle, \dots, \langle r_m, g_{r_m} \rangle) = \text{assign}(\mathbf{R}, \mathbf{G}, \mathcal{M})$, $r_i \in \mathbf{R}, g_{r_i} \in \mathbf{G}$;
 - Plan paths** to the assigned goals $\mathcal{P} = \text{plan}(\langle r_1, g_{r_1} \rangle, \dots, \langle r_m, g_{r_m} \rangle, \mathcal{M})$;
 - Go to Step 2.
- Stop all robots or navigate them to the depot

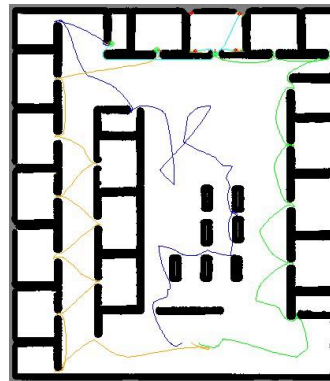

All reachable parts of the environment are explored.

Multi-Robot Exploration – Overview

- We need to assign navigation waypoint to each robot, which can be formulated as the **task-allocation problem**
- Exploration can be considered as an **iterative procedure**
 - Initialize the occupancy grid Occ
 - $\mathcal{M} \leftarrow \text{create_navigation_grid}(Occ)$
cells of \mathcal{M} have values {freespace, obstacle, unknown}
 - $\mathbf{F} \leftarrow \text{detect_frontiers}(\mathcal{M})$
 - Goal candidates $\mathbf{G} \leftarrow \text{generate}(\mathbf{F})$
 - Assign next goals to each robot $r \in \mathbf{R}$,**
 $(\langle r_1, g_{r_1} \rangle, \dots, \langle r_m, g_{r_m} \rangle) = \text{assign}(\mathbf{R}, \mathbf{G}, \mathcal{M})$
 - Create a plan \mathbf{P}_i for each pair $\langle r_i, g_{r_i} \rangle$**
consisting of simple operations
 - Perform each plan up to s_{max} operations**
At each step, update Occ using new sensor measurements
 - If $|\mathbf{G}| == 0$ exploration finished, otherwise go to Step 2

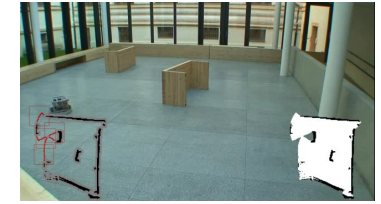


- There are several parts of the exploration procedure where important decisions are made regarding the exploration performance, e.g.
 - How to determined goal candidates from the the frontiers?
 - How to plan a paths and assign the goals to the robots?
 - How to navigate the robots towards the goal?
 - When to replan?
 - etc.

Improvements of the basic Frontier-based Exploration

Several improvements have been proposed in the literature


- Introducing utility as a computation of expected covered area from a frontier
González-Baños, Latombe (2002)
- Map segmentation for identification of rooms and exploration of the whole room by a single robot
Holz, Basilico, Amigoni, Behnke (2010)
- Consider longer planning horizon (as a solution of the Traveling Salesman Problem (TSP))
Zlot, Stentz (2006), Kulich, Faigl (2011, 2012)
- Representatives of free edges
Faigl, Kulich (2015)

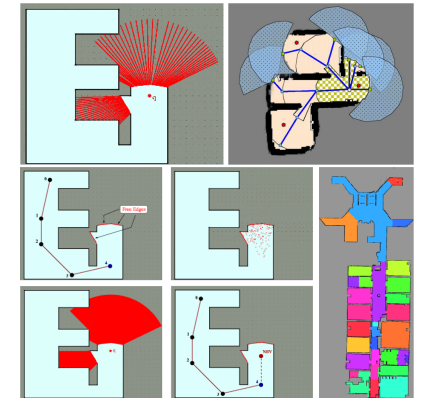

Distance Cost Variants


Simple robot–goal distance

- Evaluate all goals using the robot–goal distance
A length of the path from the robot position to the goal candidate
- Greedy goal selection – the closest one
- Using frontier representatives improves the performance a bit



TSP distance cost

- Consider visitations of all goals
Solve the associated traveling salesman problem (TSP)
- A length of the tour visiting all goals
- Use frontier representatives
- the TSP distance cost improves performance about 10-30% without any further heuristics, e.g., expected coverage (utility)



Kulich, M., Faigl, J, Přeucil, L. (2011): On Distance Utility in the Exploration Task. ICRA.

Multi-Robot Exploration – Problem Definition

A problem of creating a grid map of the unknown environment by a set of m robots $\mathbf{R} = \{r_1, r_2, \dots, r_m\}$.

Exploration is an iterative procedure:

- Collect new sensor measurements
- Determine a set of goal candidates

$$\mathbf{G}(t) = \{g_1, g_2, \dots, g_n\}$$


e.g., frontiers

- At time step t , select next goal for each robot as the **task-allocation problem**

$$\langle \langle r_1, g_{r_1} \rangle, \dots, \langle r_m, g_{r_m} \rangle \rangle = \text{assign}(\mathbf{R}, \mathbf{G}(t), \mathcal{M}(t))$$

using the distance cost function


- Navigate robots towards goal
- If $|\mathbf{G}(t)| > 0$ go to Step 1; otherwise terminate



Multi-Robot Exploration Strategy

- A set of m robots at positions $\mathbf{R} = \{r_1, r_2, \dots, r_m\}$
- At time t , let a set of n goal candidates be $\mathbf{G}(t) = \{g_1, \dots, g_n\}$

i.e., frontiers



- The exploration strategy (at the planning step t):

Select a goal $g \in \mathbf{G}(t)$ for each robot $r \in \mathbf{R}$ that will minimize the required time to explore the environment.

The problem is formulated as the **task-allocation problem**

$$\langle \langle r_1, g_{r_1} \rangle, \dots, \langle r_m, g_{r_m} \rangle \rangle = \text{assign}(\mathbf{R}, \mathbf{G}(t), \mathcal{M}),$$

where \mathcal{M} is the current map

Goal Assignment Strategies – Task Allocation Algorithms

1. Greedy Assignment

Yamauchi B, Robotics and Autonomous Systems 29, 1999

- Randomized greedy selection of the closest goal candidate

2. Iterative Assignment

Werger B, Mataric M, Distributed Autonomous Robotic Systems 4, 2001

- Centralized variant of the broadcast of local eligibility algorithm (BLE)

3. Hungarian Assignment

- Optimal solution of the task-allocation problem for assignment of n goals and m robots in $O(n^3)$

Stachniss C, C implementation of the Hungarian method, 2004

4. Multiple Traveling Salesman Problem – MTSP Assignment

- (cluster–first, route–second), the TSP distance cost

Faigl et al. 2012

MTSP-based Task-Allocation Approach

- Consider the task-allocation problem as the **Multiple Traveling Salesman Problem (MTSP)**
- MTSP heuristic (*cluster-first, route-second*)
 1. Cluster the goal candidates \mathbf{G} to m clusters

$$\mathbf{C} = \{C_1, \dots, C_m\}, C_i \subseteq \mathbf{G}$$

using K-means
 2. For each robot $r_i \in \mathbf{R}, i \in \{1, \dots, m\}$ select the next goal g_i from C_i using the TSP distance cost

Kulich et al., ICRA (2011)

 - Solve the TSP on the set $C_i \cup \{r_i\}$

the tour starts at r_i
 - The next robot goal g_i is the first goal of the found TSP tour

Faigl, J., Kulich, M., Přebí, L. (2012): Goal Assignment using Distance Cost in Multi-Robot Exploration. IROS.

Statistical Evaluation of the Exploration Strategies


- Evaluation for the number of robots m and sensor range ρ

ρ	m	Iterative vs Greedy	Hungarian vs Iterative	MTSP vs Hungarian
3.0	3	+	=	+
3.0	5	+	=	+
3.0	7	+	=	+
3.0	10	+	+	-
4.0	3	+	=	+
4.0	5	+	=	=
4.0	7	+	=	+
4.0	10	+	+	-
5.0	3	+	=	+
5.0	5	+	=	+
5.0	7	+	=	+
5.0	10	+	+	-

Total number of trials 14 280

Performance of the MTSP vs Hungarian Algorithm

- Replanning as quickly as possible; $m = 3, \rho = 3 m$

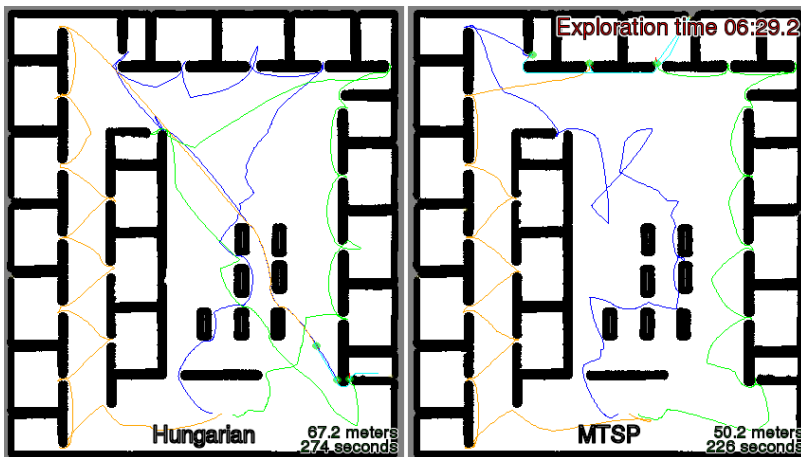

The MTSP assignment provides better performance

Information Theory in Robotic Information Gathering

- Employ information theory in control policy for robotic exploration
 - **Entropy** – uncertainty of x : $H[x] = - \int p(x) \log p(x) dx$
 - **Conditional Entropy** – expected uncertainty of x after learning unknown z ; $H[x|z]$
 - **Mutual information** – how much uncertainty of x will be reduced by learning z ;

$$I_{MI}[x; z] = H[x] - H[x|z]$$
- Control policy is a rule how to select the robot action that reduces the uncertainty of estimate by learning measurements:

$$\operatorname{argmax}_{a \in A} I_{MI}[x; z|a],$$


where A is a set of possible actions, x is a future estimate, and z is future measurement

- Computation of the mutual information is computationally demanding
- **Cauchy-Schwarz Quadratic Mutual Information (CSQMI)** defined similarly to mutual information
 - A linear time approximations for CSQMI

Charrow, B. et al., (2015): Information-theoretic mapping using Cauchy-Schwarz Quadratic Mutual Information. ICRA.
- Compute CSQMI as Cauchy-Schwarz divergence $I_{CS}[m; z]$ – raycast of the sensor beam and determine distribution over the range returns


Actions

- Actions are shortest path to cover the frontiers

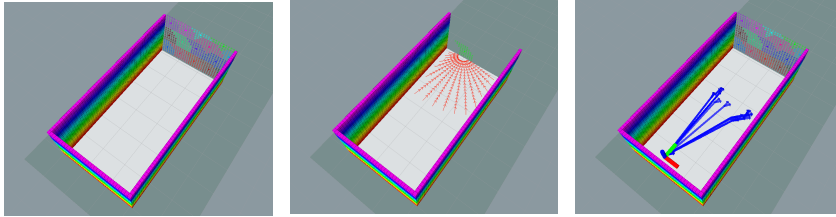

Detect and cluster frontiers Sampled poses to cover a cluster Paths to the sampled poses

- Select an action (a path) that maximizes the rate of Cauchy-Schwarz Quadratic Mutual Information




Robotic Information Gathering

- Robotic information gathering can be considered as the **informative motion planning** problem to determine trajectory \mathcal{P}^* such that

$$\mathcal{P}^* = \operatorname{argmax}_{\mathcal{P} \in \Psi} I(\mathcal{P}), \text{ such that } c(\mathcal{P}) \leq B, \text{ where}$$

- Ψ is the space of all possible robot trajectories,
- $I(\mathcal{P})$ is the information gathered along the trajectory \mathcal{P}
- $c(\mathcal{P})$ is the cost of \mathcal{P} and B is the allowed budget


- Searching the space of all possible trajectories is complex and demanding problem
- A discretized problem can be solved by combinatorial optimization techniques
Usually scale poorly with the size of the problem
- A trajectory is from a continuous domain




- Sampling-based motion planning techniques** can be employed for finding maximally informative trajectories

Hollinger, G., Sukhatme, G. (2014): Sampling-based robotic information gathering algorithms. IJRR.

Example of Autonomous Exploration using CSQMI

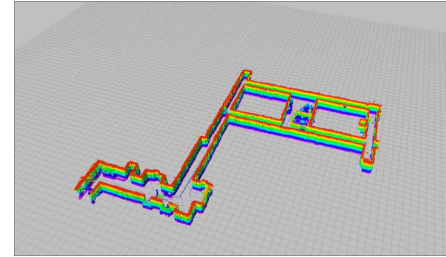

Ground vehicle

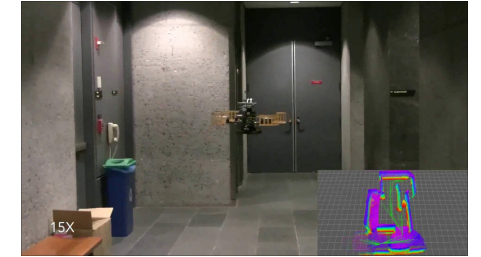

Aerial vehicle

- Planning with trajectory optimization – determine trajectory maximizing I_{CS}
Charrow, B. et al., (2015): Information-Theoretic Planning with Trajectory Optimization for Dense 3D Mapping. RSS.

Summary of the Lecture

Topics Discussed

- Robotic information gathering
- Robotic exploration of unknown environment
- Occupancy grid map
- Frontier based exploration
- Exploration procedure and decision-making
- TSP-based distance cost in frontier-based exploration
- Multi-robot exploration and task-allocation
- Mutual information and informative path planning *informative and motivational*

- **Next: Randomized sampling-based motion planning methods**