

Multi-Goal Path and Motion Planning

Jan Faigl

Department of Computer Science
Faculty of Electrical Engineering
Czech Technical University in Prague

Lecture 07

B4M36UIR – Artificial Intelligence in Robotics

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

1 / 38

Selected Sampling-based Motion Planners

Improved Sampling-based Motion Planners

- Although asymptotically optimal sampling-based motion planners such RRT* or RRG may provide high-quality or even optimal solutions of complex problem, their performance in simple, e.g., 2D scenarios, is relatively poor

In a comparison to the ordinary approaches (e.g., visibility graph)

- They are computationally demanding and performance can be improved similarly as for the RRT, e.g.,
 - Goal biasing, supporting sampling in narrow passages, multi-tree growing (Bidirectional RRT)
- The general idea of improvements is based on **informing** the sampling process
- Many modifications of the algorithms exists, **selected representative** modifications are

- Informed RRT***
- Batch Informed Trees (BIT*)**
- Regionally Accelerated BIT* (RABIT*)**

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

5 / 38

Selected Sampling-based Motion Planners

Batch Informed Trees (BIT*)

- Combining RGG (Random Geometric Graph) with the heuristic in incremental graph search technique, e.g., Lifelong Planning A* (LPA*)
 - The properties of the RGG are used in the RRG and RRT*
- Batches of samples – a new batch starts with denser implicit RGG
- The search tree is updated using LPA* like incremental search to reuse existing information

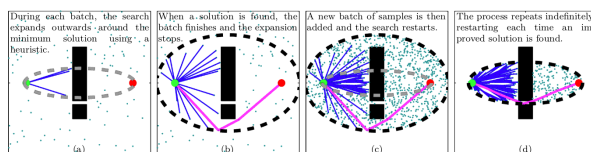


Fig. 3. An illustration of the informed search procedure used by BIT*. The start and goal states are shown as green and red, respectively. The current solution is highlighted in magenta. The subproblem that contains any better solutions is shown as a black dashed line, while the progress of the current batch is shown as a grey dashed line. Fig. (a) shows the growing search of the first batch of samples, and (b) shows the first search ending when a solution is found. After pruning and adding a second batch of samples, Fig. (c) shows the search restarting on a denser graph while (d) shows the second search ending when an improved solution is found. An animated illustration is available in the attached video.

Gammell, J. B., Srinivasa, S. S., Barfoot, T. D. (2015): **Batch Informed Trees (BIT*)**: Sampling-based optimal planning via the heuristically guided search of implicit random geometric graphs. ICRA.

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

8 / 38

Overview of the Lecture

- Part 1 – Improved Sampling-based Motion Planning
 - Selected Sampling-based Motion Planners
- Part 2 – Multi-Goal Path and Motion Planning
 - Multi-Goal Path Planning
 - Multi-Goal Motion Planning
 - Multi-Goal Planning in Robotic Missions

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning


2 / 38

Selected Sampling-based Motion Planners

Informed RRT*

- Focused RRT* search to increase the convergence rate
- Use Euclidean distance as an admissible heuristic
- Ellipsoidal informed subset – the current best solution C_{best}

$$X_F = \{x \in X \mid \|x_{start} - x\|_2 + \|x - x_{goal}\|_2 \leq C_{best}\}$$



- Directly Based on the RRT*
- Having a feasible solution
- Sampling inside the ellipse

```

Algorithm 1: Informed RRT*(x_start, x_goal)
1 V ← {x_start};
2 E ← ∅;
3 X_inform ← ∅;
4 T ← (V, E);
5 for iteration = 1, ..., N do
6   C_best ← min_{x ∈ X_inform} Cost(x);
7   X_inform ← Sample(N_start, X_inform, C_best);
8   X_inform ← RInsert(T, X_inform);
9   X_inform ← Steer(x_start, X_inform);
10  if CollisionFree(x_start, X_inform) then
11    V ← V ∪ {X_inform};
12    X_inform ← Steer(T, X_inform, C_best);
13    X_inform ← X_inform;
14    C_inform ← Cost(X_inform) + c · Line(x_start, X_inform);
15    for X_inform ∈ X_inform do
16      C_inform ← Cost(X_inform) + c · Line(x_start, X_inform);
17      if C_inform < C_best then
18        if CollisionFree(x_start, X_inform) then
19          X_inform ← X_inform;
20          C_best ← C_inform;
21  E ← E ∪ {(X_inform, X_inform)};
22  for X_inform ∈ X_inform do
23    C_inform ← Cost(X_inform);
24    C_inform ← Cost(X_inform) + c · Line(x_start, X_inform);
25    if C_inform < C_best then
26      if CollisionFree(x_start, X_inform) then
27        X_inform ← X_inform;
28        E ← E ∪ {(x_start, X_inform)};
29  if InGoalRegion(x_inform) then
30    X_inform ← x_goal;
31  return T;
  
```

Gammell, J. B., Srinivasa, S. S., Barfoot, T. D. (2014): **Informed RRT***: Optimal Sampling-based Path Planning Focused via Direct Sampling of an Admissible Ellipsoidal Heuristic. IROS.


Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

6 / 38

Selected Sampling-based Motion Planners

Batch Informed Trees (BIT*) – Demo

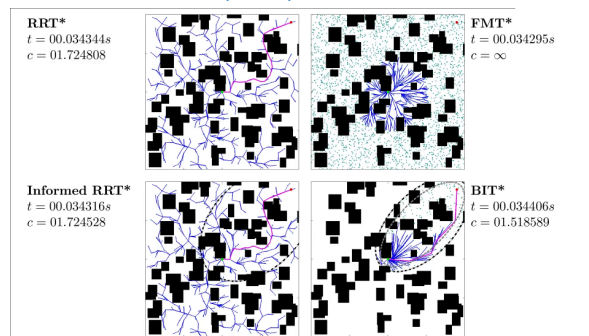

<https://www.youtube.com/watch?v=TQioCC48gp4>

Gammell, J. B., Srinivasa, S. S., Barfoot, T. D. (2015): **Batch Informed Trees (BIT*)**: Sampling-based optimal planning via the heuristically guided search of implicit random geometric graphs. ICRA.

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

9 / 38

Part I

Part 1 – Improved Sampling-based Motion Planning


Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

3 / 38

Selected Sampling-based Motion Planners

Informed RRT* – Demo

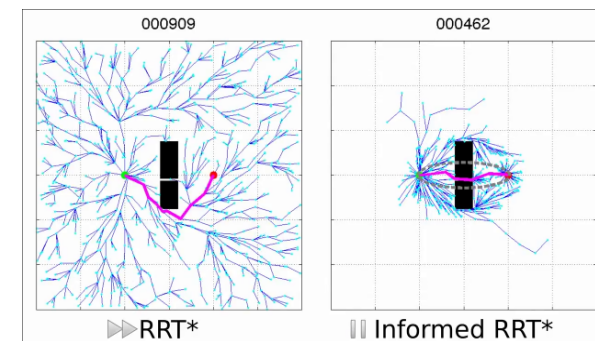

<https://www.youtube.com/watch?v=d7dX5MyDYtc>

Gammell, J. B., Srinivasa, S. S., Barfoot, T. D. (2014): **Informed RRT***: Optimal Sampling-based Path Planning Focused via Direct Sampling of an Admissible Ellipsoidal Heuristic. IROS.

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

7 / 38

Selected Sampling-based Motion Planners

Regionally Accelerated BIT* (RABIT*)

- Use local optimizer with the BIT* to improve the convergence speed
- Local search Covariant Hamiltonian Optimization for Motion Planning (CHOMP) is utilized to connect edges in the search graphs using local information about the obstacles




Fig. 2. An illustration of how the RABIT* algorithm uses a local optimizer to exploit obstacle information and improve a global search. The global search is performed, as in BIT*, by incrementally processing an edge queue (dashed lines) into a tree (a). Using heuristics, the potential edge from x_i to x_k is processed first as it could provide a better solution than an edge from x_i to x_j . The initial straight-line edge is given to a local optimizer which uses information about obstacles to find a local optima between the specified states (b). If this edge is collision free, it is added to the tree and its potential outgoing edges are added to the queue. The next-best edge in the queue is then processed in the same fashion, using the local optimizer to once again propose a better edge than a straight-line (c).


Choudhury, S., Gammell, J. D., Barfoot, T. D., Srinivasa, S. S., Scherer, S. (2016): **Regionally Accelerated Batch Informed Trees (RABIT*)**: A Framework to Integrate Local Information into Optimal Path Planning. ICRA.

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

10 / 38

Regionally Accelerated BIT* (RABIT*) – Demo

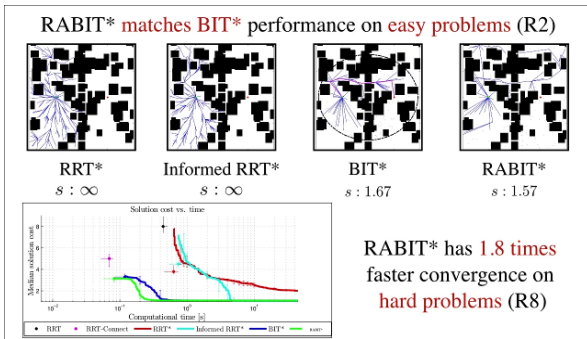

<https://www.youtube.com/watch?v=mgq-DW36jSo>

Choudhury, S., Gammell, J. D., Barfoot, T. D., Srinivasa, S. S., Scherer, S. (2016): Regionally Accelerated Batch Informed Trees (RABIT*): A Framework to Integrate Local Information into Optimal Path Planning. ICRA.

Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 11 / 38

Multi-Goal Path Planning Multi-Goal Motion Planning Multi-Goal Planning in Robotic Missions


Multi-Goal Path Planning

Motivation

Having a set of locations (goals) to be visited, determine the cost-efficient path to visit them and return to a starting location.

- Locations where a robotic arm performs some task
- Locations where a mobile robot has to be navigated

To perform measurements such as scan the environment or read data from sensors.

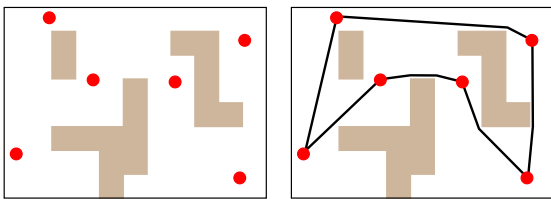

Alatartsev, S., Stellmacher, S., Ortmeier, F. (2015): Robotic Task Sequencing Problem: A Survey. Journal of Intelligent & Robotic Systems.


Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 15 / 38

Multi-Goal Path Planning Multi-Goal Motion Planning Multi-Goal Planning in Robotic Missions

Multi-Goal Path Planning (MTP) Problem

Given a map of the environment \mathcal{W} , mobile robot \mathcal{R} , and a set of locations, what is the shortest possible collision free path that visits each location exactly once and returns to the origin location.

- MTP problem is a robotic variant of the TSP with the edge costs as the length of the shortest path connecting the locations
- For n locations, we need to compute up to n^2 shortest paths (solve n^2 motion planning problems)
- The paths can be found as the shortest path in a graph (roadmap), from which the $G(V, E)$ for the TSP can be constructed



Visibility graph as the roadmap for a point robot provides a straight forward solution, but such a shortest path may not be necessarily feasible for more complex robots

Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 18 / 38

Overview of Improved Algorithm

- Optimal motion planning is an active research field

Approaches	Constraints	Planning Mode	Kinematic Model	Sampling Strategy	Metric
1. RRT* [7]	Holonomic	Offline	Point	Uniform	Euclidean
2. Anytime RRT* [4]	Non-holonomic	Online	Dubin Car	Uniform	Euclidean + Velocity
3. B-RRT* [58]	Holonomic	Offline	Rigid Body	Local bias	Goal biased
4. RRT*FN [33]	Holonomic	Offline	Robotic Arm	Uniform	Cumulative Euclidean
5. RRT*-Smart [35]	Holonomic	Offline	Point	Intelligent	Euclidean
6. Optimal B-RRT* [36]	Holonomic	Offline	Point	Uniform	Euclidean
7. RRTs [50]	Holonomic	Offline	Point	Uniform	Euclidean
8. Adapted RRT* [64], [49]	Non-holonomic	Offline	Car-like and UAV	Uniform	A* Heuristic
9. SRRT* [44]	Non-holonomic	Offline	UAV	Uniform	Geometric + dynamic constraint
10. Informed RRT* [34]	Holonomic	Offline	Point	Direct Sampling	Euclidean
11. IB-RRT* [37]	Holonomic	Offline	Point	Intelligent	Greedy + Euclidean
12. DT-RRT [39]	Non-holonomic	Offline	Car-like	Hybrid	Angular + Euclidean
13. RRT* [3]	Non-holonomic	Online	UAV	Local Sampling	A* Heuristic
14. RTR-CS* [43]	Non-holonomic	Offline	Car-like	Uniform + Local Planning	Angular + Euclidean
15. Mitsubishi RRT* [2]	Non-holonomic	Online	Autonomous Car	Two-stage sampling	Weighted Euclidean
16. CARRT* [65]	Non-holonomic	Online	Humanoid	Uniform	MW Energy Cost
17. PRRT* [48]	Non-holonomic	Offline	P3-DX	Uniform	Euclidean

Noreen, I., Khan, A., Habib, Z. (2016): Optimal path planning using RRT* based approaches: a survey and future directions. IJACSA.

Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 12 / 38

Multi-Goal Path Planning Multi-Goal Motion Planning Multi-Goal Planning in Robotic Missions

Traveling Salesman Problem (TSP)

Given a set of cities and the distances between each pair of cities, what is the shortest possible route that visits each city exactly once and returns to the origin city.

- The TSP can be formulated for a graph $G(V, E)$, where V denotes a set of locations (cities) and E represents edges connecting two cities with the associated travel cost c (distance), i.e., for each $v_i, v_j \in V$ there is an edge $e_{ij} \in E$, $e_{ij} = (v_i, v_j)$ with the cost c_{ij} .
- If the associated cost of the edge (v_i, v_j) is the Euclidean distance $c_{ij} = |(v_i, v_j)|$, the problem is called the **Euclidean TSP** (ETSP).
In our case, $v \in V$ represents a point in \mathbb{R}^2 and solution of the ETSP is a path in the plane.
- It is known, the TSP is NP-hard (its decision variant) and several algorithms can be found in literature.
William J. Cook (2012) – In Pursuit of the Traveling Salesman: Mathematics at the Limits of Computation

Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 16 / 38

Multi-Goal Path Planning Multi-Goal Motion Planning Multi-Goal Planning in Robotic Missions

Multi-Goal Motion Planning

- In the previous cases, we consider existing roadmap or relatively "simple" collision free (shortest) paths in the polygonal domain
- However, determination of the collision-free path in a high dimensional configuration space (\mathcal{C} -space) can be a challenging problem itself
- Therefore, we can generalize the MTP to multi-goal motion planning (MGMP) considering motion (trajectory) planners in \mathcal{C} -space.
- An example of MGMP can be

Plan a cost efficient trajectory for hexapod walking robot to visit a set of target locations.



Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 20 / 38

Part II


Part 2 – Multi-Goal Path and Motion Planning

Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 13 / 38

Multi-Goal Path Planning Multi-Goal Motion Planning Multi-Goal Planning in Robotic Missions

Solutions of the TSP

- Efficient heuristics from the Operational Research have been proposed
- LKH – K. Helsgaun efficient implementation of the Lin-Kernighan heuristic (1998)
<http://www.akira.ruc.dk/~keld/research/LKH/>
- Concorde – Solver with several heuristics and also optimal solver
<http://www.math.uwaterloo.ca/tsp/concorde.html>



Problem Berlin52 from the TSPLIB

Beside the heuristic and approximations algorithms (such as Christofides 3/2-approximation algorithm), other („soft-computing”) approaches have been proposed, e.g., based on genetic algorithms, and memetic approaches, ant colony optimization (ACO), and neural networks.

Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 17 / 38

Multi-Goal Path Planning Multi-Goal Motion Planning Multi-Goal Planning in Robotic Missions


Problem Statement – MGMP Problem

- The working environment $\mathcal{W} \subset \mathbb{R}^3$ is represented as a set of obstacles $\mathcal{O} \subset \mathcal{W}$ and the robot configuration space \mathcal{C} describes all possible configurations of the robot in \mathcal{W}
- For $q \in \mathcal{C}$, the robot body $\mathcal{A}(q)$ at q is collision free if $\mathcal{A}(q) \cap \mathcal{O} = \emptyset$ and all collision free configurations are denoted as \mathcal{C}_{free}
- Set of n goal locations is $\mathcal{G} = (g_1, \dots, g_n)$, $g_i \in \mathcal{C}_{free}$
- Collision free path from q_{start} to q_{goal} is $\kappa : [0, 1] \rightarrow \mathcal{C}_{free}$ with $\kappa(0) = q_{start}$ and $d(\kappa(1), q_{end}) < \epsilon$, for an admissible distance ϵ
- Multi-goal path τ is **admissible** if $\tau : [0, 1] \rightarrow \mathcal{C}_{free}$, $\tau(0) = \tau(1)$ and there are n points such that $0 \leq t_1 \leq t_2 \leq \dots \leq t_n$, $d(\tau(t_i), v_i) < \epsilon$, and $\bigcup_{1 \leq i \leq n} v_i = \mathcal{G}$
- The problem is to find the path τ^* for a cost function c such that $c(\tau^*) = \min\{c(\tau) \mid \tau \text{ is admissible multi-goal path}\}$

Jan Faigl, 2017 B4M36UIR – Lecture 07: Multi-Goal Planning 21 / 38

MGMP – Examples of Solutions

- Determination of all paths connecting any two locations $g_i, g_j \in \mathcal{G}$ is usually very computationally demanding
- Several approaches can be found in literature, e.g.,
 - Considering Euclidean distance as approximation in solution of the TSP as the Minimum Spanning Tree (MST) – Edges in the MST are iteratively refined using optimal motion planner until all edges represent a feasible solution
 - Saha, M., Roughgarden, T., Latombe, J.-C., Sánchez-Ante, G. (2006): *Planning Tours of Robotic Arms among Partitioned Goals*. IJRR.
 - **Synergistic Combination of Layers of Planning (SyCLoP)** – A combination of route and trajectory planning
 - Plaku, E., Kavrakı, L.E., Vardi, M.Y. (2010): *Motion Planning With Dynamics by a Synergistic Combination of Layers of Planning*. T-RO.
 - Steering RRG roadmap expansion by unsupervised learning for the TSP

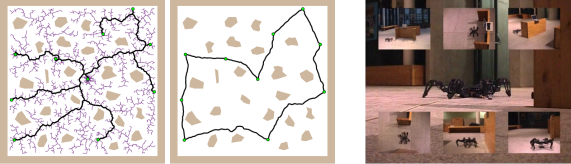

Faigl (2016), WSOM

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

22 / 38

Multi-Goal Path Planning


Multi-Goal Motion Planning

Multi-Goal Planning in Robotic Missions

Inspection Planning – Decoupled Approach

1. Determine sensing locations such that the whole environment would be inspected (seen) by visiting them

A solution of the Art Gallery Problem

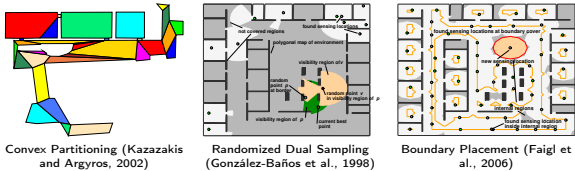

Convex Partitioning (Kazazakis and Argyros, 2002)

Randomized Dual Sampling (González-Baños et al., 1998)

Boundary Placement (Faigl et al., 2006)

The problem is related to the **sensor placement** or **sampling design**

2. Create a roadmap connecting the sensing location

E.g., using visibility graph or randomized sampling based approaches

3. Find the inspection path visiting all the sensing locations as a solution of the multi-goal path planning (a solution of the robotic TSP)

Inspection planning can also be called as **coverage path planning** in the literatureGalceran, E., Carreras, M. (2013): *A survey on coverage path planning for robotics*. Robotics and Autonomous Systems.

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

26 / 38

Multi-Goal Path Planning

Multi-Goal Motion Planning

Multi-Goal Planning in Robotic Missions

Self-Organizing Maps based Solution of the TSP


Kohonen's type of unsupervised two-layered neural network

- Neurons' **weights** represent **nodes** $\mathcal{N} = \{\nu_1, \dots, \nu_m\}$ in a plane
- Nodes are organized into a **ring**
- Sensing locations $\mathcal{S} = \{s_1, \dots, s_n\}$ are presented to the network in a **random** order
- Nodes **compete** to be winner according to their distance to the presented goal s

$$\nu^* = \operatorname{argmin}_{\nu \in \mathcal{N}} |\mathcal{D}(\nu, s)|$$

- The **winner** and its **neighbouring** nodes are adapted (**moved**) towards the city according to the neighbouring function

$$f(\sigma, d) = \begin{cases} e^{-\frac{d^2}{2\sigma^2}} & \text{for } d < m/nr, \\ 0 & \text{otherwise,} \end{cases}$$



- Best matching unit ν to the presented prototype s is determined according to distance function $|\mathcal{D}(\nu, s)|$
- For the Euclidean TSP, \mathcal{D} is the Euclidean distance
- However, for problems with obstacles, the multi-goal path planning, \mathcal{D} should correspond to the length of the shortest, collision free path

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

29 / 38

Multi-Goal Path Planning in Robotic Missions

Multi-goal path planning

- It builds on a simple path and trajectory planning
- It is a **combinatorial optimization problem** to **determine the sequence** to visit the given locations
- It allows to solve (or improve performance of) more complex problems such as
 - **Inspection planning** - Find the shortest tour to see (inspect) the given environment
 - **Surveillance planning** - Find the shortest (a cost efficient) tour to periodically monitor/capture the given objects/regions of interest
 - **Data collection planning** – Determine a cost efficient path to collect data from the sensor stations (locations)
 - **Robotic exploration** - Create a map of unknown environment as quickly as possible

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

24 / 38


Multi-Goal Path Planning

Multi-Goal Motion Planning

Multi-Goal Planning in Robotic Missions

Example – Inspection Planning with AUV

- Determine shortest inspection path for Autonomous Underwater Vehicle (AUV) to inspect a propeller of the vessel


https://www.youtube.com/watch?v=8azP_9VnMfM
Englot, B., Hover, F.S. (2013): *Three-dimensional coverage planning for an underwater inspection robot*. Robotics and Autonomous Systems.

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

27 / 38

Multi-Goal Path Planning


Multi-Goal Motion Planning

Multi-Goal Planning in Robotic Missions

Inspection Planning

Motivations (examples)

- Periodically visit particular locations of the environment to check, e.g., for intruders, and return to the starting locations
- Based on available plans, provide a guideline how to search a building to find possible victims as quickly as possible (search and rescue scenario)

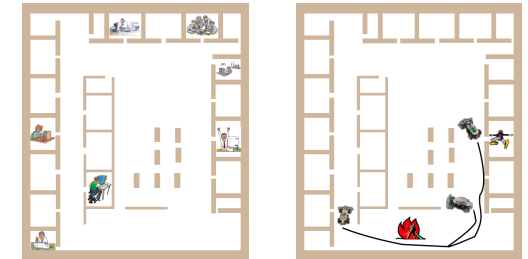

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

25 / 38

Multi-Goal Path Planning


Multi-Goal Motion Planning

Multi-Goal Planning in Robotic Missions

Inspection Planning – “Continuous Sensing”

- If we do not prescribe a discrete set of sensing locations, we can formulate the problem as the **Watchman route problem**

Given a map of the environment \mathcal{W} determine the shortest, closed, and collision-free path, from which the whole environment is covered by an omnidirectional sensor with the radius ρ

Faigl, J. (2010): *Approximate Solution of the Multiple Watchman Routes Problem with Restricted Visibility Range*. IEEE Transactions on Neural Networks.

Jan Faigl, 2017

B4M36UIR – Lecture 07: Multi-Goal Planning

28 / 38

Multi-Goal Path Planning

Multi-Goal Motion Planning

Multi-Goal Planning in Robotic Missions

SOM for the Multi-Goal Path Planning

Unsupervised learning procedure

Algorithm 1: SOM-based MTP solver

```

 $\mathcal{N} \leftarrow \text{initialization}(\nu_1, \dots, \nu_m);$ 
repeat
  error  $\leftarrow 0$ ;
  foreach  $g \in \Pi(\mathcal{S})$  do
     $\nu^* \leftarrow$ 
      selectWinner  $\operatorname{argmin}_{\nu \in \mathcal{N}} |S(g, \nu)|;$ 
      adapt( $S(g, \nu), \mu f(\sigma, l) |S(g, \nu)|$ );
    error  $\leftarrow \max\{\text{error}, |S(g, \nu^*)|\};$ 
   $\sigma \leftarrow (1 - \alpha)\sigma;$ 
until error  $\leq \delta;$ 

```



- For multi-goal path planning – the **selectWinner** and **adapt** procedures are based on the solution of the **path planning problem**

Faigl, J. et al. (2011): *An Application of Self-Organizing Map in the non-Euclidean Traveling Salesman Problem*. Neurocomputing.

Jan Faigl, 2017


B4M36UIR – Lecture 07: Multi-Goal Planning

30 / 38

SOM for the TSP in the Watchman Route Problem

During the unsupervised learning, we can compute **coverage** of \mathcal{W} from the current **ring** (solution represented by the neurons) and **adapt** the network **towards uncovered parts** of \mathcal{W}

- Convex cover set of \mathcal{W} created on top of a triangular mesh
- Incident convex polygons with a straight line segment are found by walking in a triangular mesh technique

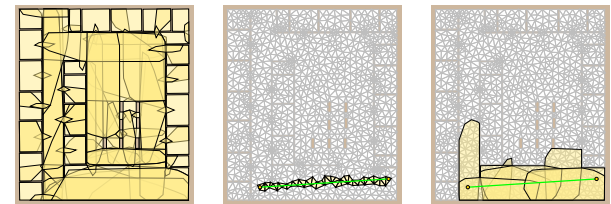

Faigl, J. (2010), TNN

Jan Faigl, 2017


B4M36UIR – Lecture 07: Multi-Goal Planning

31 / 38

Multi-Goal Path Planning with Goal Regions

- It may be sufficient to visit a goal region instead of the particular point location

E.g., to take a sample measurement at each goal

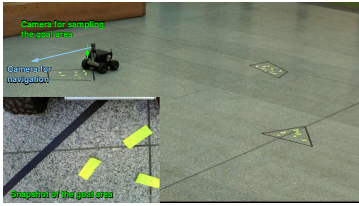


Not only a sequence of goals visit has to be determined, but also an appropriate sensing location for each goal need to be found

The problem with goal regions can be considered as a variant of the **Traveling Salesman Problem with Neighborhoods (TSPN)**

Example – TSPN for Inspection Planning with UAV

- Determine a cost-efficient trajectory from which a given set of target regions is covered
- For each target region a subspace $S \subset \mathbb{R}^3$ from which the target can be covered is determined
S represents the neighbourhood
- The PRM motion planning algorithm is utilized to construct a motion planning roadmap (a graph)
- SOM based solution of the TSP with a graph input is generalized to the TSPN



Janoušek and Faigl, (2013) ICRA

Topics Discussed

- Improved sampling-based motion planners
- Multi-goal planning
 - Robotic variant of the Traveling Salesman Problem (TSP)
 - Multi-Goal Path Planning (MTP) problem
 - Multi-Goal Motion Planning (MGMP) problem
- Multi-goal planning in robotic missions
 - Traveling Salesman Problem with Neighborhoods (TSPN)
 - Inspection planning

- Next: Data collection planning**

Traveling Salesman Problem with Neighborhoods

Given a set of n regions (neighbourhoods), what is the shortest closed path that visits each region.

- The problem is NP-hard and APX-hard, it cannot be approximated to within factor $2 - \epsilon$, where $\epsilon > 0$

Safra and Schwartz (2006) – Computational Complexity

- Approximate algorithms exist for particular problem variants

E.g., Disjoint unit disk neighborhoods

- Flexibility of the unsupervised learning for the TSP allows generalizing the unsupervised learning procedure to address the TSPN

- TSPN provides a suitable problem formulation for planning various inspection and data collection missions**

Example – TSPN for Planning with Localization Uncertainty

- Selection of waypoints from the neighborhood of each location
- P3AT ground mobile robot in an outdoor environment



TSP: $L=184$ m, $E_{avg}=0.57$ m

TSPN: $L=202$ m, $E_{avg}=0.35$ m

Real overall error at the goals decreased from 0.89 m \rightarrow 0.58 m (about 35%)


- Decrease localization error at the target locations (indoor)

Small UGV - MMP5

Small UAV - Parrot AR.Drone




Error decreased from 16.6 cm \rightarrow 12.8 cm



Improved success of the locations' visits $83\% \rightarrow 95\%$

Faigl et al., (2012) ICRA

SOM-based Solution of the Traveling Salesman Problem with Neighborhoods (TSPN)

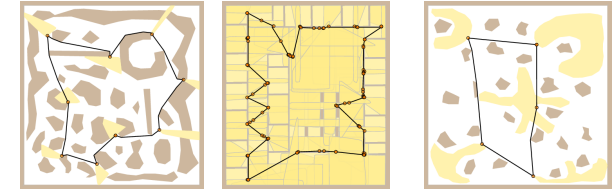

Polygonal Goals
 $n=9$, $T=0.32$ s

Convex Cover Set
 $n=106$, $T=5.1$ s

Non-Convex Goals
 $n=5$, $T=0.1$ s

Faigl, J. et al. (2013): Visiting Convex Regions in a Polygonal Map. Robotics and Autonomous Systems.

Summary of the Lecture