

KATEDRA POČÍTAČOVÉ GRAFIKY A INTERAKCE

# Light & Shading

Jiří Bittner

# Outline


---

- Surface appearance MPG 10
- Radiometry MPG 10.1
- Light sources MPG 10.6
- Surface reflectance models, BRDF MPG 10.2-10.5
- Shading MPG 10.7

# Surface Appearance

---


- Surface geometry
- Light sources
- Surface reflectance

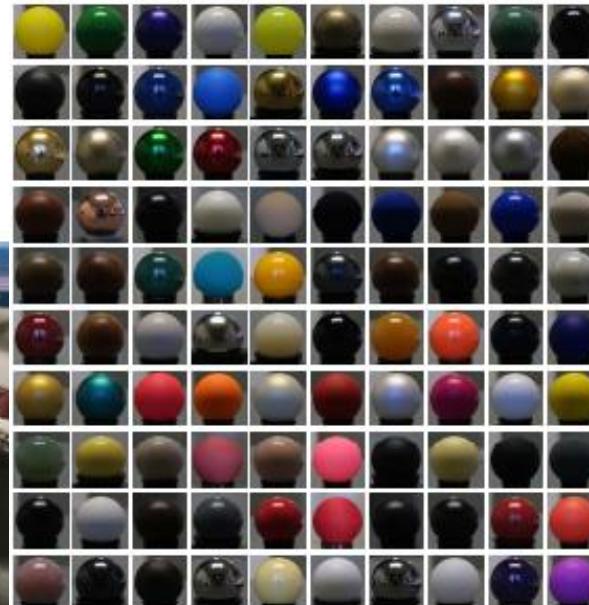

# Illumination Enhances Spatial Cues

---

- Perception of surfaces
  - Surface shape, structure
- Perception of object positions
  - Shadows, indirect illumination

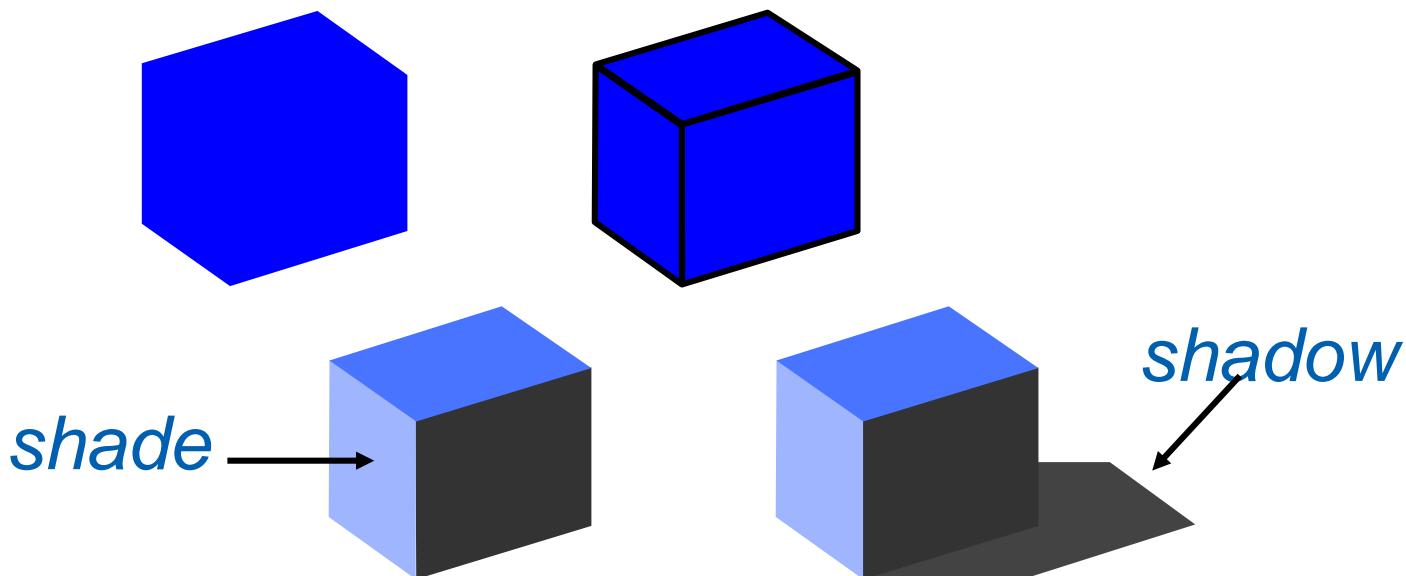

# Light Measurements - Radiometry

---

- Power, Radiant flux (zářivý tok)  $P, \Phi$

$$\Phi = \frac{dQ}{dt} [Js^{-1}, W]$$

- How fast photons stream through a given place
- Photon energy (Planck-Einstein relation)

$$E_f = h f [J]$$

$h = 6.626 \cdot 10^{-34} \text{ Js}$  Planck constant

- Example

- Radiant flux 1W
- Monochromatic red light 600nm
- Number of photons / s =  $1/(h \cdot c / 600 \cdot 10^{-9}) = 3 \cdot 10^{18}$

# Radiometry – cont.

---

- Radiosity (Intenzita vyzařování, Radiozita)

$$B(x) = \frac{d\Phi}{dA} [\text{W/m}^2]$$

- How many photons per unit area is emitted from a given place in unit of time (power density)
- Irradiance (Intenzita ozáření)  $E$ ,  $[\text{W/m}^2]$ 
  - How many photons per unit area and unit time reach given place


# Radiometry – cont.

---

- Radiant intensity (Zářivost)

$$I(x, \omega) = \frac{d\Phi}{d\omega} [\text{W/sr}]$$

- How many photons per unit angle is emitted in given direction in unit time
- Emission characteristics
  - IES standards

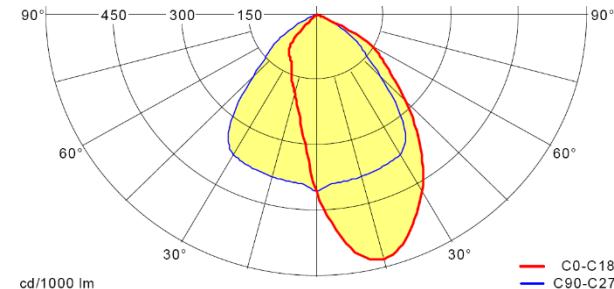


Source: G. Wallner, Geometry of arbitrary light distributions

# Radiometry – cont.

---

- Radiance (Zář)

$$\begin{aligned} L(x, \omega) &= \frac{dE}{d\omega} \\ &= \frac{d^2\Phi(x)}{\cos \theta dA d\omega} \text{ [Wm}^{-2}\text{sr}^{-1}\text{]} \end{aligned}$$

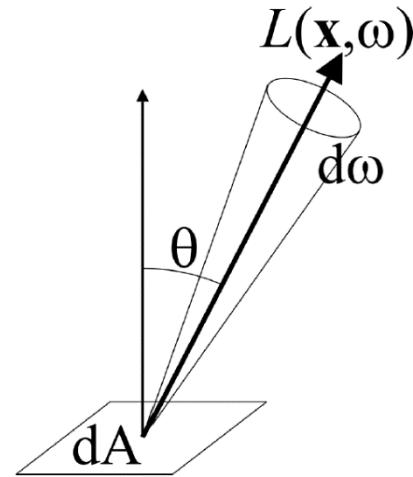

- Camera/eye sensor response is directly **proportional to radiance**
- Other quantities can be obtained by radiance integration


# Radiometry vs Photometry

---

- Radiometry
  - Optical radiation: EM waves  $0.01 \mu\text{m} - 1\text{mm}$  (ultraviolet to infrared)
  - Radiometric quantities functions of wavelength (spectral flux [ $\text{W m}^{-1}$ ], spectral radiance [ $\text{W m}^{-3} \text{sr}^{-1}$ ], ...)
- Photometry
  - Describes light – EM waves visible by human eye (380-780nm)
  - Radiometric quantities weighted by eye spectral response  
(CIE luminance function)

$$P = K_m \int_{380\text{nm}}^{770\text{nm}} V(\lambda) R(\lambda) d\lambda \quad K_m = 680 \text{lumen/watt}$$

Zdroj: P. Dutre – Global Illumination Compendium

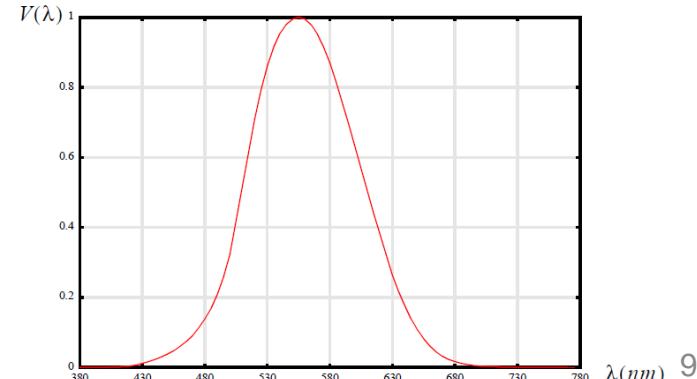

# Radiometric & Photometric Quantities

---

Radiometry			Photometry		
quantity	symbol	unit	quantity	symbol	unit
radiant flux <i>zářivý tok</i>	$\phi$	W	luminous flux <i>světelný tok</i>	$\phi_v$	lm (Lumen)
irradiance <i>intenzita ozáření</i>	E	W/m <sup>2</sup>	illuminance <i>osvětlení</i>	$E_v$	lx (Lux)
radiant intensity <i>zářivost</i>	I	W/sr	luminous intensity <i>svítivost</i>	$I_v$	cd (Candela)
radiance <i>zář</i>	L	Wm <sup>-2</sup> sr <sup>-1</sup>	luminance <i>jas</i>	$L_v$	cd/m <sup>2</sup>

# Exercise – The Sun

---

- Radiant flux of the Sun       $3.86 \cdot 10^{26} \text{ W}$
- Distance of Earth from Sun  $1.5 \cdot 10^{11} \text{ m}$
- Irradiance at upper atmosphere layer?
- **1365 W/m<sup>2</sup>**
  - Solar constant  $1362 \text{ W/m}^2$
- 50% infrared light, 40% visible light, and 10% ultraviolet light
- **546 W/m<sup>2</sup> visible light**

## Exercise – LED Bulb


---

- Luminous flux of 11W LED light bulb  $\Phi_v = 1100lm$
- Distance to a table  $d = 1.5m$
- Direct illuminance at table surface  $E_v = \frac{1100lm}{4\pi d^2} = 38.9\ lx$
- Radiant flux of LED bulb  $\Phi = \frac{1100lm}{680lmW^{-1}} = 1.62W$
- Irradiance on the table surface  $E = \frac{1.62W}{4\pi d^2} = 0.057Wm^{-2}$

# Light Sources


---

- Directional
  - No origin
  - Constant intensity
- Point
  - Intensity decreases
- Spot lights
- Area
  - Penumbra

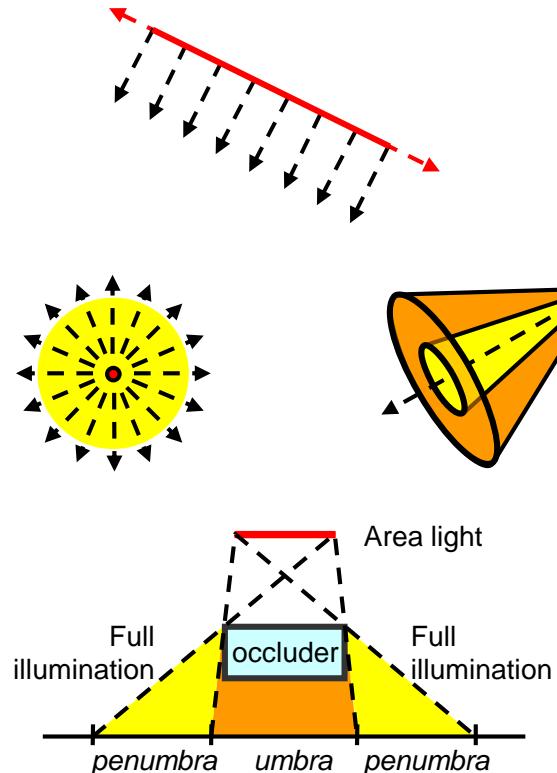


# Light Sources - examples


---

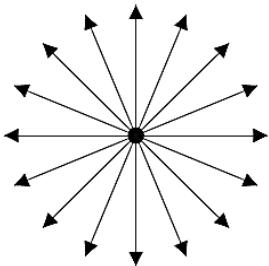


A) Omnidirectional point light




B) Spot light






C) Directional light

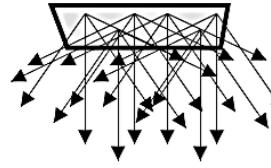

D) Area light

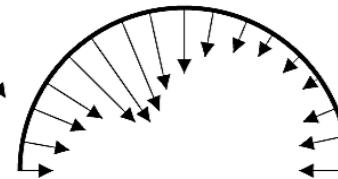

E) Environment map

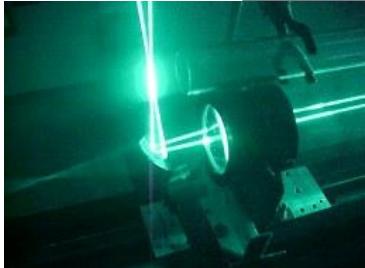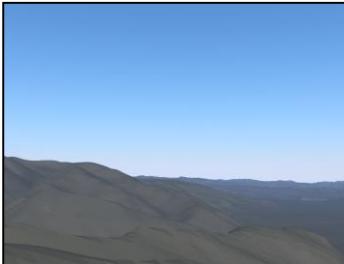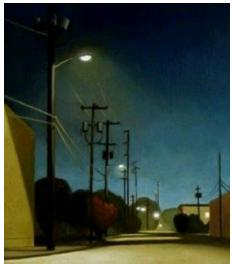

--Photograph by Ron Holle--  
-U. of Illinois Guide to Atmospheric Optics--


# Outline

---

- Surface appearance MPG 10
- Radiometry MPG 10.1
- Light sources MPG 10.6
- Surface reflectance models, BRDF MPG 10.2-10.5
- Shading MPG 10.7

# Light Reflection at Surface

---

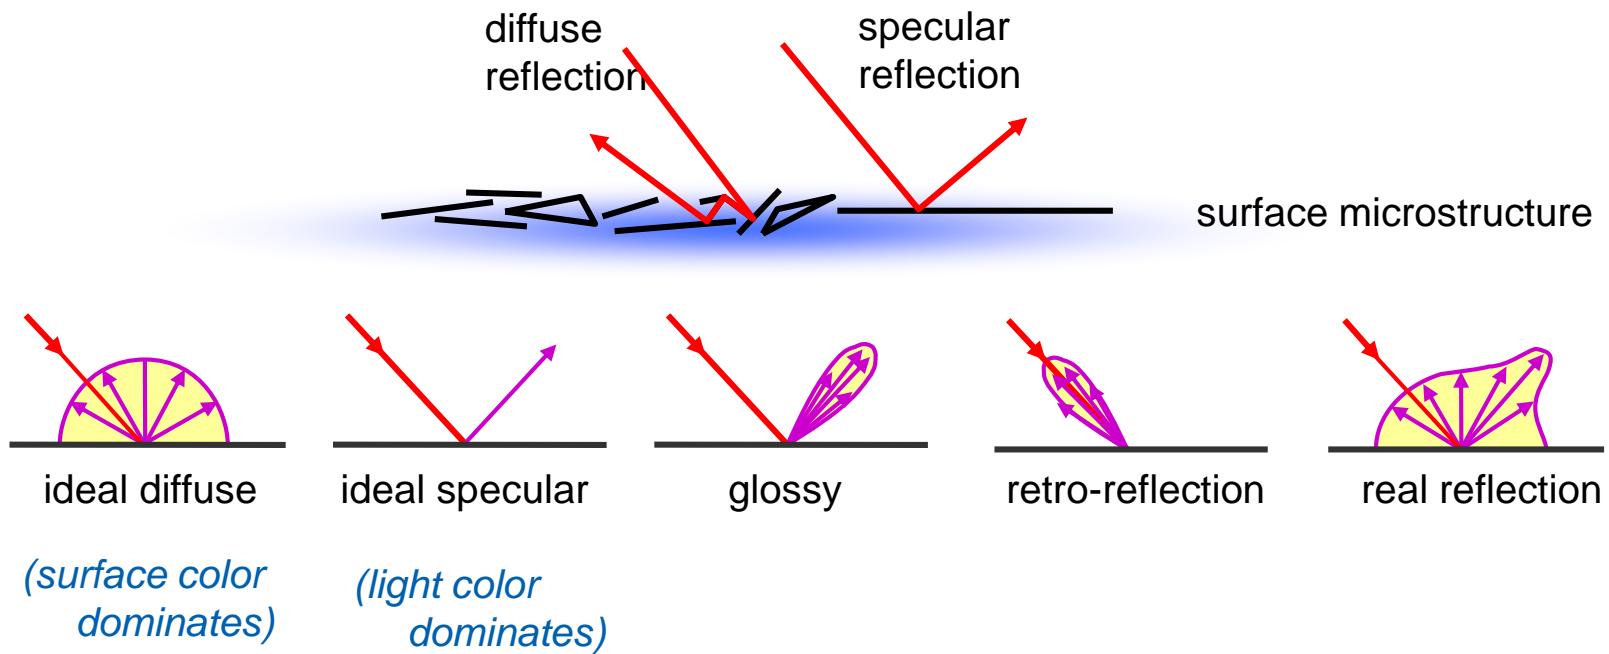

# Light reflection at Surface


---

- BRDF (bidirectional reflection distribution function)

$$f_r(\omega_i, \omega_r) = \frac{dL_r(\omega_r)}{L_i(\omega_i) \cos \Phi_i d\omega_i}$$

$$dL_r(\omega_r) = f_r(\omega_i, \omega_r) L_i(\omega_i) \cos \Phi_i d\omega_i$$


$$L_r(\omega_r) = \int_{\Omega} f_r(\omega_i, \omega_r) L_i(\omega_i) \cos \Phi_i d\omega_i$$

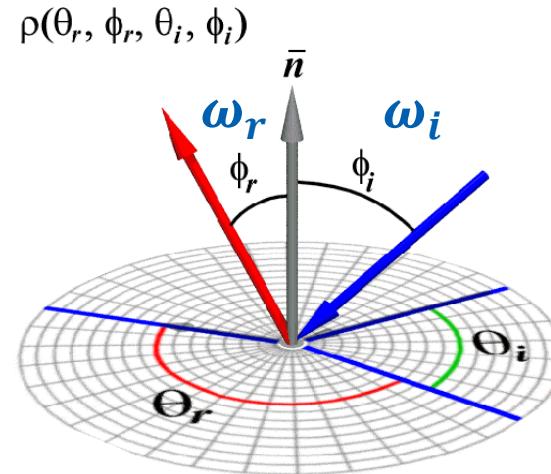

Reflection equation / Rendering equation

# BRDF properties

---


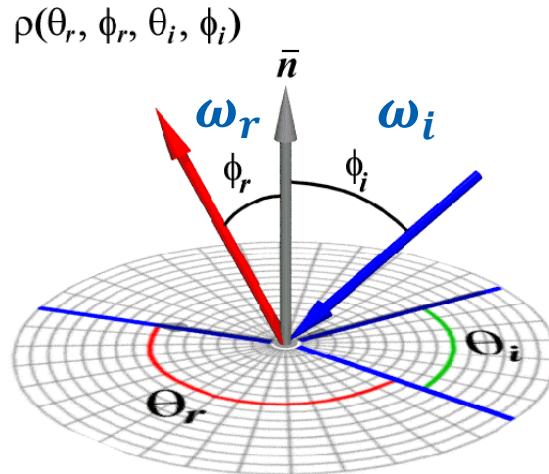


$$\int_{\Omega} f_r(\omega_i, \omega_r) \cos \Phi_i d\omega_i \leq 1 \quad \text{Energy conservation}$$

$$f_r(\omega_i, \omega_r) = f_r(\omega_r, \omega_i) \quad \text{Helmholtz reciprocity}$$

# BRDF Visualization

---

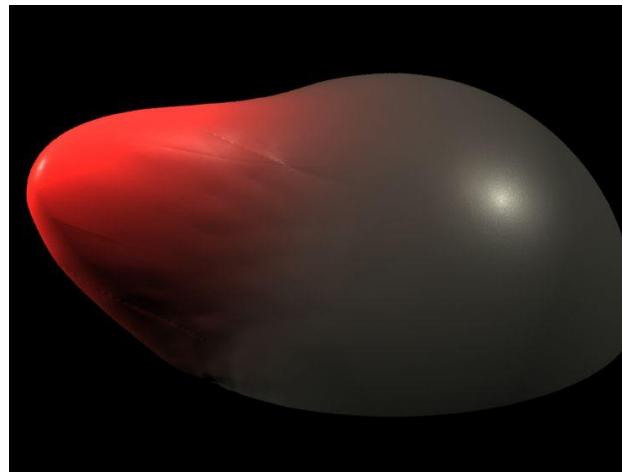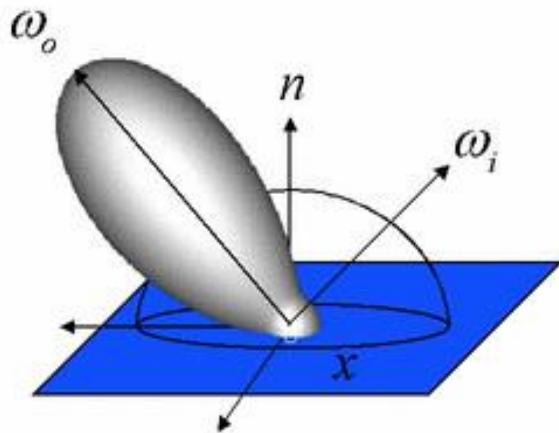

# Other Scattering Models


---

- BTDF - bidirectional transmittance dist. function
- BSDF- bidirectional scattering distribution function
  - BRDF + BTDF
- SVBRDF – spatially varying BRDF
- BSSRDF- bidirectional subsurface scattering reflectance distribution function
- BTF – bidirectional texture function

# BSSRDF

---

- Bidirectional subsurface scattering reflectance distribution function

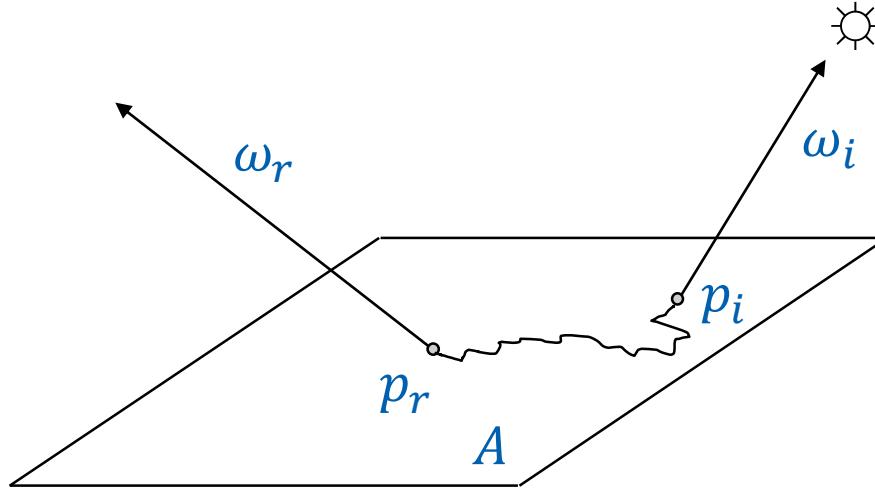

$$L_r(\omega_r) = \int_A \int_{\Omega} s_r(p_i, \omega_i, p_r, \omega_r) L_i(\omega_i) \cos \Phi_i d\omega_i$$

# Scattering Models

---

- Reflection/Shading/Lighting/Illumination model
    - Modeling BSDF / BRDF
  - Scattering model determines surfaces appearance
    - light reflection / refraction
1. Empirical
    - Blinn, Phong, Mineart, ...
  2. Physically based
    - Cook-Torrance, Torrance-Sparrow, ...
  3. Measured BRDF data

# Empirical Scattering Models

---

- Simple mathematical formula
- Easy and fast to evaluate
- Intuitive control

# Phong Illumination Model

---

- Bui-Tuong Phong, dissertation 1973
- Local illumination model
  - Not a physically plausible BRDF model
- Surface color composed of:
  - Ambient light  $I_A$
  - Diffuse reflection  $I_D$
  - Specular reflection  $I_S$
- $I = I_A + I_D + I_S$
- Color computed by components (r, g, b)

# Ambient Component

---

- Omnidirectional illumination (light noise)
  - Mimics global illumination (much simplified!)
  - Constant for the whole scene

$$I_A = C_A \cdot (C_D \cdot k_A)$$

- $C_A$  – color of ambient light
- $C_D$  – surface color (as for diffuse component)
- $k_A \in \langle 0,1 \rangle$  – ambient reflection coefficient


# Diffuse Component

---

- Ideally matte object
- Depends on angle between L and N

$$I_D = C_L \cdot C_D \cdot k_D \cdot \cos(\alpha)$$

- $C_L$  light color
- $C_D$  surface color
- $k_D \in <0,1>$  Diffuse reflection coef.
- $\cos(\alpha) = \text{dot product of } L \text{ and } N$

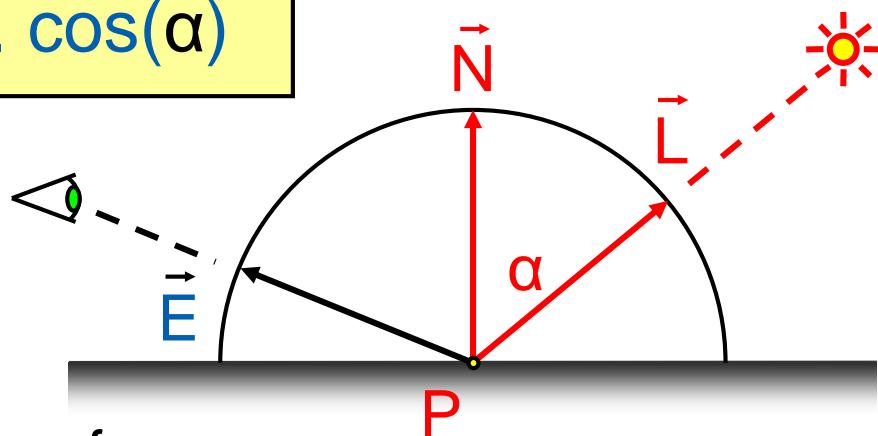


# Specular Component

- Ideally specular object
- Depends on angle between E and R

$$I_S = C_L \cdot C_S \cdot k_S \cdot \cos^h(\beta)$$


- specular color  $C_S$
- $k_S \in <0,1>$
- $h \in <1, \infty>$ , shininess (ostrost odrazu)
- $\cos(\beta) = \text{dot product of } E \text{ and } R$

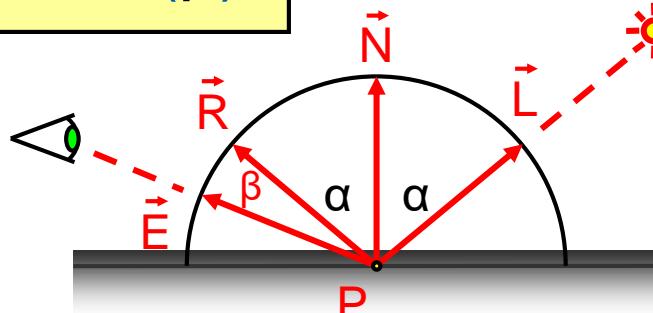

$$R = 2(LN)N - L$$

# Blinn-Phong Illumination Model


- Jim Blinn 1975

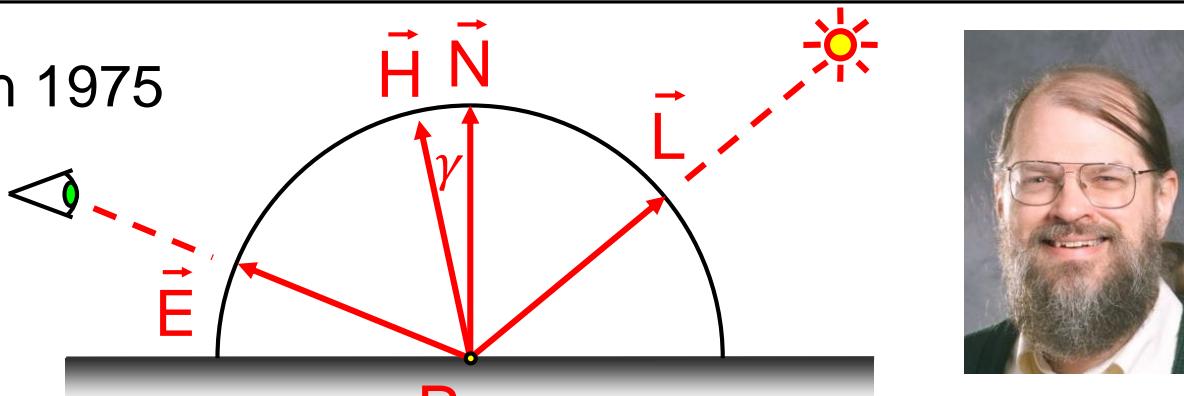

$$H = (L+E)/2$$


$$I_s = C_L \cdot \cancel{C_s} \cdot \cancel{k_s} \cdot \cos^h(\gamma)$$

OpenGL / DirectX

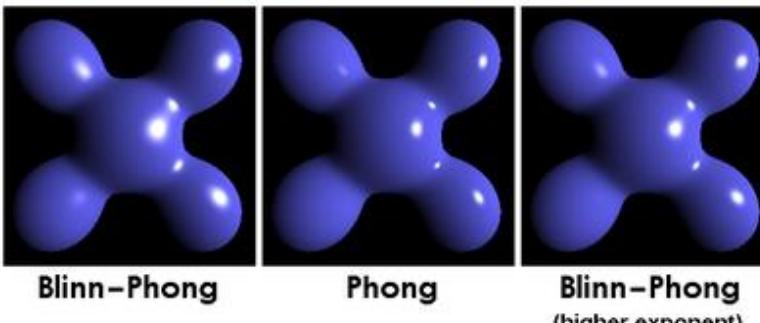

Use 4x higher  $h$  than Phong!


## Examples - Phong

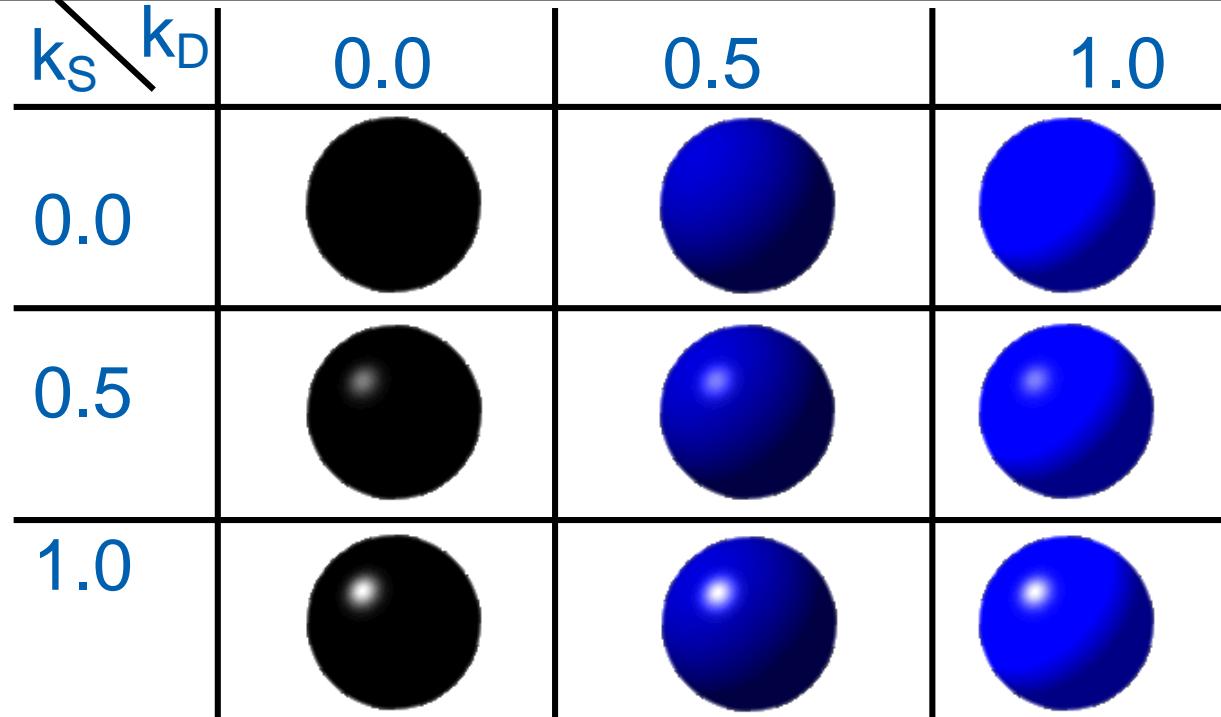

$k_A = 0.0, h = 50$

# Shininess - Phong

---

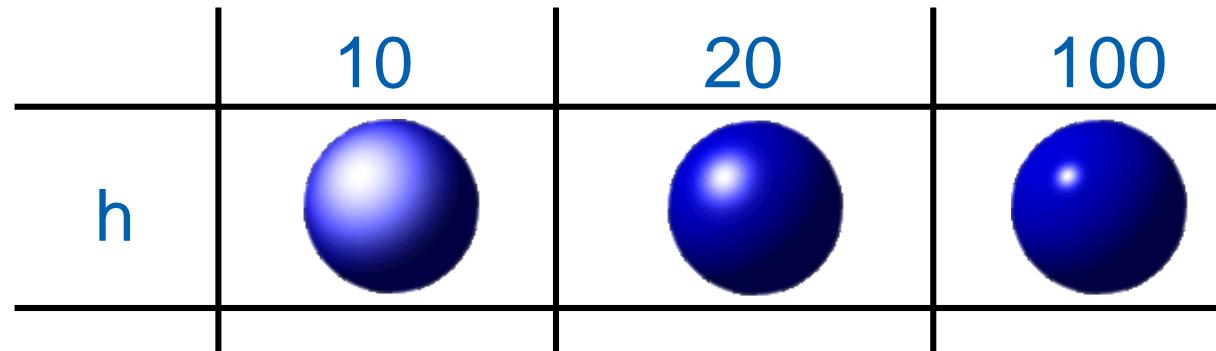

$$k_A = 0.0$$

$$k_D = 0.5$$

$$k_S = 1$$

# Blinn-Phong Model Summary

---

- More light sources  $L_i$

$$I = I_A + \sum_i (I_D + I_S)$$

- Practical setting of Phong model

$$k_A + k_D + k_S \leq 1$$

# Physically Plausible Phong Model

---

- [Lafortune & Willems 1994]

$$f_r(\omega_i, \omega_r) = \frac{k_d}{\pi} + \frac{k_s(n+2)}{2\pi} \cos^n \alpha$$

$$k_s + k_d \leq 1$$

- Helmholtz reciprocity & Energy conservation
  - Use in physically correct renderer !

# Ward BRDF

- Empirical (as Phong, Blinn)
  - Good to fit measured data
- Anisotropic specular reflection!
  - Gaussians
- Params
  - $k_d, k_s, \alpha_x, \alpha_y$

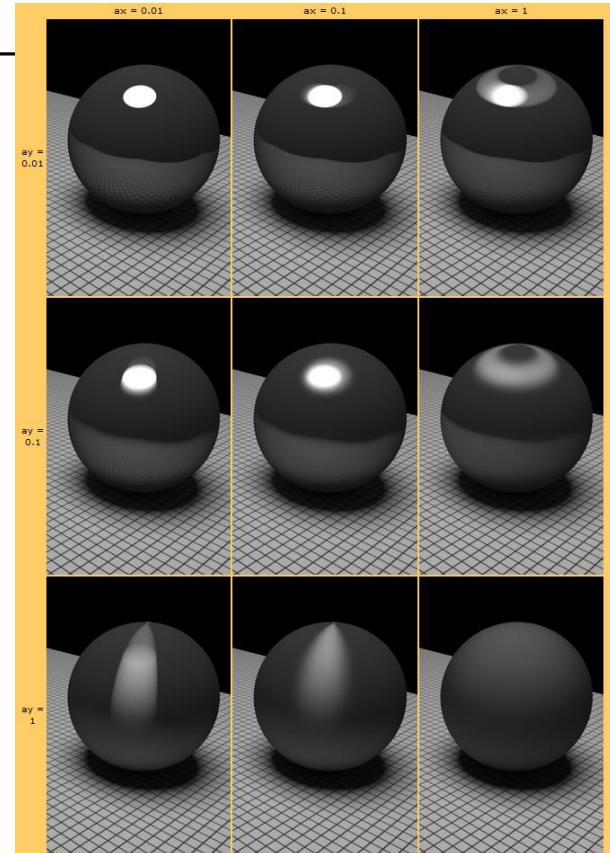
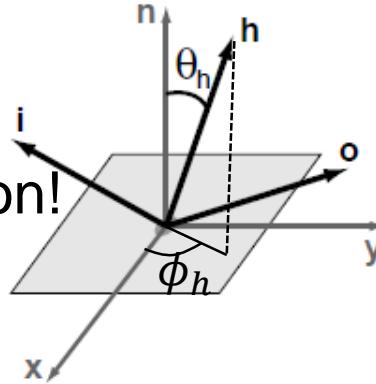


Image: Chia-Kai Liang



# Physically Based Models

---

- Microfacet distribution – “V” grooves
- Normal distribution (D)
- Shadowing-masking (G)
- Fresnel term (F)


# Microfacet models

- Normal distribution (D)
- Microfacet distribution – “V” grooves
  - Model surface roughness

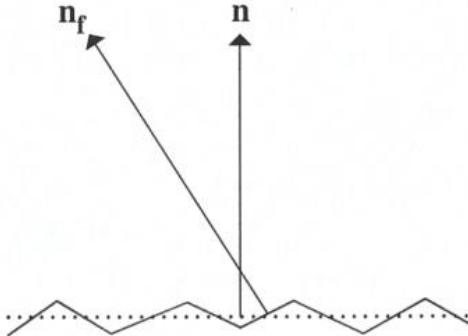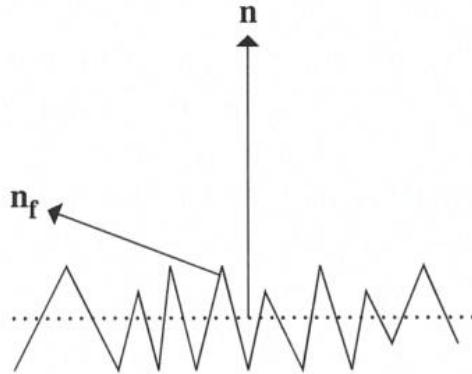




$$D(\omega_h) = \frac{e^{(-\tan^2 \theta_h)/\alpha^2}}{\pi \alpha^2 \cos^4 \theta_h}$$

$\alpha$  roughness

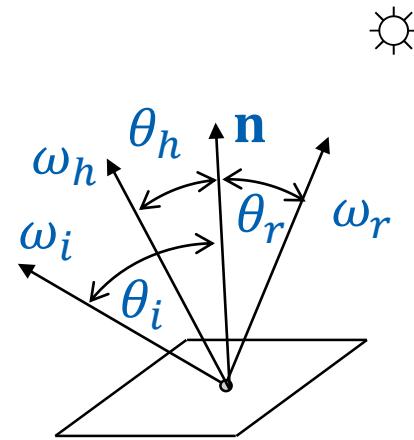

# Microfacet models



- Shadowing-masking (G)

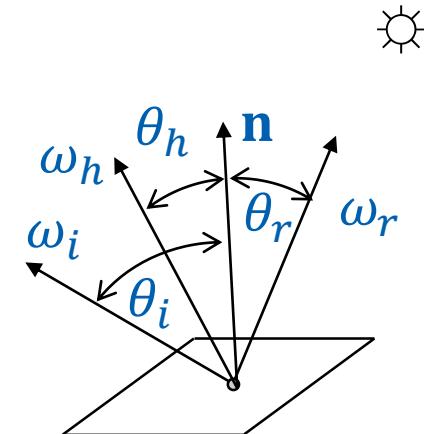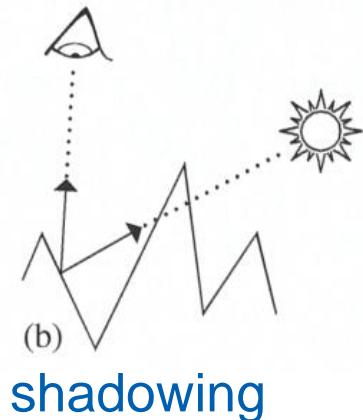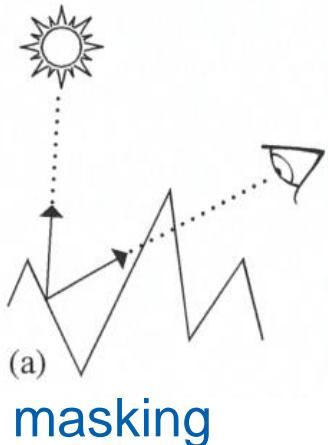

$$G(\omega_i, \omega_r) = \min\left(1, \frac{2 \cos \theta_h \cos \theta_r}{\omega_r h}, \frac{2 \cos \theta_h \cos \theta_i}{\omega_r h}\right)$$

# Microfacet models

- Fresnel term ( $F$ )
  - reflection / transmission on media interface

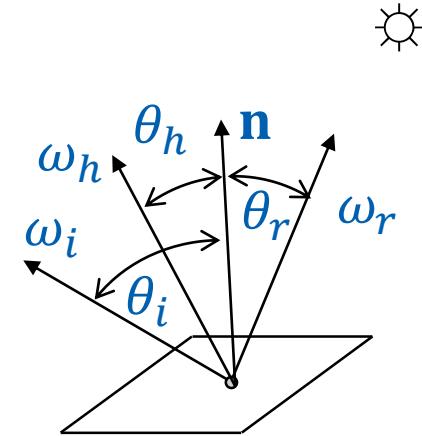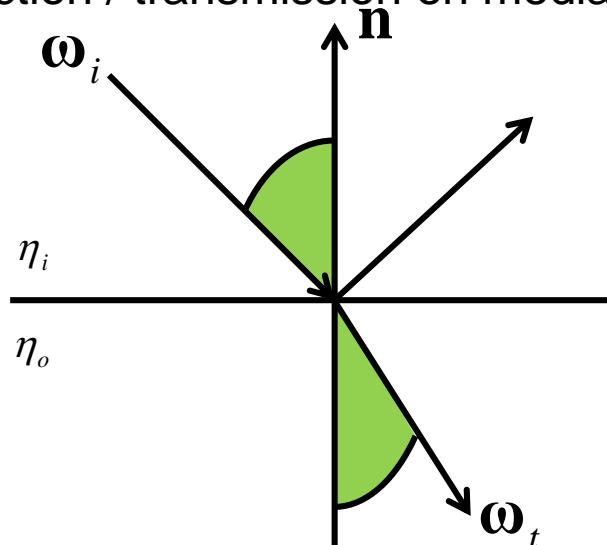

$$F(\omega_r) = F_0 + (1 - F_0)(1 - \cos(\theta_r))^5, F_0 = \left( \frac{\eta_1 - \eta_2}{\eta_1 + \eta_2} \right)^2$$


# Cook-Torrance BRDF for specular surfaces

---

- Specular microfacets
- Normal distribution (D), shadowing-masking (G), Fresnel term (F) ☀

$$f_r(\omega_i, \omega_r) = \frac{D(\omega_h) G(\omega_i, \omega_r) F(\omega_r)}{4 \cos \theta_i \cos \theta_r}$$

Cook & Torrance: A reflectance model for computer graphics, TOG 1982.

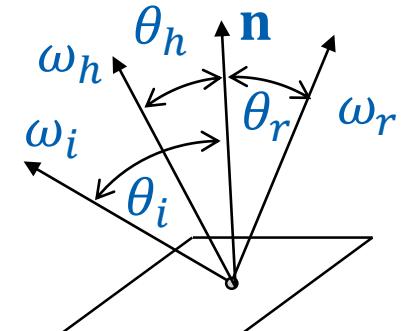

# Oren-Nayar BRDF for diffuse surfaces

- Diffuse microfacets
  - Functional approximation to analytic solution for rough surf.




$$f_r(\omega_i, \omega_r) = \frac{\rho}{\pi} (A + (B \max[0, \cos(\phi_i - \phi_r)] \sin \alpha \tan \beta))$$

$$A = 1 - 0.5 \frac{\sigma^2}{\sigma^2 + 0.33}$$

$$B = 0.45 \frac{\sigma^2}{\sigma^2 + 0.09}$$


$$\alpha = \max(\theta_i, \theta_r)$$

$$\beta = \min(\theta_i, \theta_r)$$

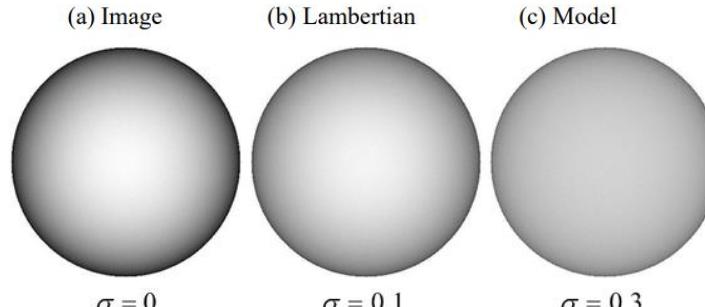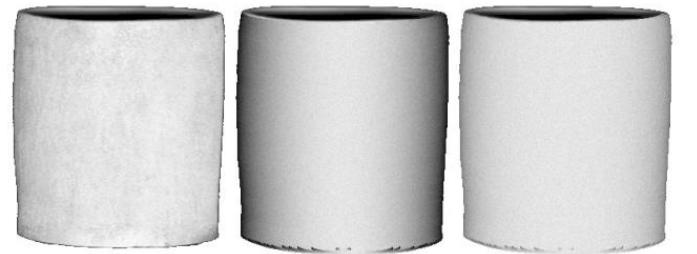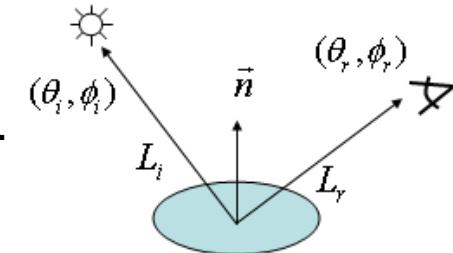

# Layered models

---

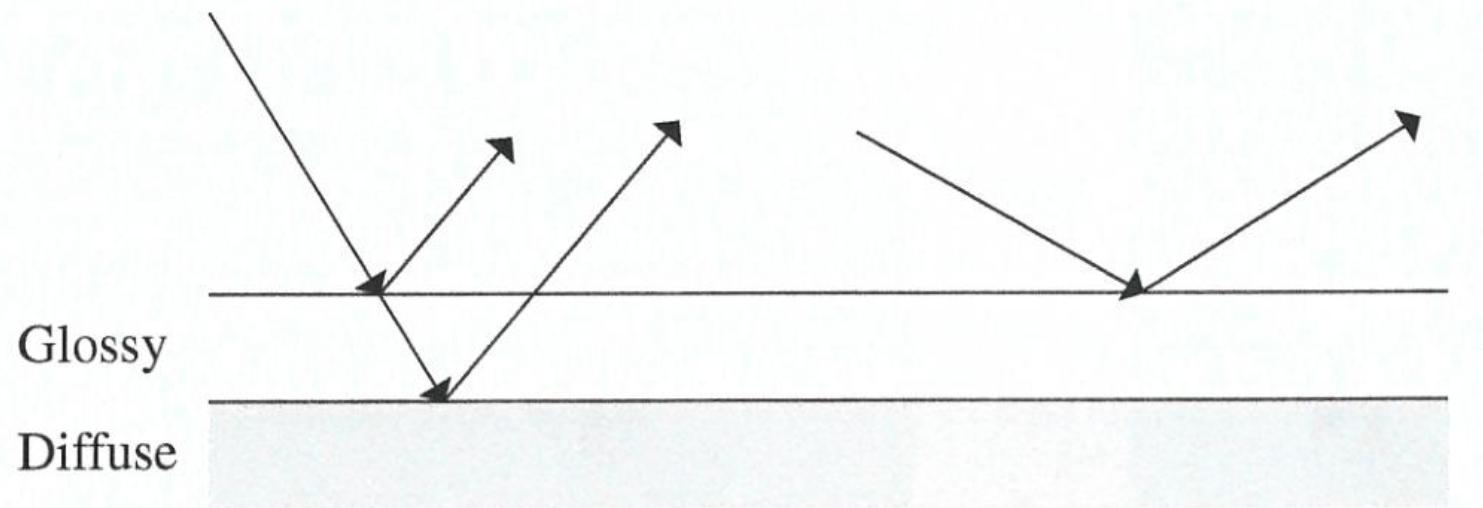


[Ashikhmin and Shirley 2002]

# Current “PBR” models

---

- Cook-Torrance BRDF for specular reflection
- Oren-Nayar BRDF for diffuse reflection
- GGX Distribution for D (and G) terms
  - Walter et al. Microfacet Models for Refraction through Rough Surfaces
  - <https://www.cs.cornell.edu/~srm/publications/EGSR07-btdf.pdf>
- Blending using “metalness / metallic” parameter
  - 0 diffuse + specular reflection using wavelength independent (“white”) base reflectivity  $F_0$
  - 1 only specular reflection using albedo as base reflectivity  $F_0$
- SIGGRAPH 2014 Course: Physically Based Shading in Theory and Practice
  - <https://blog.selfshadow.com/publications/s2014-shading-course/>

# BRDF Models - Overview

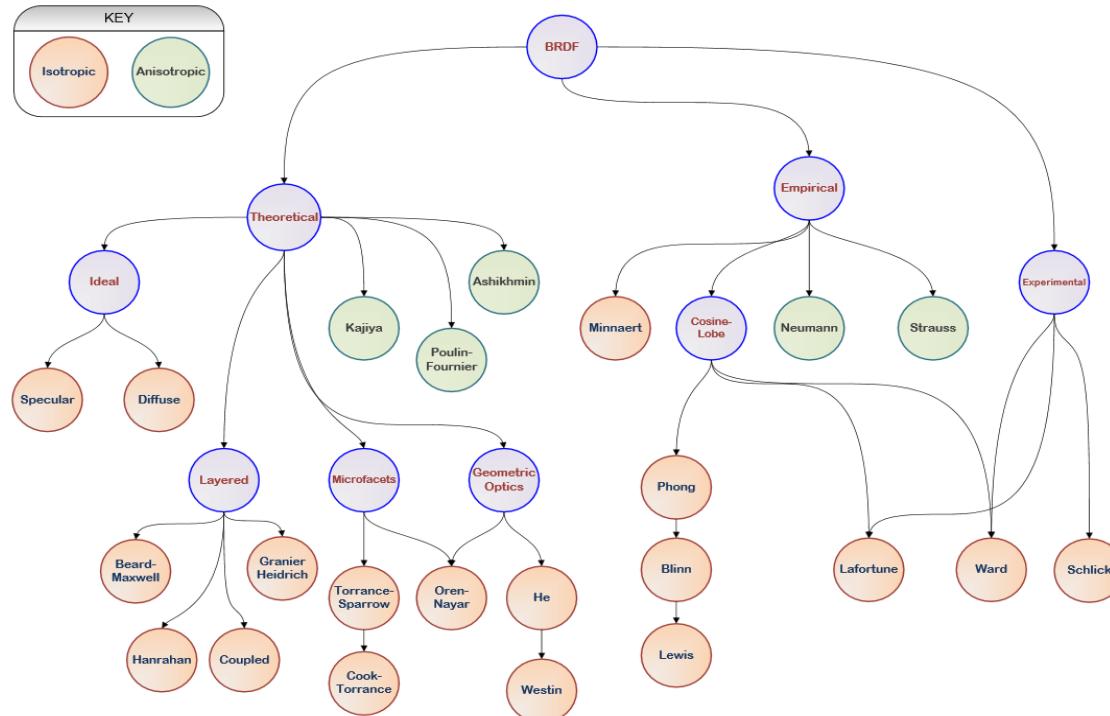

Rosana Montes, Carlos Ureña. An Overview of BRDF Models.

# Scattering Models - Timeline

---

- Minnaert (1941)
- Torrance-Sparrow (1967)
- Phong (1975)
- Cook-Torrance (1981)
- Strauss (1990)
- Ward (1992)
- Hanrahan and Kreuger (1993)
- Blinn-Phong (1994)
- Oren-Nayar (1994)
- Phong physical (1994)
- Schlick (1994)
- Lafortune (1997)
- Shirley-Hu-Smits-Lafortune (1997)
- Neumann-Neumann-Kalos (1999)
- Neumann (1999)
- Ashikhmin-Shirley (2000)
- Kelemen-Kalos (2001)
- Beard-Maxwell (2002)
- Ward-Dür (2006)
- Kurt-Kalos-Krivanek (2010)
- Moroder-Dür (2010)
- ...

# Illumination Models

---

- DEMO

# Outline


---

- Surface appearance MPG 10
- Radiometry MPG 10.1
- Light sources MPG 10.6
- Surface reflectance models, BRDF MPG 10.2-10.5
- Shading MPG 10.7

# Shading

---

- Determining colors / shades of all patch points
  - Constant color
  - Interpolation of colors from vertices
  - Interpolation of normals from vertices

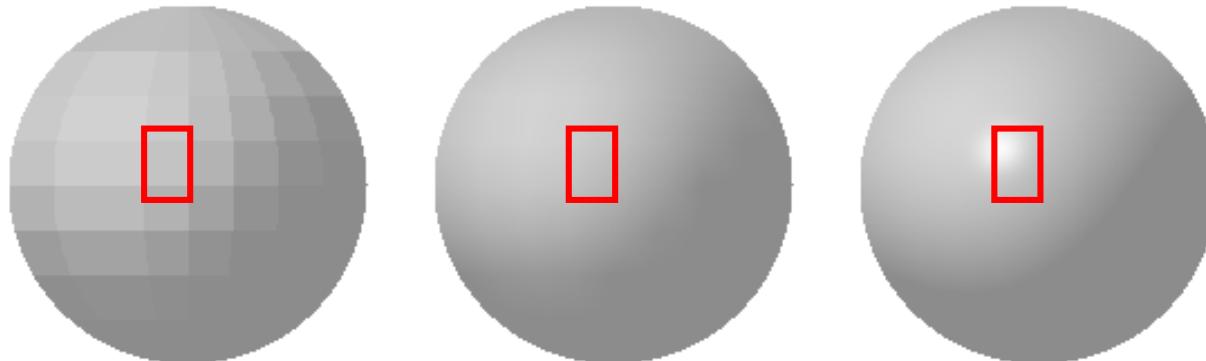


# Smooth Shading

---

- Gouraud interpolation of color
  - Good for diffuse surfaces
  - Illumination model computed apriori
  - Simple HW support
- Phong interpolation of normals
  - More realistic for glossy surfaces
  - Illumination model computed for all surface points
  - Slower

# Principle of Bilinear Interpolation

---

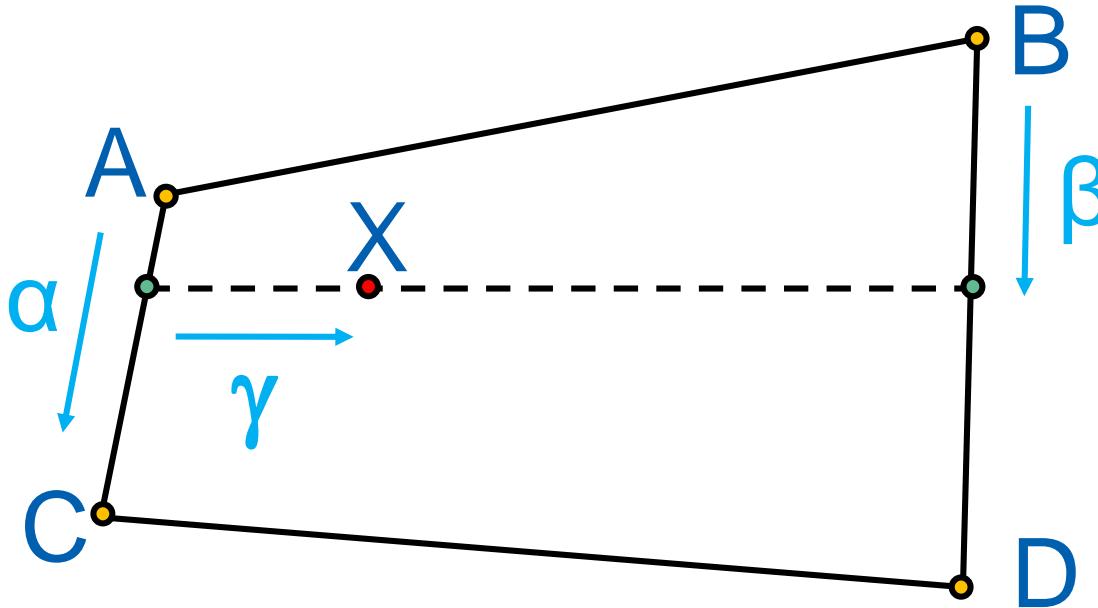


$$f_X = (1-\gamma) \cdot [(1-\alpha) \cdot f_A + \alpha \cdot f_C] + \\ \gamma \cdot [(1-\beta) \cdot f_B + \beta \cdot f_D]$$

# Computing Vertex Normals

---

- Analytically (from surface definition)
- From normals of neighboring faces:

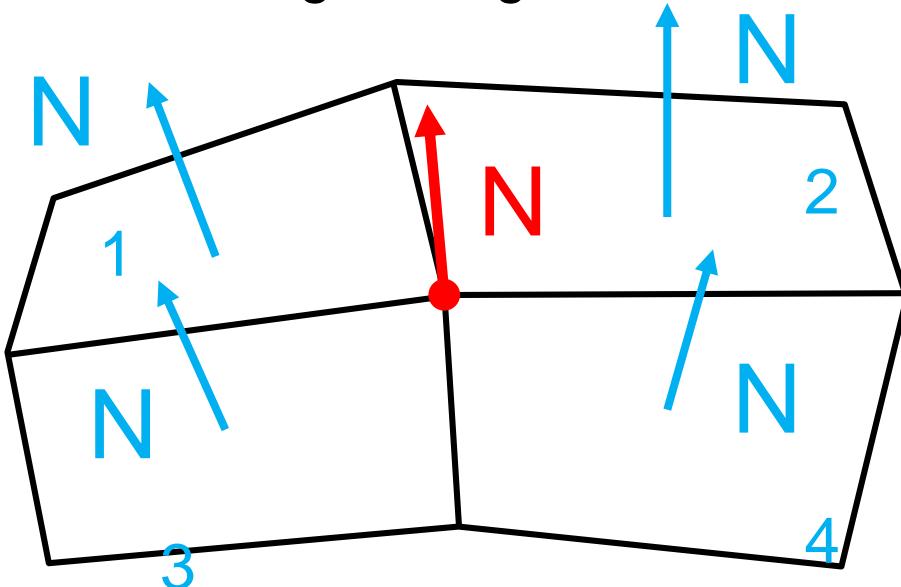


$$N = (N_1 + N_2 + N_3 + N_4) / 4$$

# Real and Auxiliary Edges



---

- a) Stored in model:

$$N_V = (N_2 + N_3)/2$$

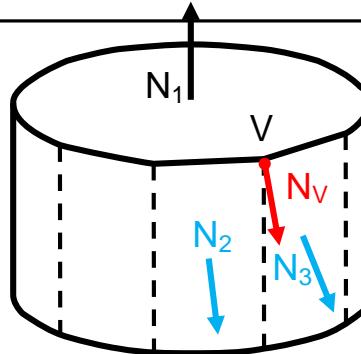



- b) Computed using crease angle

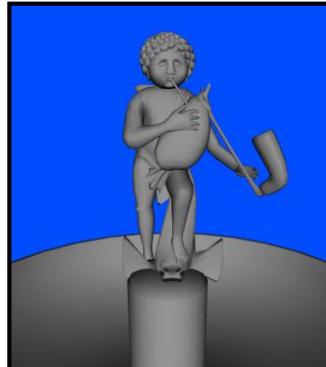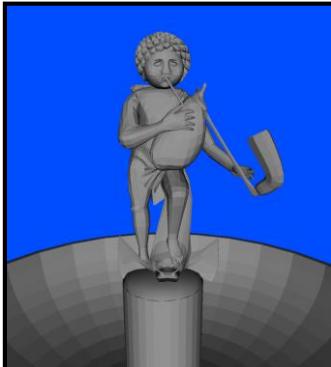


# Gouraud versus Phong Shading

---

- Gouraud does not capture maximal reflection
- Gouraud not invariant to rotation – temporal artifacts

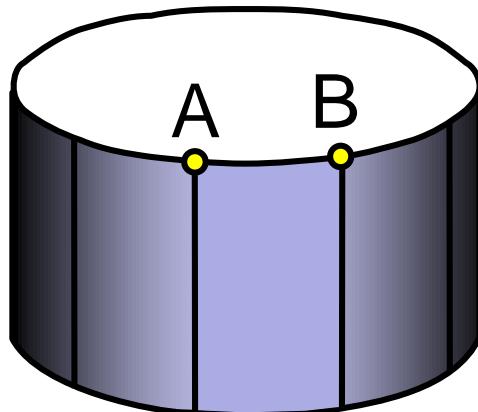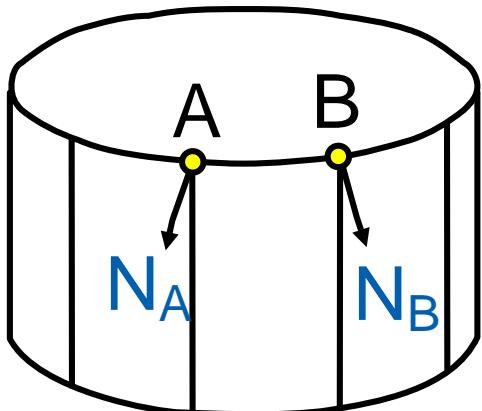

Gouraud

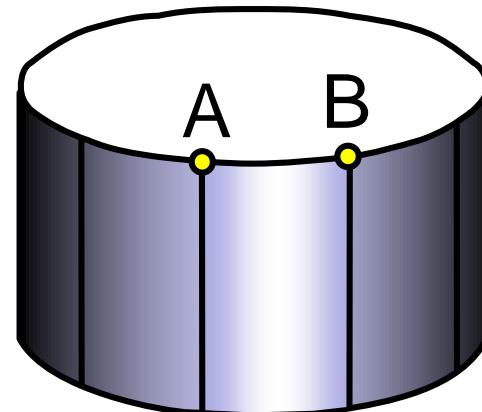


Phong

# Normal Interpolation

---


- Simplified interpolation
  - Linear interpolation by components
  - With normalization
  - Without normalization: neglecting error

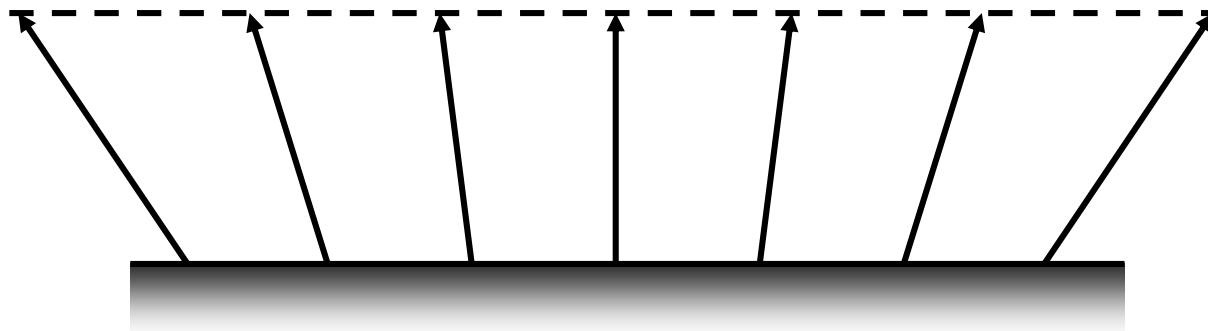

# Outline

---

- Surface appearance MPG 10
- Radiometry MPG 10.1
- Light sources MPG 10.6
- Surface reflectance models, BRDF MPG 10.2-10.5
- Shading MPG 10.7

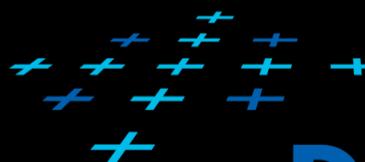

**DCGI**

KATEDRA POČÍTAČOVÉ GRAFIKY A INTERAKCE

Questions?