Path Planning

Jan Faigl

Department of Computer Science Faculty of Electrical Engineering Czech Technical University in Prague

Lecture 03

B4M36UIR - Artificial Intelligence in Robotics

Robot Motion Planning – Motivational problem

description suitable for controlling the actuators?

considering all operational constraints.

















Notation

 \mathbf{W} - World model describes the robot workspace and its boundary determines the obstacles \mathcal{O}_i .

A Robot is defined by its geometry, parameters (kinematics) and it is controllable by

the motion plan. ■ C - Configuration space (C-space)

A concept to describe possible configurations of the robot. The robot's configuration completely specify the robot location in ${\mathcal W}$ including specification of all degrees of

E.g., a robot with rigid body in a plane $C = \{x, y, \varphi\} = \mathbb{R}^2 \times S^1$.

■ Let \mathcal{A} be a subset of \mathcal{W} occupied by the robot, $\mathcal{A} = \mathcal{A}(q)$.

 \blacksquare A subset of $\mathcal C$ occupied by obstacles is

 $C_{obs} = \{q \in C : A(q) \cap O_i, \forall i\}.$

■ Collision-free configurations are

 $C_{free} = C \setminus C_{obs}$.

B4M36UIR - Lecture 03: Path Planning



Part 1 – Path and Motion Planning

Part I



Path (Motion) Planning / Trajectory Planning

robot and workspace

Tasks and Actions Plans

Path Planning

Sensing and Acting

Trajectory Generation

■ How to transform high-level task specification (provided by humans) into a low-level

To develop algorithms for such a transformation.

The motion planning algorithms provide transformations how to move a robot (object)

Piano Mover's Problem

■ D* Lite

Overview of the Lecture ■ Part 1 - Path Planning -

Introduction to Path Planning

■ Part 2 - Grid and Graph based Path Planning Methods

• Path Planning based on Reaction-Diffusion Process

Notation and Terminology

■ Path Planning Methods

Grid-based Planning

DT for Path Planning

Graph Search Algorithms

A classical motion planning problem

Having a CAD model of the piano, model of the environment, the problem is how to move the piano from one place to another without hitting anything.



Basic motion planning algorithms are focused primarily on rotations and translations

 We need notion of model representations and formal definition of the problem. Moreover, we also need a context about the problem and realistic assumptions.

The plans have to be admissible and feasible

Robotic Planning Context

Mission Plannina

Problem

Josef Štrunc Bachelor thesis CTU 2009

In a real deployment, the problem is more complex

■ The world is changing.

Real Mobile Robots

Robots update the knowledge about the environment.

localization, mapping and navigation

New decisions have to made based on the feedback from the environment. Motion planning is a part of the mission re-

planning loop.

An example of robotic mission:

Multi-robot exploration of unknown environment.

How to deal with real-world complexity?

Relaxing constraints and considering realistic assumptions.

B4M36UIR - Lecture 03: Path Planning



Path / Motion Planning Problem

Robot Control

■ Path is a continuous mapping in C-space such that

$$\pi: [0,1] o \mathcal{C}_{\mathit{free}}, \ \mathsf{with} \ \pi(0) = q_0, \ \mathsf{and} \ \pi(1) = q_f.$$

■ Trajectory is a path with explicate parametrization of time, e.g., accompanied by a description of the motion laws $(\gamma : [0,1] \to \mathcal{U}$, where \mathcal{U} is robot's action space).

$$[T_0,T_f]
ightarrow au\in [0,1]: q(t)=\pi(au)\in \mathcal{C}_{free}$$

The path planning is the determination of the function $\pi(\cdot)$.

Additional requirements can be given:

- Smoothness of the path;
- Kinodynamic constraints, e.g., considering friction forces;
- Optimality criterion shortest vs fastest (length vs curvature).
- Path planning planning a collision-free path in C-space.
- Motion planning planning collision-free motion in the state space.

B4M36UIR - Lecture 03: Path Planning



Planning in C-space Example of C_{obs} for a Robot with Rotation Representation of C-space Robot motion planning robot for a disk robot with a radius ρ . Pobot body How to deal with continuous representation of C-space? Continuous Representation of C-space Discretization processing critical geometric events, (random) sampling roadmaps, cell decomposition, potential field **Graph Search Techniques** Point robot BFS. Gradient Search. A* A simple 2D obstacle \rightarrow has a complicated C_{obs} Motion planning problem in geometrical Motion planning problem in C-space representation representation of W Deterministic algorithms exist. \mathcal{C} -space has been obtained by enlarging obstacles by the disk \mathcal{A} with the radius ρ . Requires exponential time in C dimension, J. Canny, PAMI, 8(2):200-209, 1986. By applying Minkowski sum: $\mathcal{O} \oplus \mathcal{A} = \{x + y \mid x \in \mathcal{O}, y \in \mathcal{A}\}$ Explicit representation of C_{free} is impractical to compute. B4M36UIR - Lecture 03: Path Planning B4M36UIR - Lecture 03: Path Planning Visibility Graph

I. Compute visibility graph Planning Methods - Overview Minimal Construct: Efficent Shortest Path in Polygonal Maps (selected approaches) ■ Minimal Construct algorithm computes visibility graph during the A* search instead of first computation of the 2. Find the shortest path E.g., by Dijkstra's algorithm. complete visibility graph and then finding the shortest path using A* or Dijkstra algorithm. ■ Point-to-point path/motion planning. Multi-goal path/motion/trajectory planning later Based on A* search with line intersection tests are delayed until ■ Roadmap based methods — Create a connectivity graph of the free space. they become necessary. ■ Visibility graph ■ The intersection tests are further accelerated using bounding (complete but impractical) Cell decomposition ■ Voronoi graph

Visibility graph

- Discretization into a grid-based (or lattice-based) representation (resolution complete)
- Potential field methods (complete only for a "navigation function", which is hard to compute in general)

Classic path planning algorithms

- Randomized sampling-based methods
 - \blacksquare Creates a roadmap from connected random samples in \mathcal{C}_{free}
 - Probabilistic roadmaps. Very successful in practice.

Samples are drawn from some distribution.







■ Using rotation trees for a set of segments – $O(n^2)$. 16 / 118 Path Planning Methods

 Naïve − all segments between n vertices of the map O(n³); M. H. Overmars and E. Welzl, 1988 B4M36UIR - Lecture 03: Path Planning



Found shortest path



Voronoi Graph

- 1. Roadmap is Voronoi graph that maximizes clearance from the obstacles.
- 2. Start and goal positions are connected to the graph.
- 3. Path is found using a graph search algorithm










Found path



Visibility graph

of the path.

Problem

Constructions of the visibility graph:

Visibility Graph vs Voronoi Graph

■ Complicated in higher dimensions

■ Complicated in higher dimensions.


A combination is called Visibility-Voronoi - R. Wein, J. P. van den Berg, D. Halperin. 2004.

■ Shortest path, but it is close to obstacles. We have to consider safety


For higher dimensions we need other types of roadmaps.




Path Planning Methods







Other decomposition (e.g., triangulation) are possible.



B4M36UIR - Lecture 03: Path Planning

An error in plan execution can lead to a

B4M36UIR - Lecture 03: Path Planning

B4M36UIR - Lecture 03: Path Planning

Any two points in a convex region can be directly connected by a

Approximate Shortest Path and Navigation Mesh

■ We can use any convex partitioning of the polygonal map to speed up shortest path queries.

1. Precompute all shortest paths from map vertices to p_g using visibility graph. 2. Then, an estimation of the shortest path from p to p_g is the shortest path among the one

Shortest Path Map (SPM)


- \blacksquare Speedup computation of the shortest path towards a particular goal location p_g for a polygonal domain \mathcal{P} with n vertices.
- A partitioning of the free space into cells with respect to the particular location p_g
- Each cell has a vertex on the shortest path to p_g .
- Shortest path from any point *p* is found by determining the cell (in $O(\log n)$ using point location alg.) and then travesing the shortest path with up to k bends, i.e., it is found in $O(\log n + k)$.
- Determining the SPM using "wavefront" propagation based on continuous Dijkstra paradigm.
 - Joseph S. B. Mitchell: A new algorithm for sho
- SPM is a precompute structure for the given \mathcal{P} and p_g ;
 - single-point query.

B4M36UIR - Lecture 03: Path Planning

Point Location Problem

Navigation Mesh

■ For a given partitioning of the polygonal domain into a discrete set of cells, determine the cell for a given point p.





■ In addition to robotic approaches, fast shortest path queries are studied in computer games.



ACM Trans. Graph., 3(2):86-109, 1984

■ It can be implemented using interval trees - slabs and slices



There is a class of algorithms based on navigation mesh.

A supporting structure representing the free space.



B4M36UIR - Lecture 03: Path Planning

It usually originated from the grid based maps, but it is represented as CDT - Constrained





triangulation (convex partitioning).

Artificial Potential Field Method


configuration of the robot.

of the cell vertex.

■ The estimation can be further improved by "ray-shooting" technique combined with walking in (Faigl, 2010)

Path Refinement

- Testing collision of the point p with particular vertices of the estimation of the shortest path.
 - Let the initial path estimation from p to p_g be a sequence of k vertices $(p, v_1, \dots, v_k, p_g)$.
 - We can iteratively test if the segment (p, v_i) , $1 < i \le k$ is collision free up to (p, p_g)







■ E.g., Polyanya algorithm based on navigation mesh and best-first search.

M. Cui, D. Harabor, A. Grastien: Compromise-free Pathfinding on a Navigation Mesh, IJCAI 2017, 496-502.








■ Such a function is called navigation function and $-\nabla f(q)$ points to the goal. \blacksquare Create a potential field that will attract robot towards the goal q_f while obstacles will generate repulsive potential repelling the robot away from the obstacles.

■ The idea is to create a function f that will provide a direction towards the goal for any



The navigation function is a sum of potentials.

Avoiding Local Minima in Artificial Potential Field

Consider harmonic functions that have only one extremum

$$\nabla^2 f(q) = 0.$$

Finite element method with defined Dirichlet and Neumann boundary conditions.



Part II


Part 2 - Grid and Graph based Path Planning Methods

Grid-based Planning

- A subdivision of C_{free} into smaller cells.
- Grow obstacles can be simplified by growing borders by a diameter of the robot.
- Construction of the planning graph G = (V, E) for V as a set of cells and E as the neighbor-relations.




A grid map can be constructed from the so-called occupancy grid maps. E.g., using thresholding.











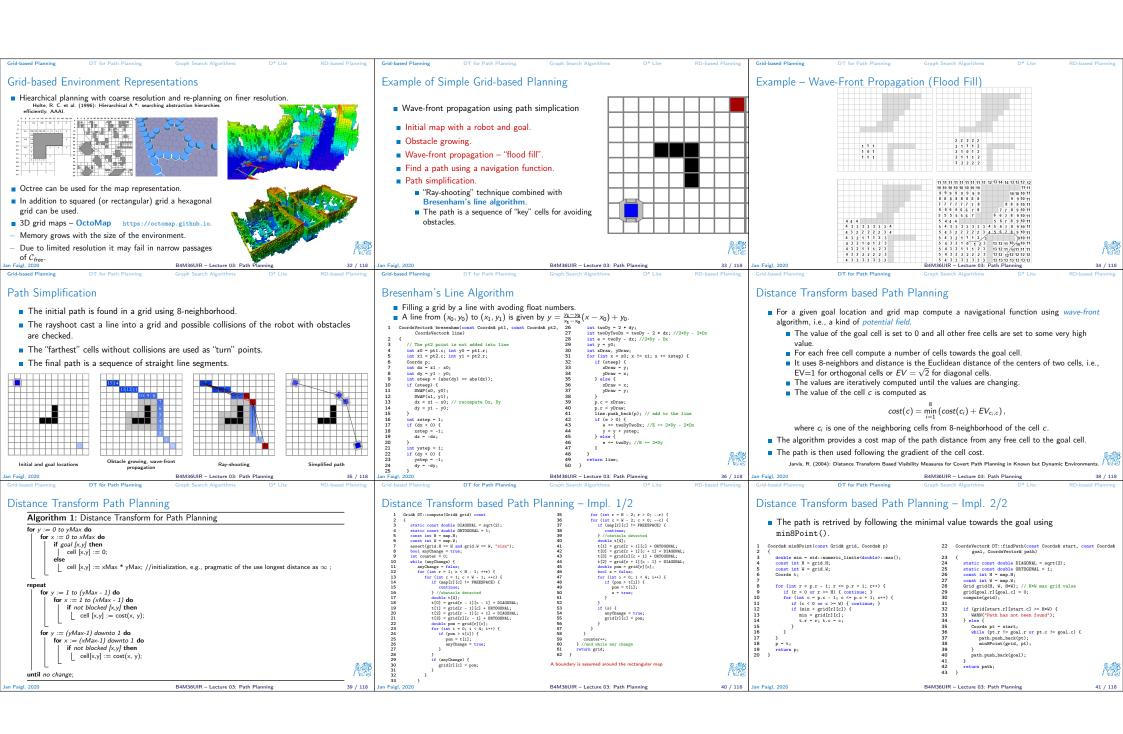

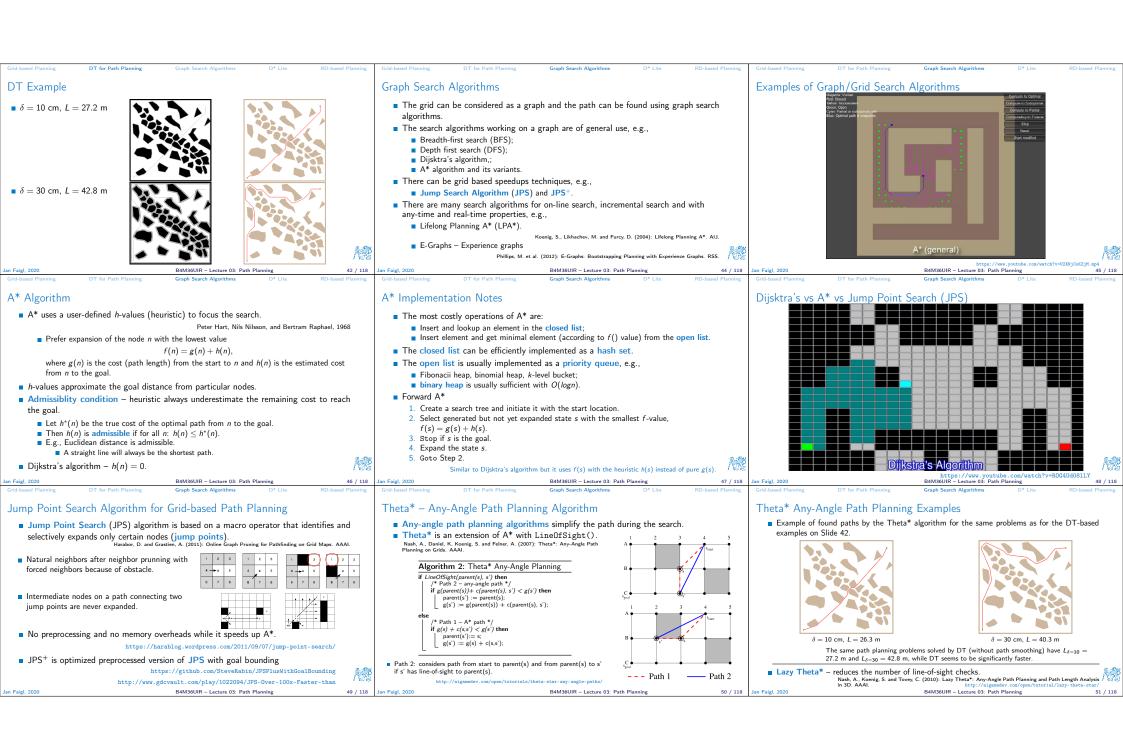

A* Variants - Online Search Real-Time Adaptive A* (RTAA*) D* Lite - Demo ■ The state space (map) may not be known exactly in advance. Environment can dynamically change. ■ True travel costs are experienced during the path execution. ■ Execute A* with limited look-ahead. while $(s_{curr} \notin GOAL)$ do ■ Repeated A* searches can be computationally demanding. Learns better informed heuristic from astar(lookahead); ■ Incremental heuristic search the experience, initially h(s), e.g., Euif s' = FAILURE then Repeated planning of the path from the current state to the goal. return FAILURE; clidean distance. ■ Planning under the free-space assumption. for all $s \in CLOSED$ do Reuse information from the previous searches (closed list entries). Look-ahead defines trade-off between ■ Focused Dynamic A* (D*) – h^* is based on traversability, it has been used, e.g., for the H(s) := g(s') + h(s') - g(s);optimality and computational cost. Mars rover "Opportunity" execute(plan); // perform one step astar(lookahead) Stentz, A. (1995): The Focussed D* Algorithm for Real-Time Replanning. IJCAI return SUCCESS: A* expansion as far as "lookahead" nodes ■ D* Lite - similar to D* and it terminates with the state s'. Koenig, S. and Likhachev, M. (2005): Fast Replanning for Navigation in Unknown Terrain, T-RO s' is the last state expanded during the previous A* ■ Real-Time Heuristic Search ■ Repeated planning with limited look-ahead – suboptimal but fast ■ Learning Real-Time A* (LRTA*) Korf, E. (1990): Real-time heuristic search. JAI. Real-Time Adaptive A* (RTAA*) Koenig, S. and Likhachev, M. (2006): Real-time adaptive A*. AAMAS. https://www.yo B4M36UIR - Lecture 03: Path Planning B4M36UIR - Lecture 03: Path Planning 53 / 118 D* Lite Overview D* Lite: Cost Estimates D* Lite Algorithm ■ It is similar to D*, but it is based on Lifelong Planning A*. ■ Main - repeat until the robot reaches the goal (or $g(s_{start}) = \infty$ there is no path). • rhs of the node u is computed based on g of its successors in the graph and the Koenig, S. and Likhachev, M. (2002): D* Lite. AAAI. Initialize(); transition costs of the edge to those successors Procedure Initialize ■ It searches from the goal node to the start node, i.e., g-values estimate the goal distance. ComputeShortestPath(); foreach $s \in S$ do $\mathit{rhs}(u) = \left\{ \begin{array}{ll} 0 & \text{if } u = s_{\mathit{start}} \\ \min_{s' \in Succ(u)}(g(s') + c(s', u)) & \text{otherwise} \end{array} \right.$ while $(s_{start} \neq s_{goal})$ do ■ Store pending nodes in a priority queue. $rhs(s) := g(s) := \infty$ $s_{start} = \operatorname{argmin}_{s' \in Succ(s_{start})} (c(s_{start}, s') + g(s'));$ $rhs(s_{goal}) := 0;$ U.Insert(s_{goal} , CalculateKey(s_{goal})); Process nodes in order of increasing objective function value. Move to s_{start}; Scan the graph for changed edge costs; Incrementally repair solution paths when changes occur. ■ The key/priority of a node s on the open list is the minimum of g(s) and rhs(s) plus a if any edge cost changed perform then ■ Maintains two estimates of costs per node: focusing heuristic h foreach directed edges (u, v) with changed edge costs ■ g - the objective function value - based on what we know; $[\min(g(s), rhs(s)) + h(s_{start}, s); \min(g(s), rhs(s))].$ Update the edge cost c(u, v); ■ rhs - one-step lookahead of the objective function value - based on what we know. UpdateVertex(u): Consistency: foreach $s \in U$ do ■ Consistent – g = rhs; U.Update(s, CalculateKey(s)); ■ The first term is used as the primary key. Inconsistent − g ≠ rhs. ■ The second term is used as the secondary key for tie-breaking. ComputeShortestPath(); Inconsistent nodes are stored in the priority queue (open list) for processing. U is priority queue with the vertices. 57 / 118 D* Lite Algorithm - ComputeShortestPath() D* Lite - Demo D* Lite - Example Procedure ComputeShortestPath Legend Free node Obstacle node $\label{eq:while U.TopKey() < CalculateKey(s_start) OR rhs(s_start) \neq g(s_{start}) \ \ do \\ u := U.Pop(); \\ if \ g(u) > rhs(u) \ \ then$ On open list g(u) := rhs(u);foreach $s \in Pred(u)$ do UpdateVertex(s); A grid map of the environment (what is actually known). 8-connected graph superimposed on the grid (bidirectional). foreach $s \in Pred(u) \bigcup \{u\}$ do UpdateVertex(s); Focusing heuristic is not used Procedure UpdateVertex $\text{if } u \neq s_{goal} \text{ then } rhs(u) := \min_{s' \in Succ(u)} (c(u,s') + g(s')); \\$ if $u \in U$ then U Remove(u): if $g(u) \neq rhs(u)$ then U.Insert(u, CalculateKey(u)); Procedure CalculateKey Transition costs return $[min(g(s), rhs(s)) + h(s_{start}, s); min(g(s), rhs(s))]$ ■ Free space - Free space: 1.0 and 1.4 (for diagonal edge). ■ From/to obstacle: ∞ B4M36UIR - Lecture 03: Path Planning

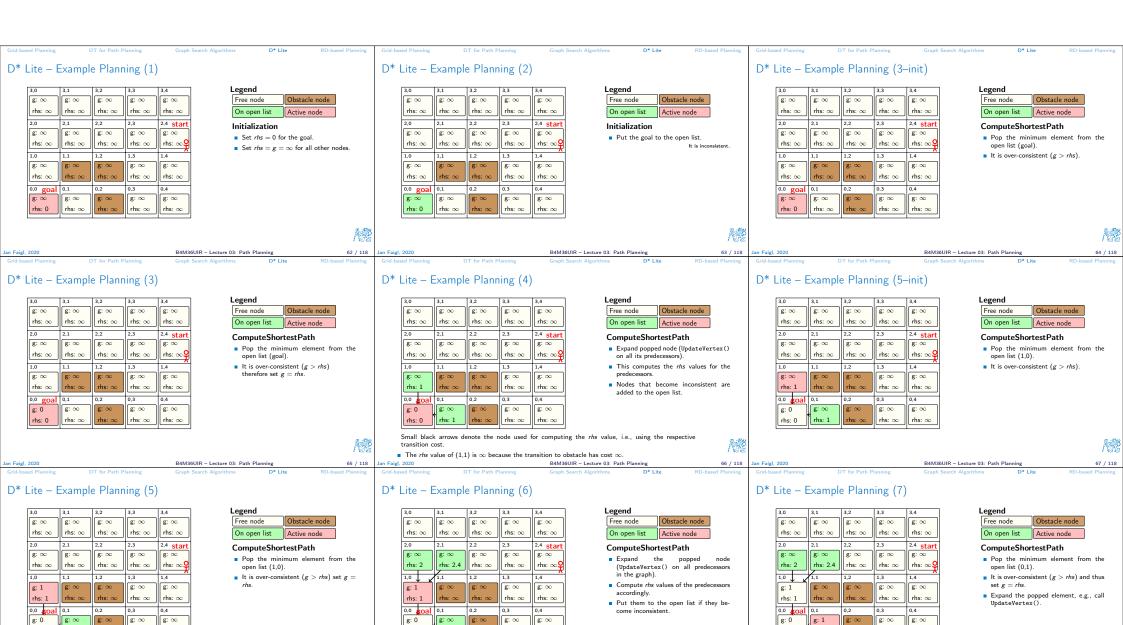

rhs: 1

rhs: 0

rhs: 1

B4M36UIR - Lecture 03: Path Planning

rhs: ∞

■ They do not become inconsistent and thus they are not put on the open list.

B4M36UIR - Lecture 03: Path Planning

rhs: ∞ ■ The rhs value of (0,0), (1,1) does not change rhs: 1

69 / 118


rhs: ∞


B4M36UIR - Lecture 03: Path Planning



M

 Jan Faigl, 2020
 B4M36UIR – Lecture 03: Path Planning
 77 / 118
 Jan Faigl, 2020
 B4M36UIR – Lecture 03: Path Planning
 78 / 118
 Jan Faigl, 2020
 B4M36UIR – Lecture 03: Path Planning
 79 / 12

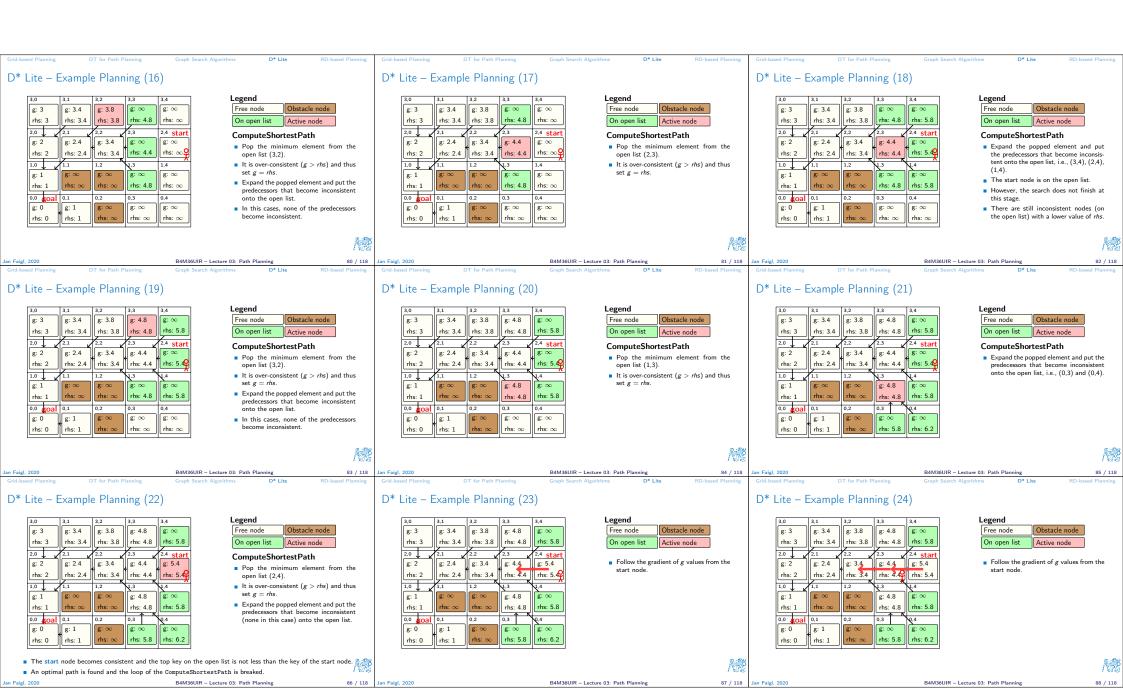


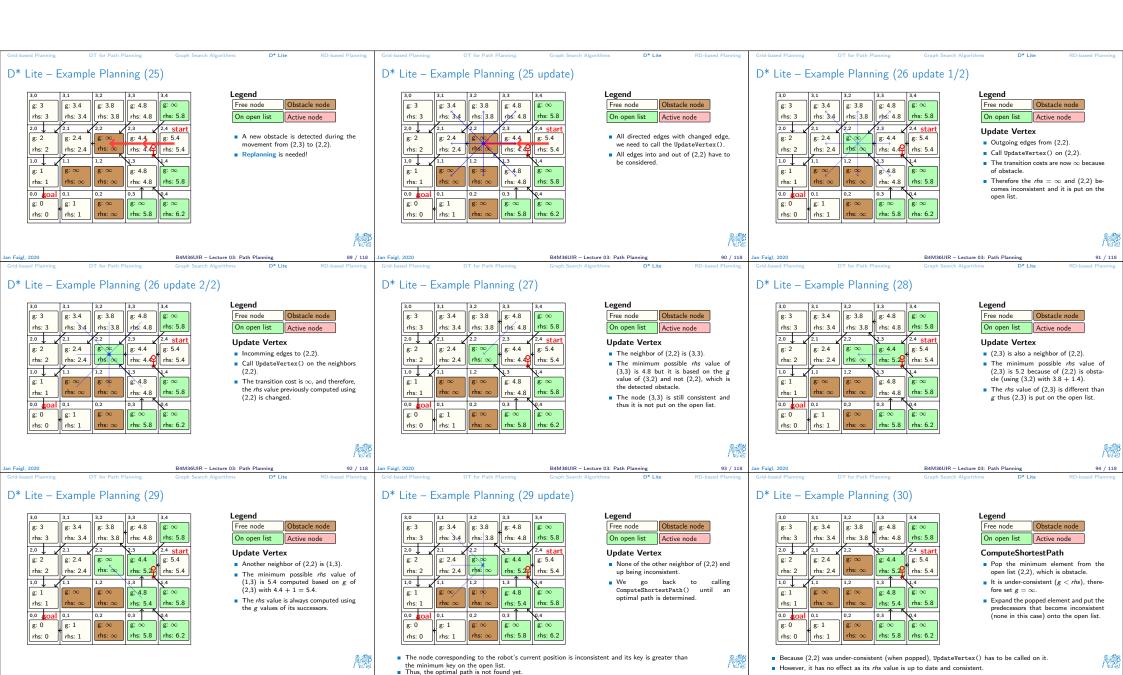

B4M36UIR - Lecture 03: Path Planning

B4M36UIR - Lecture 03: Path Planning

However, it has no effect as its rhs value is up to date and consistent.

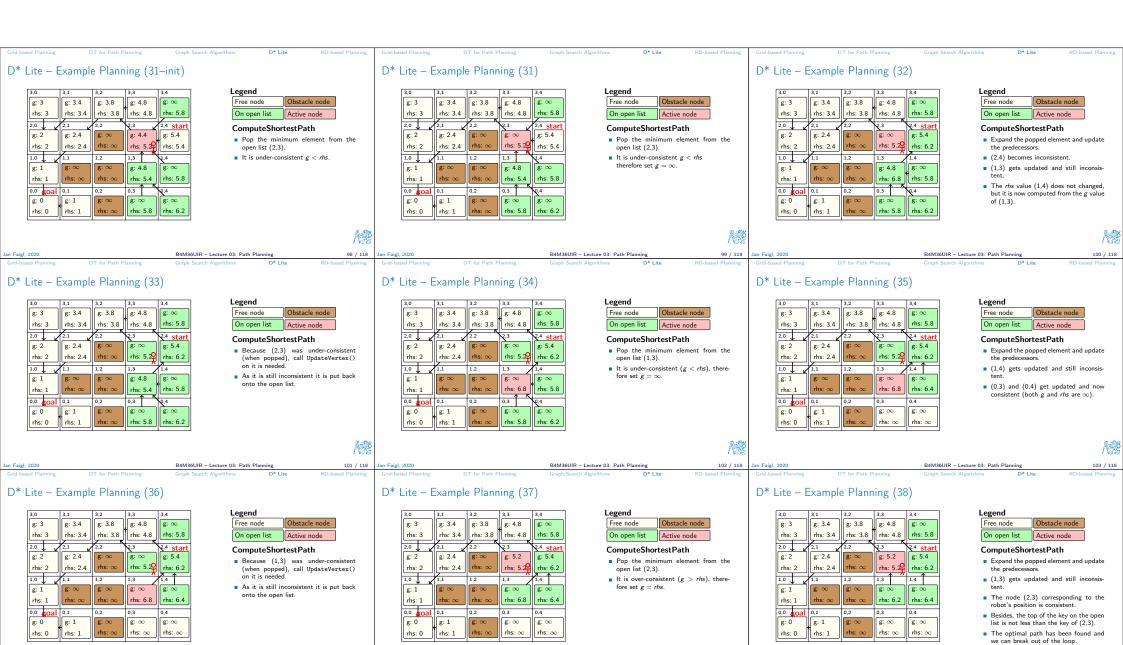

B4M36UIR - Lecture 03: Path Planning


105 / 118

B4M36UIR - Lecture 03: Path Planning

B4M36UIR - Lecture 03: Path Planning

104 / 118

D* Lite - Example Planning (39)



Legend

Free node	Obstacle node
On open list	Active node

Follow the gradient of g values from the robot's current position (node).

D* Lite - Comments

- D* Lite works with real valued costs, not only with binary costs (free/obstacle).
- The search can be focused with an admissible heuristic that would be added to the g
- The final version of D* Lite includes further optimization (not shown in the example).
 - Updating the rhs value without considering all successors every time.
 - Re-focusing the search as the robot moves without reordering the entire open list.

Reaction-Diffusion Processes Background

- Reaction-Diffusion (RD) models dynamical systems capable to reproduce the au-
- Autowaves a class of nonlinear waves that propagate through an active media. At the expense of the energy stored in the medium, e.g., grass combustion.
- **RD** model describes spatio-temporal evolution of two state variables $u = u(\vec{x}, t)$ and $v = v(\vec{x}, t)$ in space \vec{x} and time t

$$\dot{u} = f(u, v) + D_u \triangle u
\dot{v} = g(u, v) + D_v \triangle v$$

where \triangle is the Laplacian.

This RD-based path planning is informative, just for curiosity.

107 / 118

111 / 118

108 / 118

conditions (FTCS).

1. Propagation phase

2. Contraction phase

 $discretization \rightarrow grid\ based\ computation \rightarrow grid\ map$

Vázquez-Otero and Muñuzuri, CNNA (2010)

i.e., constraining concentration levels to some specific values.

Reaction-Diffusion Background

FitzHugh-Nagumo (FHN) model

FitzHugh R, Biophysical Journal (1961)

$$\dot{u} = \varepsilon \left(u - u^3 - v + \phi \right) + D_u \triangle u$$

$$\dot{v} = \left(u - \alpha v + \beta \right) + D_v \triangle u$$

where α, β, ϵ , and ϕ are parameters of the model.


■ Dynamics of RD system is determined by the associated nullcline configurations for \dot{u} =0 and $\dot{v}=0$ in the absence of diffusion, i.e.,

$$\varepsilon (u - u^3 - v + \phi) = 0,$$

$$(u - \alpha v + \beta) = 0,$$

which have associated geometrical shapes.

Nullcline Configurations and Steady States




- Nullclines intersections represent:
- Stable States (SSs);
- Unstable States.
- Bistable regime

The system (concentration levels of (u, v) for each grid cell)



"preference" of SS+ over SS-

- \blacksquare System moves from SS^- to SS^+ , if a small perturbation is intro-
- The SSs are separated by a mobile frontier a kind of traveling frontwave (autowaves).





■ SS⁻ shrinks until only the path linking the forced points remains

RD-based Path Planning - Computational Model

■ Freespace is set to SS⁻ and the start location SS⁺

■ Terminate when the frontwave reaches the goal.

Start and goal positions are forced towards SS+

Parallel propagation of the frontwave with non-annihilation property.


■ External forcing — introducing additional information

■ Two-phase evolution of the underlying RD model.

■ Different nullclines configuration.


Finite difference method on a Cartesian grid with Dirichlet boundary

Example of Found Paths

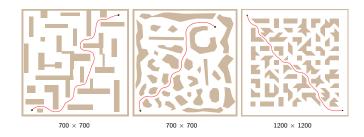

■ The path clearance maybe adjusted by the wavelength and size of the computational grid. Control of the path distance from the obstacles (path safety).

Comparison with Standard Approaches



RD-based approach provides competitive paths regarding path length and clearance, while they seem to be smooth.

Robustness to Noisy Data





Vázquez-Otero, A., Faigl, J., Duro, N. and Dormido, R. (2014): Reaction-Diffusion based Computational Model for Autonomous Mobil-





B4M36UIR - Lecture 03: Path Planning B4M36UIR - Lecture 03: Path Planning

Summary of the Lecture

Topics Discussed

- Motion and path planning problems
 Path planning methods overview
 Notation of configuration space
- Path planning methods for geometrical map representation
 - Shortest-Path Roadmaps
 - Voronoi diagram based planning
 - Cell decomposition method
- Distance transform can be utilized for kind of navigational function
 Front-Wave propagation and path simplification
 Artificial potential field method
- Graph search (planning) methods for grid-like representation
 Dijsktra's, A*, JPS, Theta*
- Dedicated speed up techniques can be employed to decreasing computational burden, e.g., JPS
 Grid-path can be smoothed, e.g., using path simplification or Theta* like algorithms
- We can avoid demanding planning from scratch reusing the previous plan for the updated environment map, e.g., using D* Lite
- Unconventional reaction-diffusion based planning (informative)
- Next: Robotic Information Gathering Mobile Robot Exploration



B4M36UIR - Lecture 03: Path Planning

117 / 118

B4M36UIR - Lecture 03: Path Planning

118 / 118