

ROBOT KINEMATICS

Václav Hlaváč

Czech Technical University in Prague

Faculty of Electrical Engineering, Department of Cybernetics

Center for Machine Perception

<http://cmp.felk.cvut.cz/~hlavac>, hlavac@fel.cvut.cz

Outline of the talk:

1. Kinematics, what is?
2. Open, closed kinematic mechanisms.
3. Sequence of joint transformations (matrix multiplications).
4. Direct vs. inverse kinematic task.

Initial comments

- ◆ We will refer here to a robot as a proxy for a mechanical device, its position, stiffness or dynamics is of interest.
- ◆ The terms and laws studied here can be applied to an industrial manipulator, any other robot, and any other mechanism with moving components.

Mechanics and its parts

Kinematics analyzes the **geometry of a motion** analytically, e.g. of a robot,

- ◆ with respect to a fixed reference co-ordinate system,
- ◆ without regard to the forces or moments that cause the motion.
- ◆ Essential concepts are position and orientation.

Statics deals with forces and moments which are applied on the mechanism which is not moving. The essential concept are the **stiffness** and the **stress**.


Dynamics analyzes **forces** and **moments** which result from motion and acceleration of a mechanism and a load.

Need of kinematics in robotics

- ◆ Knowing the kinematical description of a robot is a prerequisite of its control and programming.
- ◆ Kinematics provides knowledge of both robot's spatial arrangement and a means of reference to the environment.


Kinematics → dynamics, control

Kinematics is only the first step towards robot control !

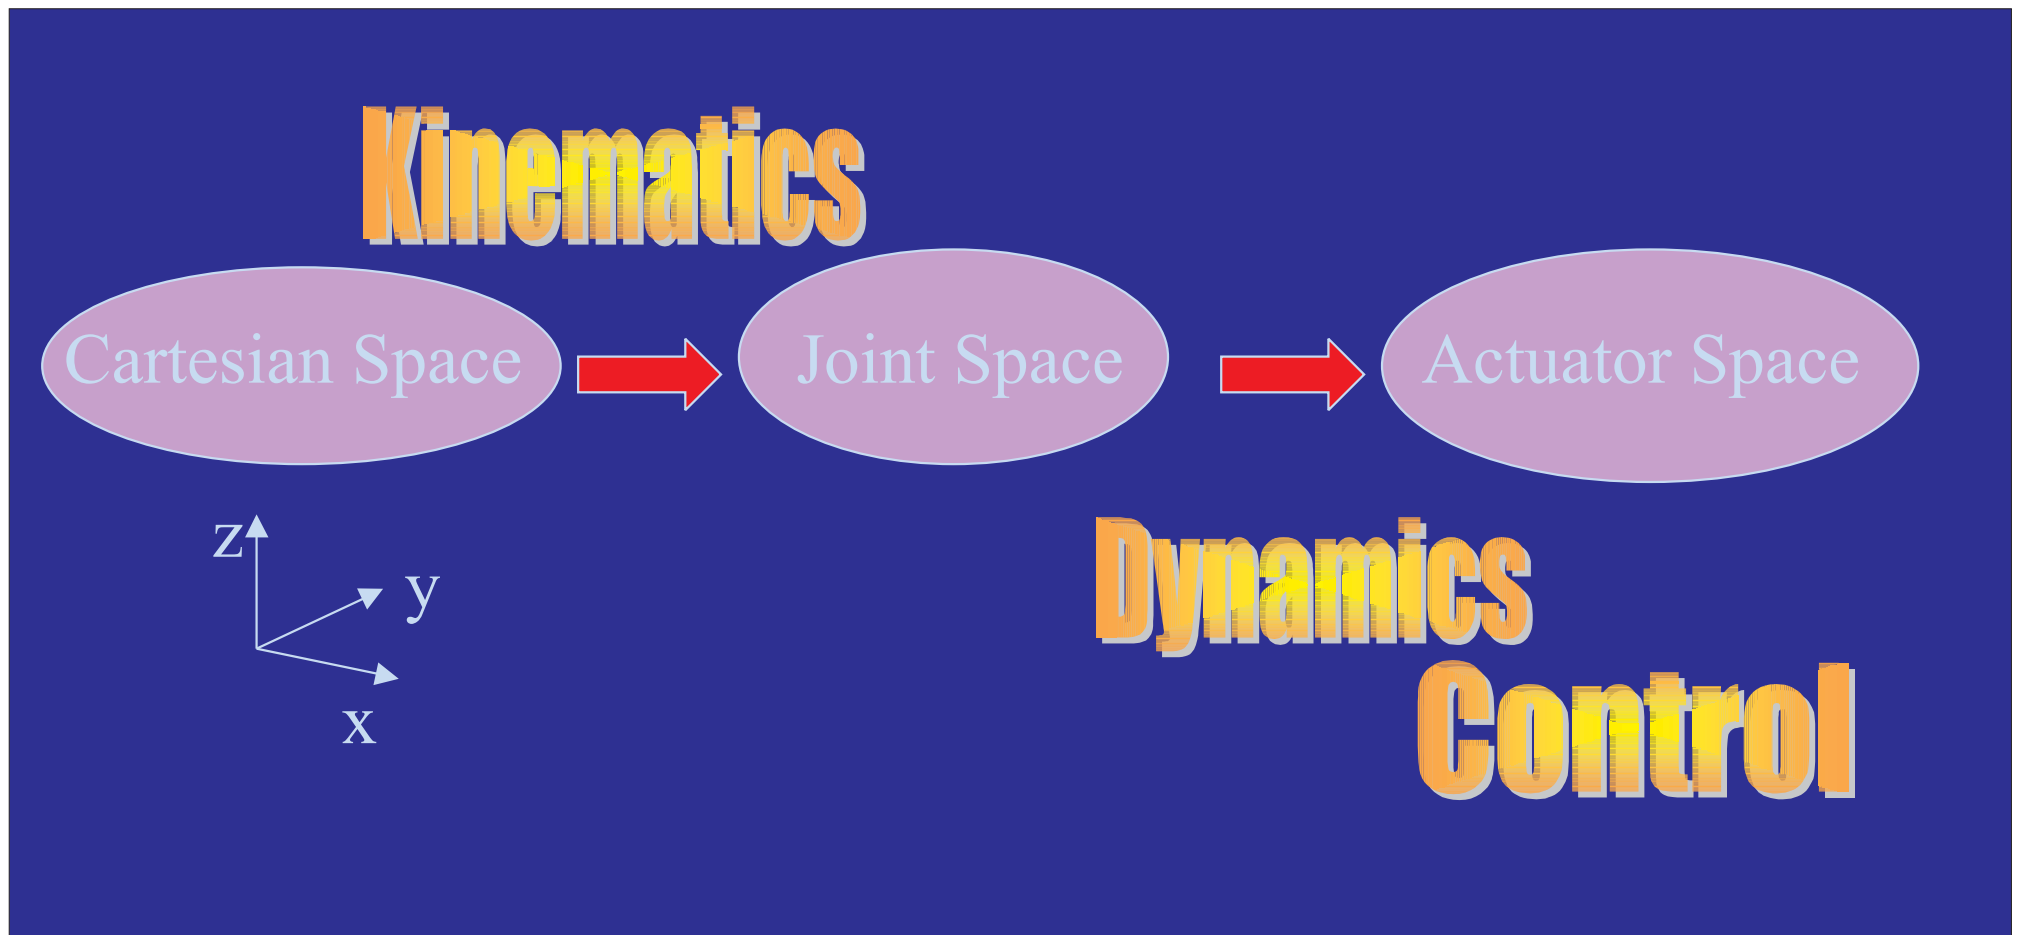


Kinematics – Terminology

- ◆ **Link** is the rigid part of the robot body (e.g. forearm).
- ◆ **Joint** is a part of the robot body which allows controlled or free relative motion of two links (connection element).
- ◆ **End effector** is the link of the manipulator which is used to hold the tools (gripper, spray gun, welding gun ...).
- ◆ **Base** is the link of the manipulator which is usually connected to the ground and is directly connected to the world coordinate system.
- ◆ **Kinematic pair** is a pair of links which relative motion is bounded by the joint connecting them (e.g. base and shoulder connected by J1 axis).

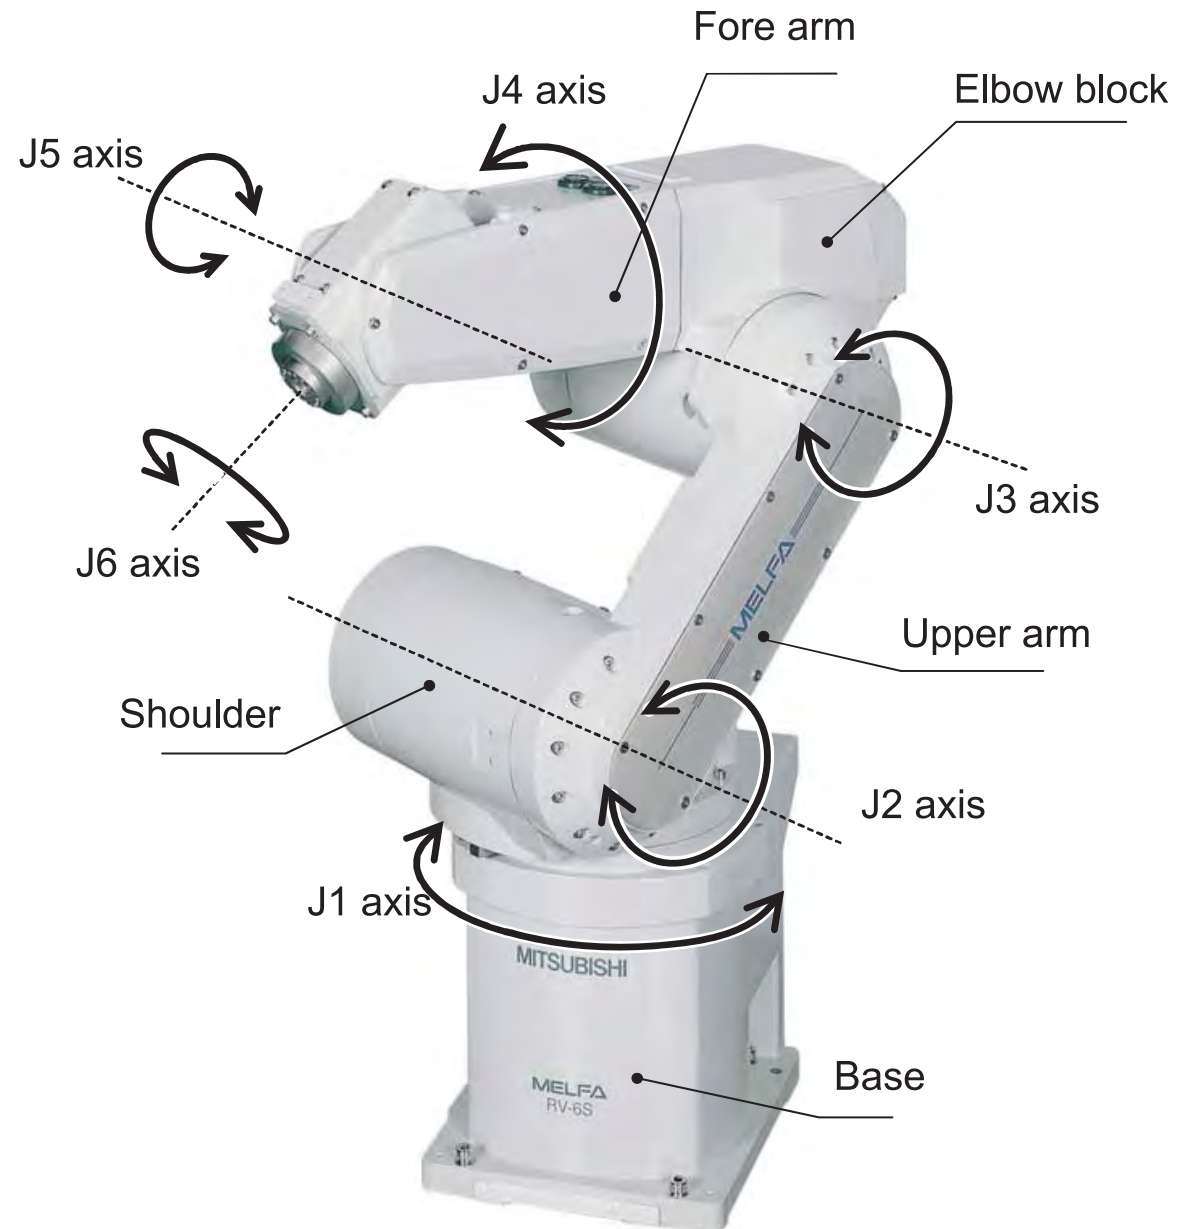

Open chain manipulator kinematics

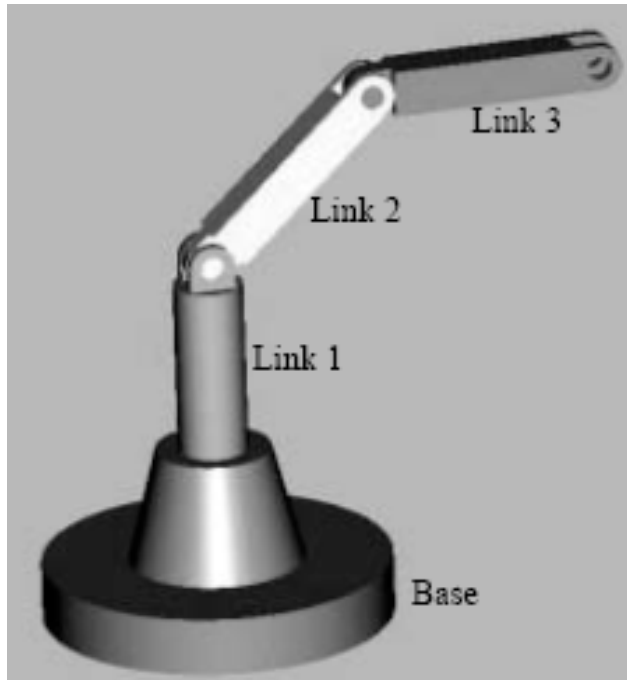

- ◆ Mechanics of a manipulator can be represented as a kinematic chain of rigid bodies (links) connected by revolute or prismatic joints.
- ◆ Kinematics can be represented by an acyclic graph (tree). Example: human hand.
- ◆ One end of the chain is constrained to a base, while an end effector is mounted to the other end of the chain.
- ◆ The resulting motion is obtained by **composition of the elementary motions** of each link with respect to the previous one.

Open chain manipulators, examples



Closed kinematic chain

- ◆ Much more difficult. Can be represented by a (general, cyclic) graph.
- ◆ Even analysis has to take into account statics, constraints from other links, etc.
- ◆ Synthesis of closed kinematic mechanisms is very difficult.
- ◆ Main advantage = **high stiffness**.



Closed kinematic chain examples



Hybrid chain



Parallel chain


Kinematics vs. differential kinematics

in a special case of an open kinematic chain mechanism, e.g. a robotic manipulator

- ◆ **Kinematics** describes the analytical relationship between the joint positions and the end-effector position and orientation.
- ◆ **Differential kinematics** describes the analytical relationship between the joint motion and the end-effector motion in terms of velocities.



Degrees of Freedom, a free rigid object

- ◆ Q: How many parameters (Degrees of Freedom, DoF) are needed to specify a flying rigid body?
A: **Six**, three coordinates of the position x, y, z , and three rotation angles.
- ◆ Example: Kinematics of the airplane allows it to move anywhere in the 3D space.

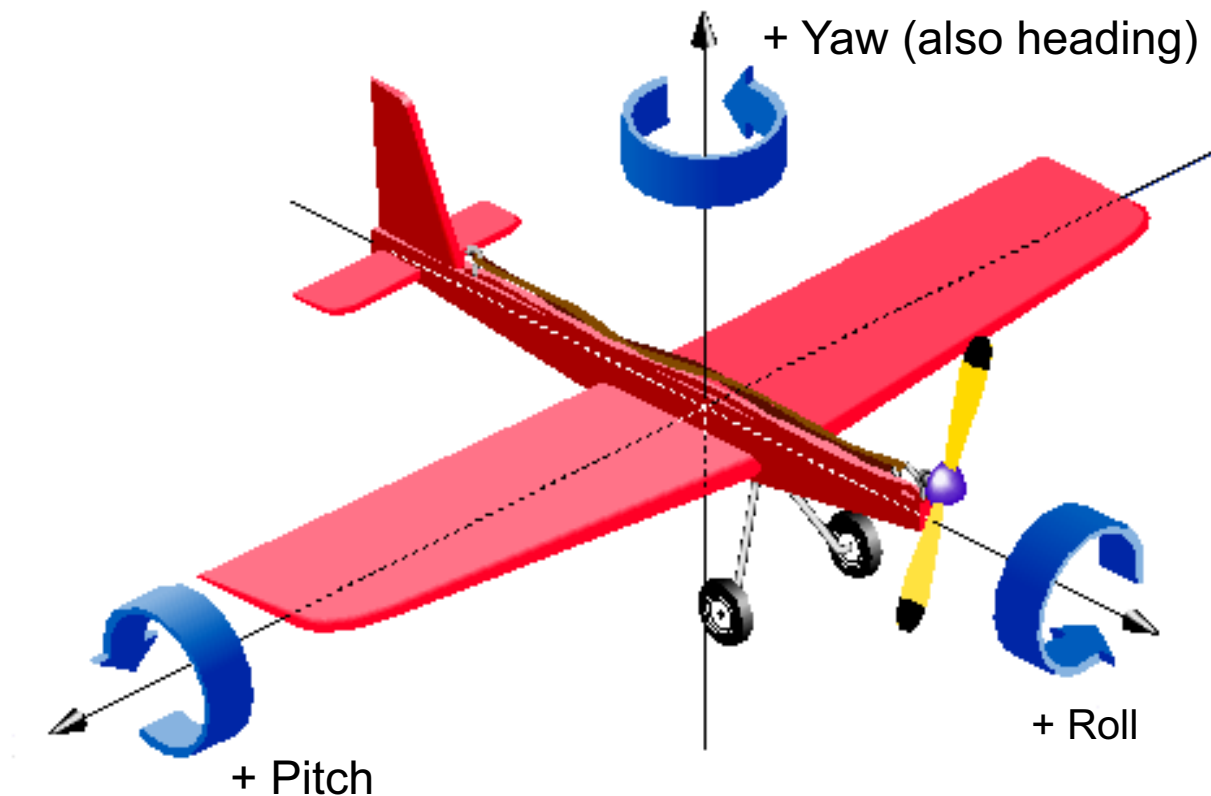

Degrees of freedom, example, question



- ◆ Q: How many degrees of freedom (DoF) has this manipulator?

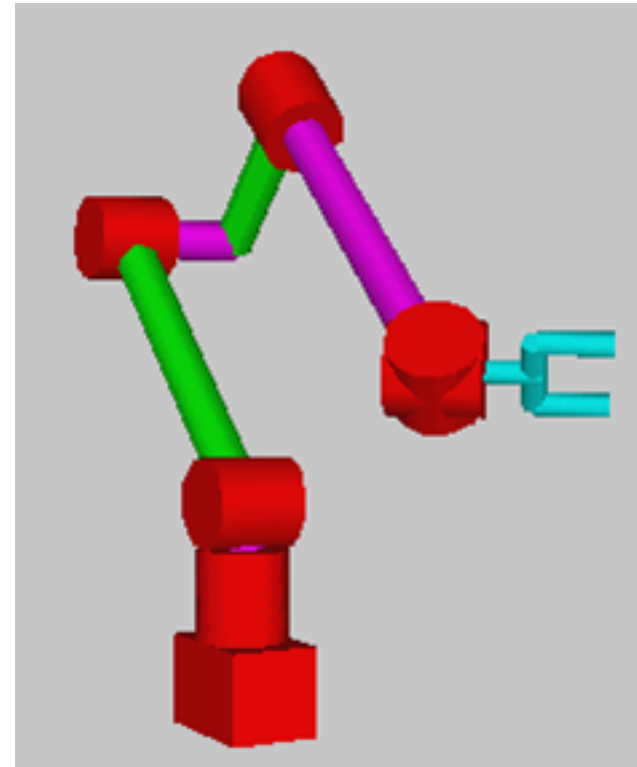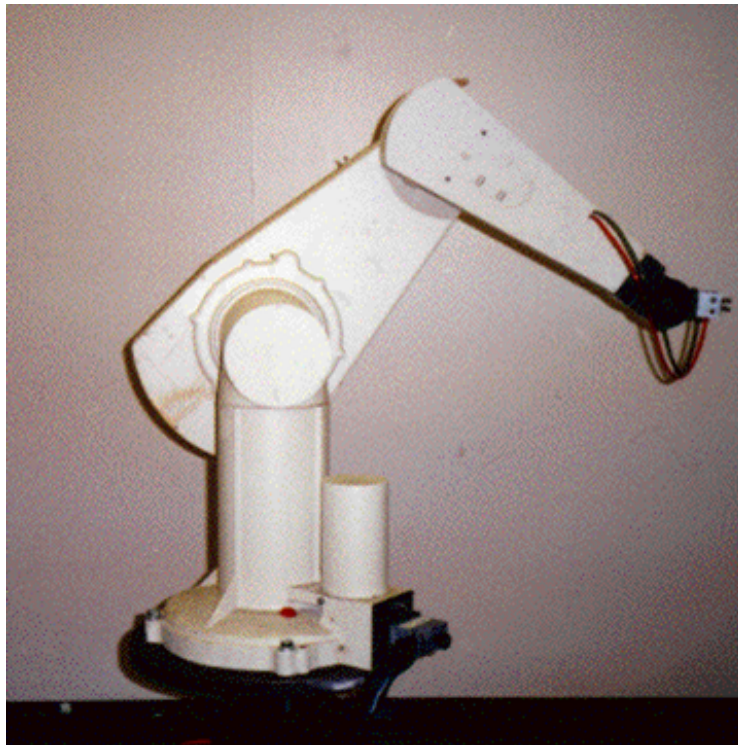

- ◆ A:

Degrees of freedom, example, answer


- ◆ Q: How many degrees of freedom (DoF) has this manipulator?

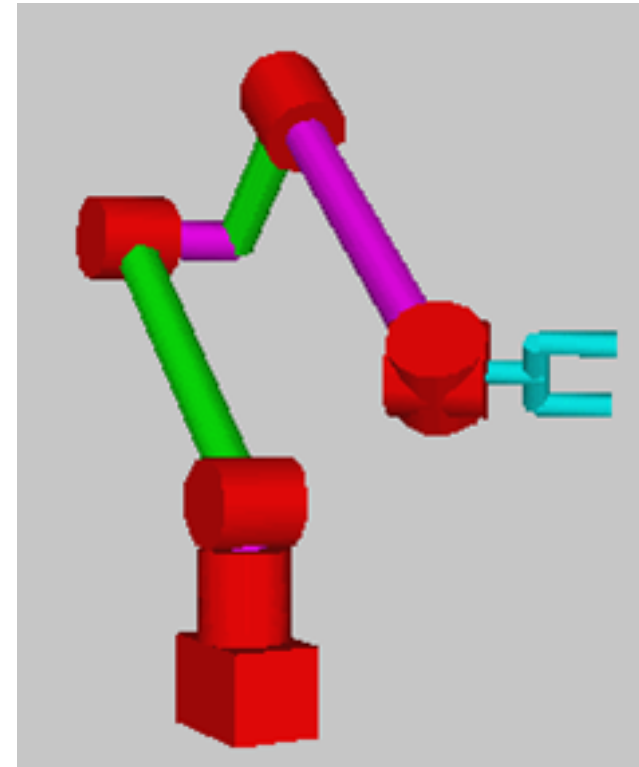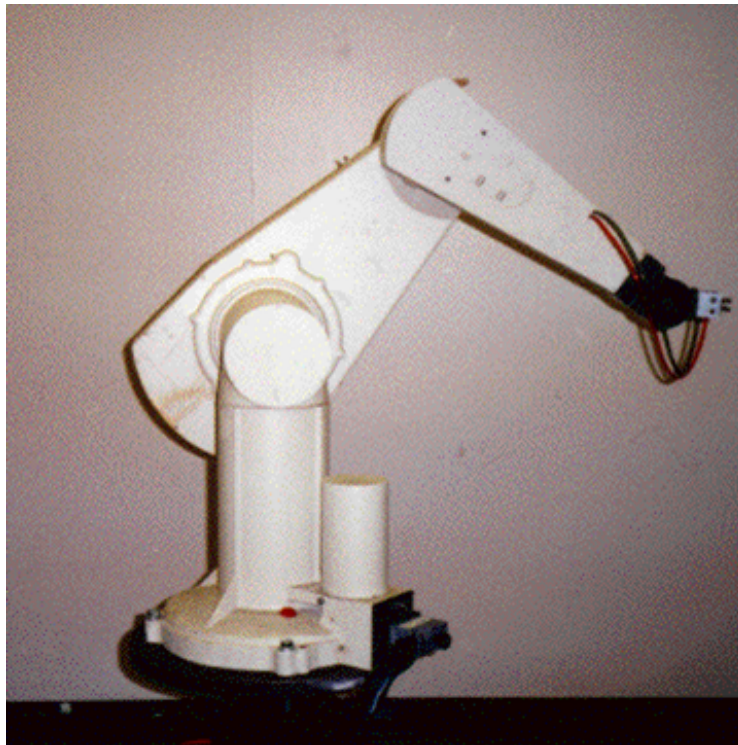


- ◆ A: Six again. $2 \text{ base} + 1 \text{ shoulder} + 1 \text{ elbow} + 2 \text{ wrist} = 6$.

Kinematic joints, a quiz


Q: Joints examples: How many degrees of freedom they have?

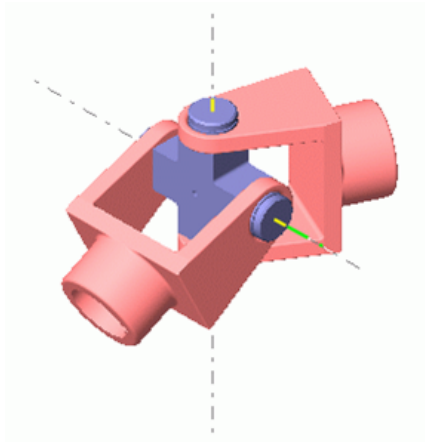

Cardan joint

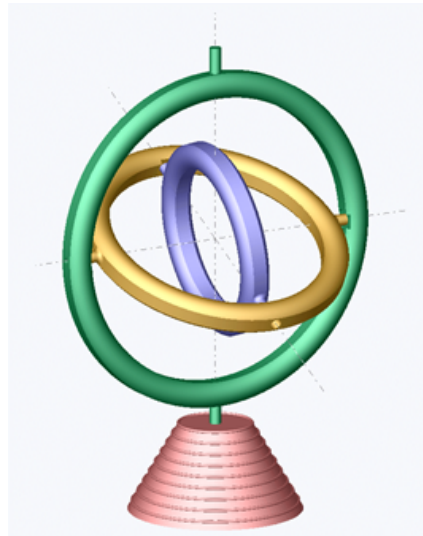

3D gimbal

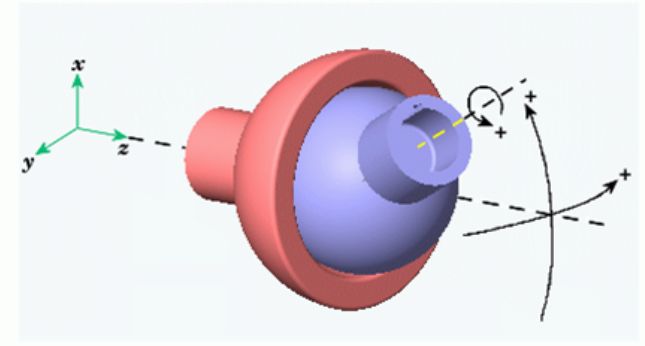


spherical


A:

Kinematic joints, answers to the quiz


Q: How many degrees of freedom?

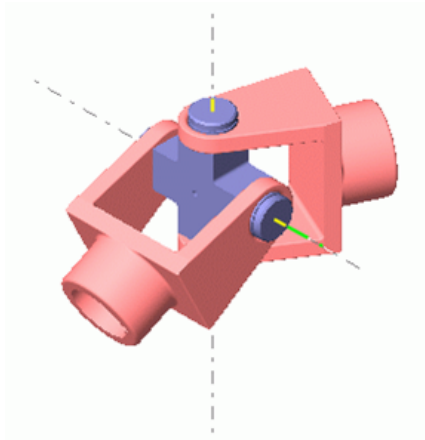

Cardan joint

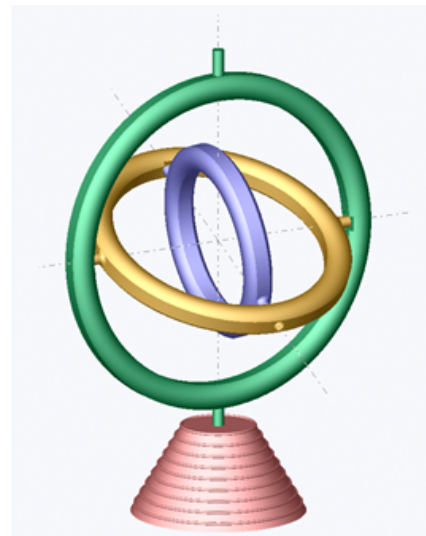

3D gimbal

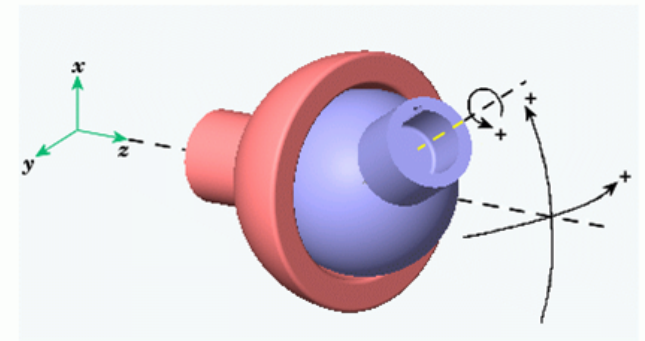


spherical

A: 2 DOFs


3 DOFs
singularities

3 DOFs
no singularities


Kinematic joints

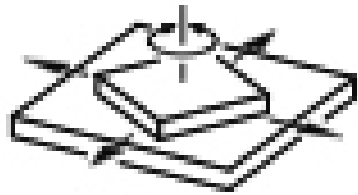


Planar
3 DOF




Spherical
3 DOF

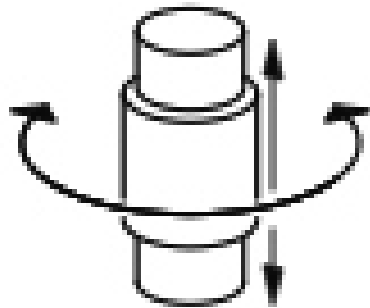


Cylindrical
2 DOF

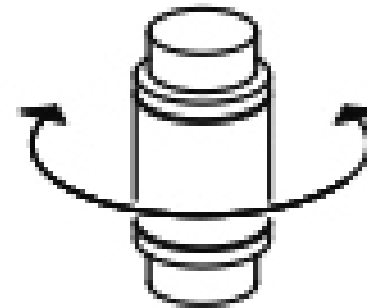

Revolute
1 DOF

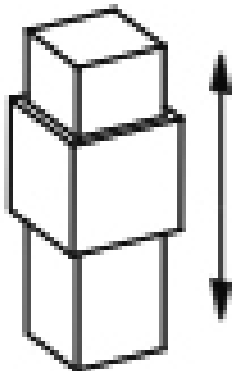


Prismatic
1 DOF


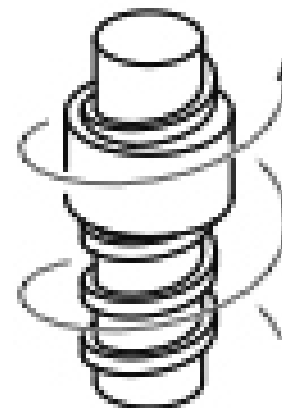


Helical
1 DOF

Structure of manipulators – Cartesian – PPP

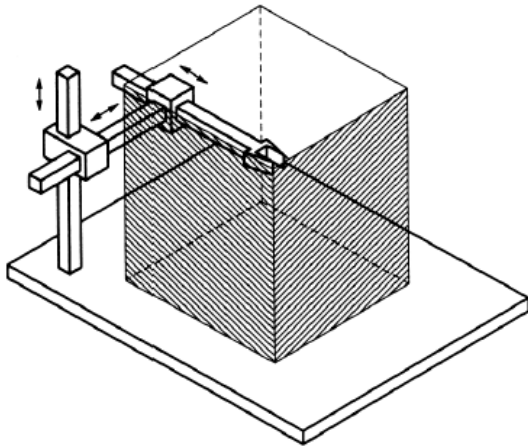


Cartesian

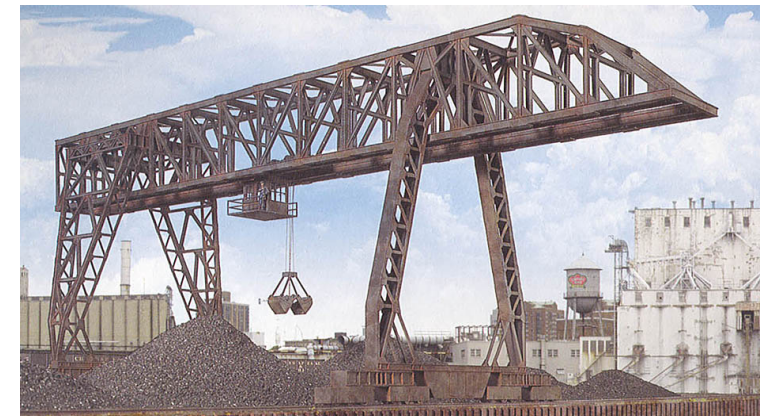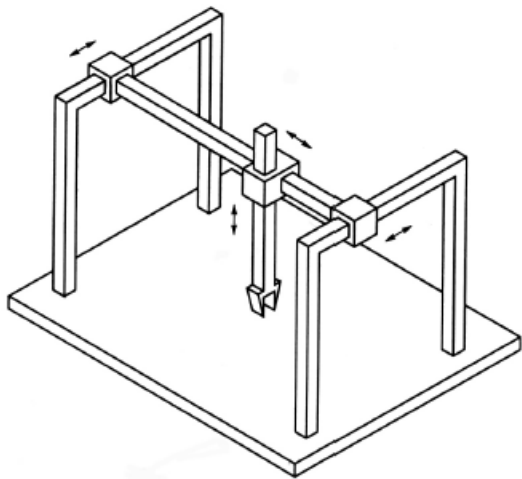


Gantry

Structure of manipulators – Cylindrical – RPP

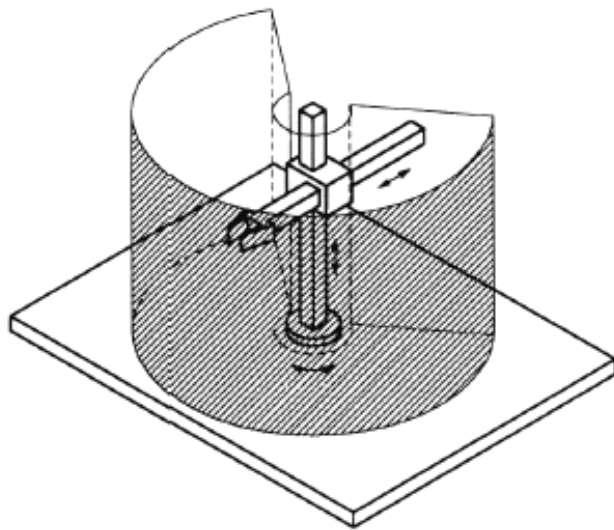


Structure of manipulators – Spherical – RRP

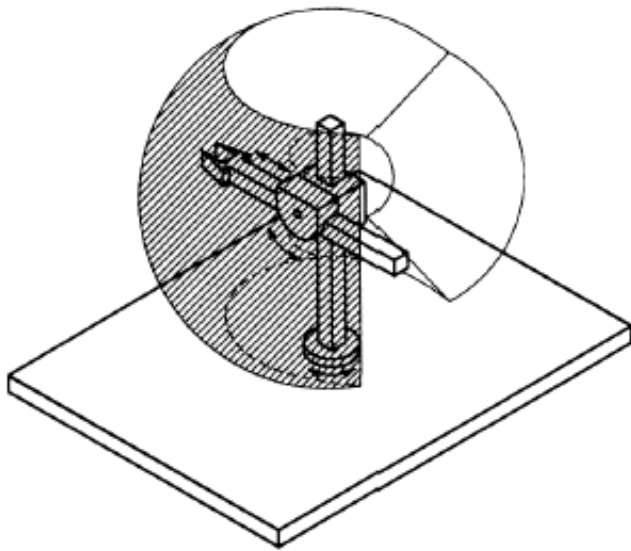


Structure of manipulators – Angular – RRR

Called also: anthropomorphic

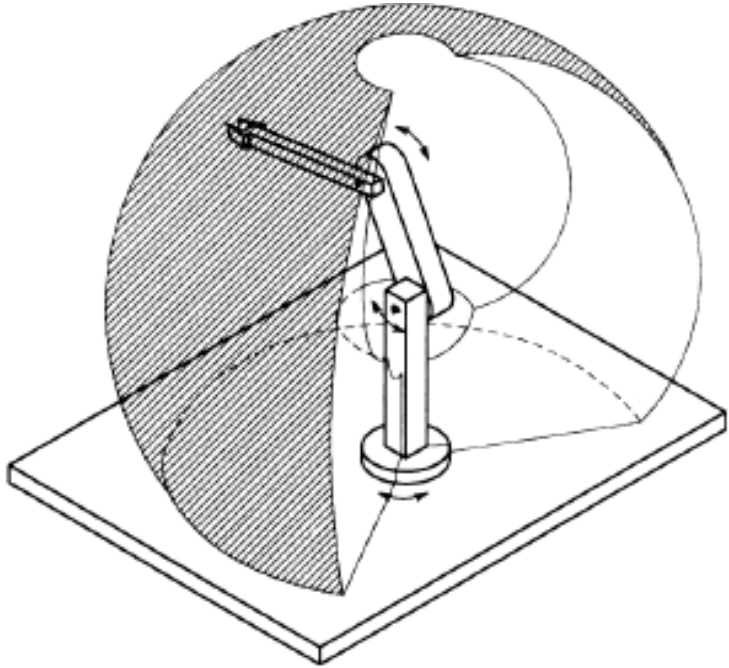

Structure of manipulators – SCARA – RRRP

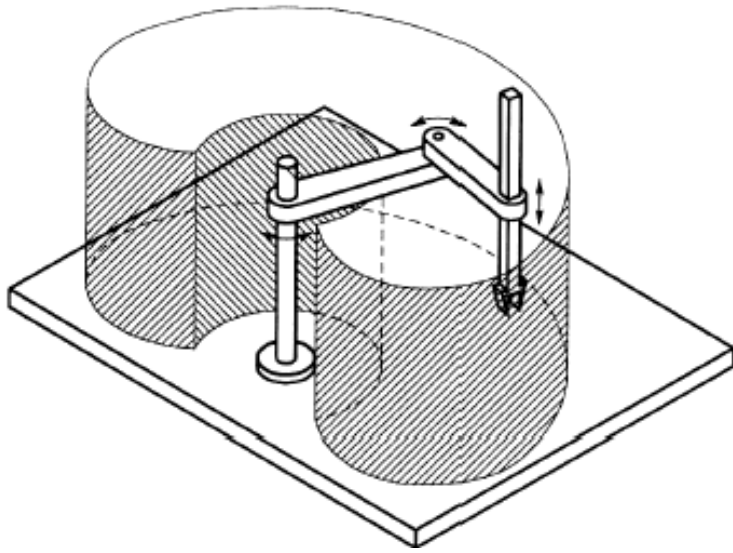

Structure of manipulators – Stewart platform

- ◆ Parallel kinematics.
- ◆ 6 DoFs.
- ◆ 6 prismatic actuators, commonly hydraulic jacks.
- ◆ Called also 6-axes platform or hexapod.
- ◆ Designed by V. E. Gough in 1954 for tyre testing.
- ◆ Published by D. Stewart in 1965.

Stewart platform, applications



Large jacks





FANUC




Flight simulator

Hexamod

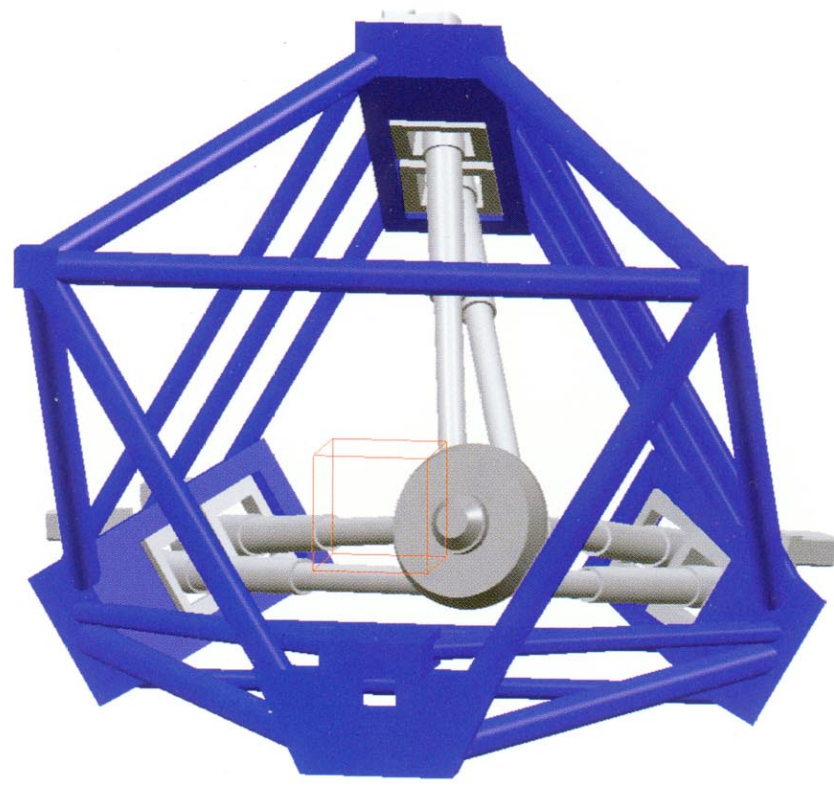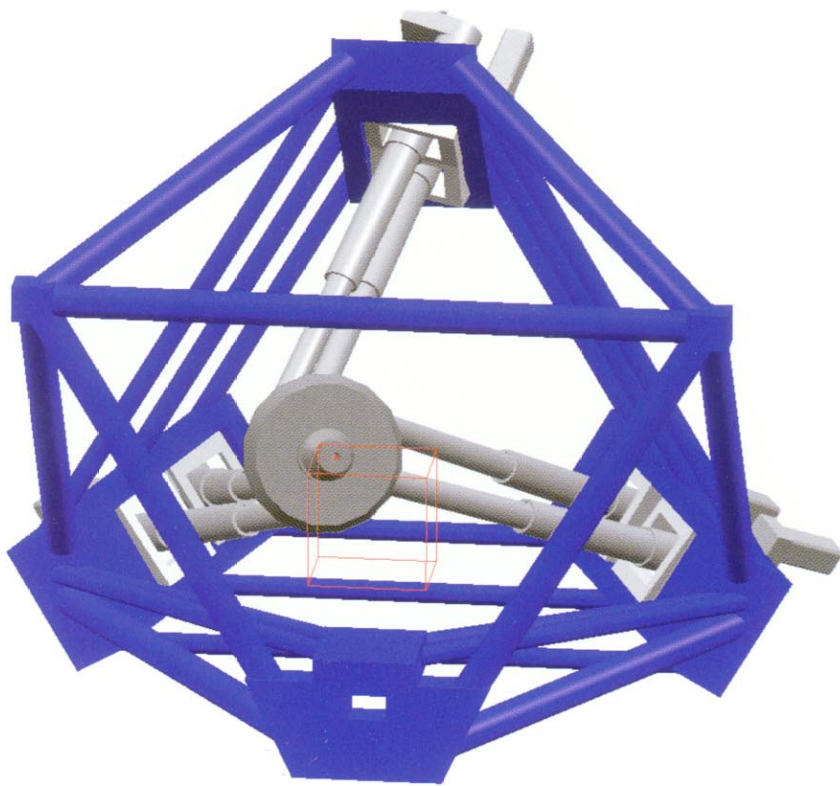

Real hexamod

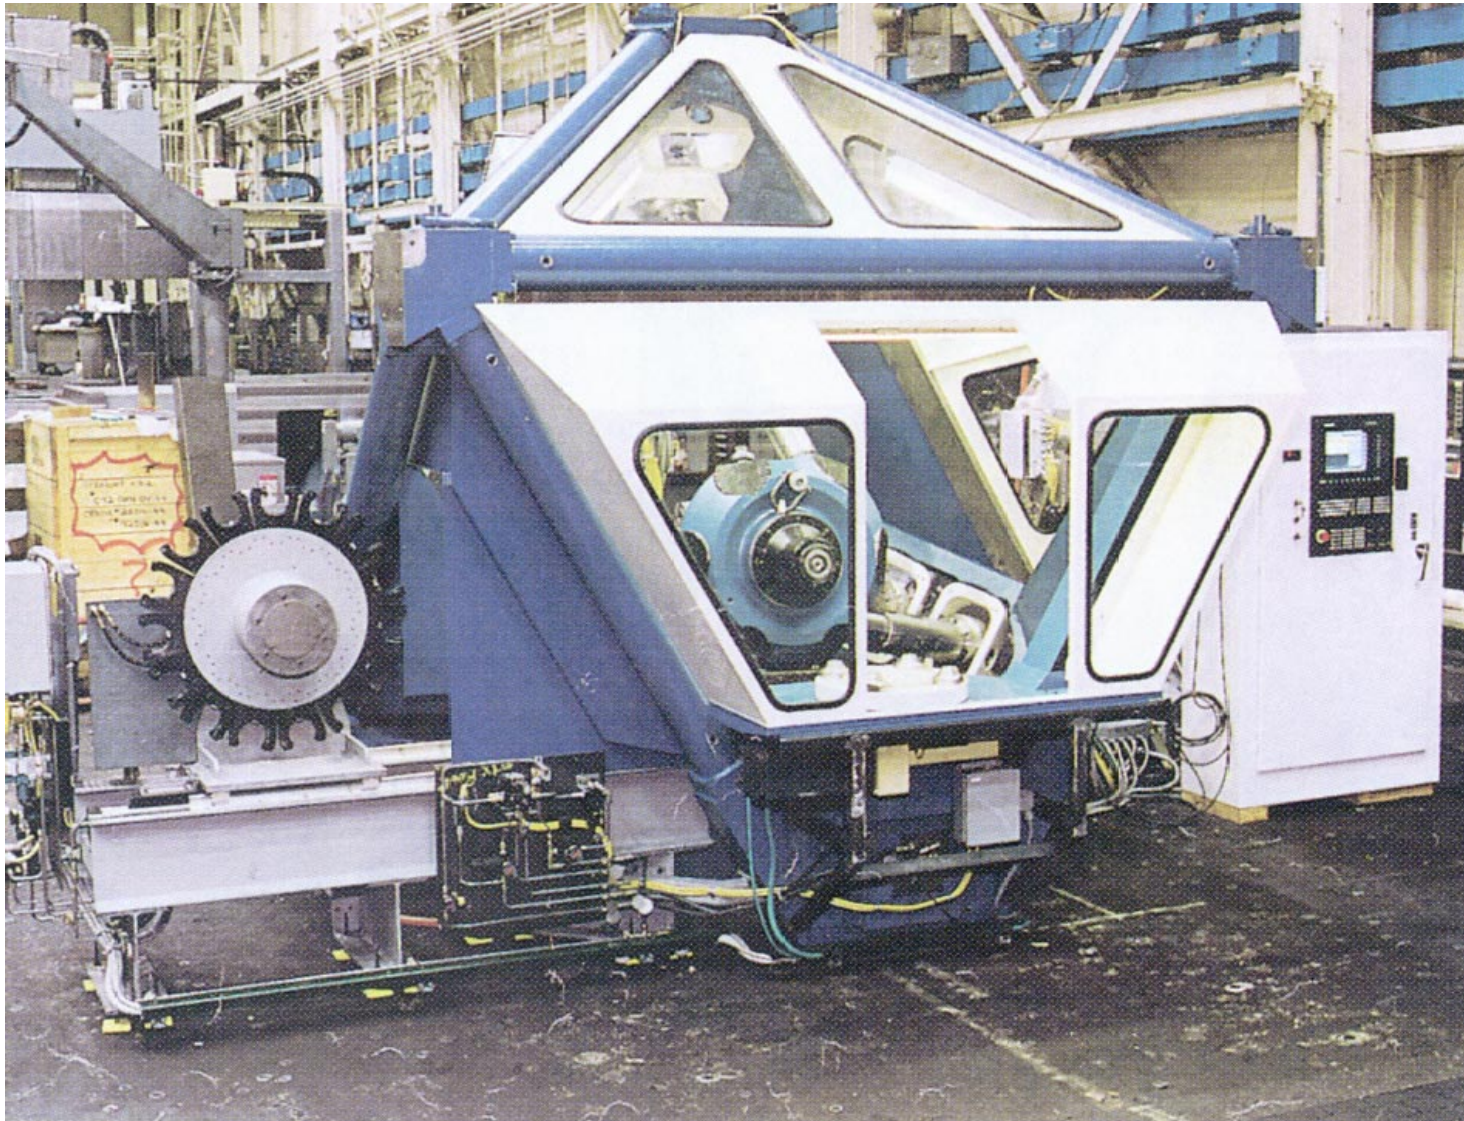

Direct vs. inverse kinematics

In an **open chain kinematic** manipulator robotics, there are two kinematic tasks:

1. **Direct (also forward) kinematics**

Given: joint relations (rotations, translations) for the robot arm.

Task: What is the orientation and position of the end effector?

2. **Inverse kinematics**

Given: the desired end effector position and orientation.

Task: What are the joint rotations and orientations to achieve this?

In a more general case of **close kinematic chain** mechanisms, a more general statement is needed:

1. **Direct kinematics**

Given: the geometric structure of the manipulator and the values of a number of joint positions equal to the number of degrees of freedom of the mechanism.


Task: Find a relative position and orientation of any two designed joints.

2. **Inverse kinematics**


Given: a relative position and orientation of any two designed joints.

Task: Find values of all joints position and orientations.


Coordinate frames

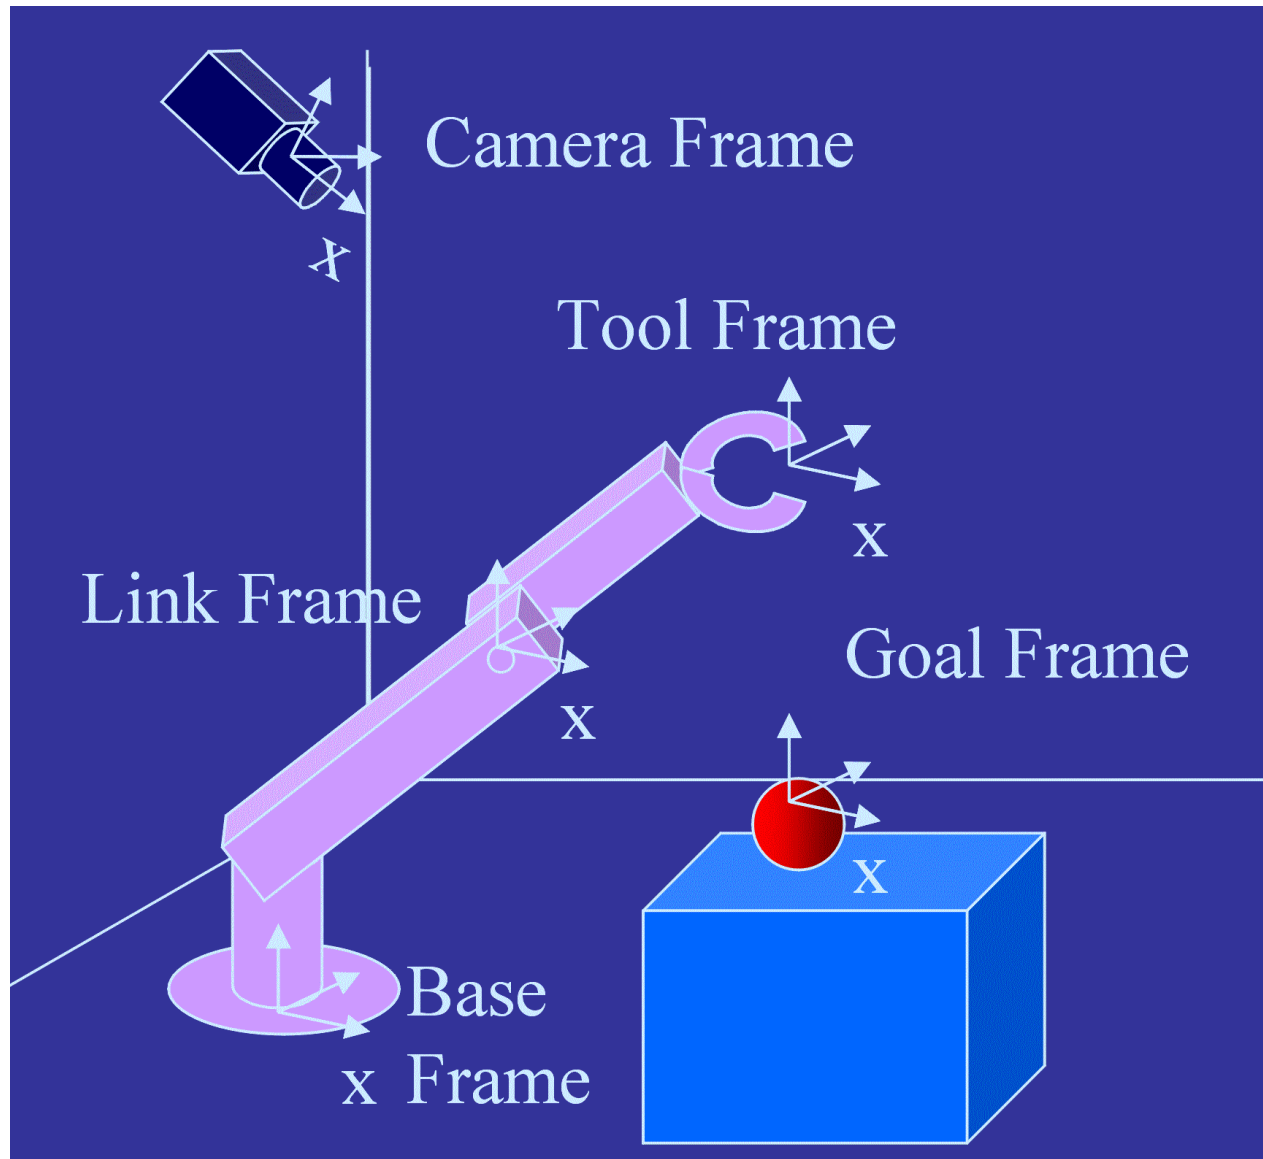

Two basic types of joints

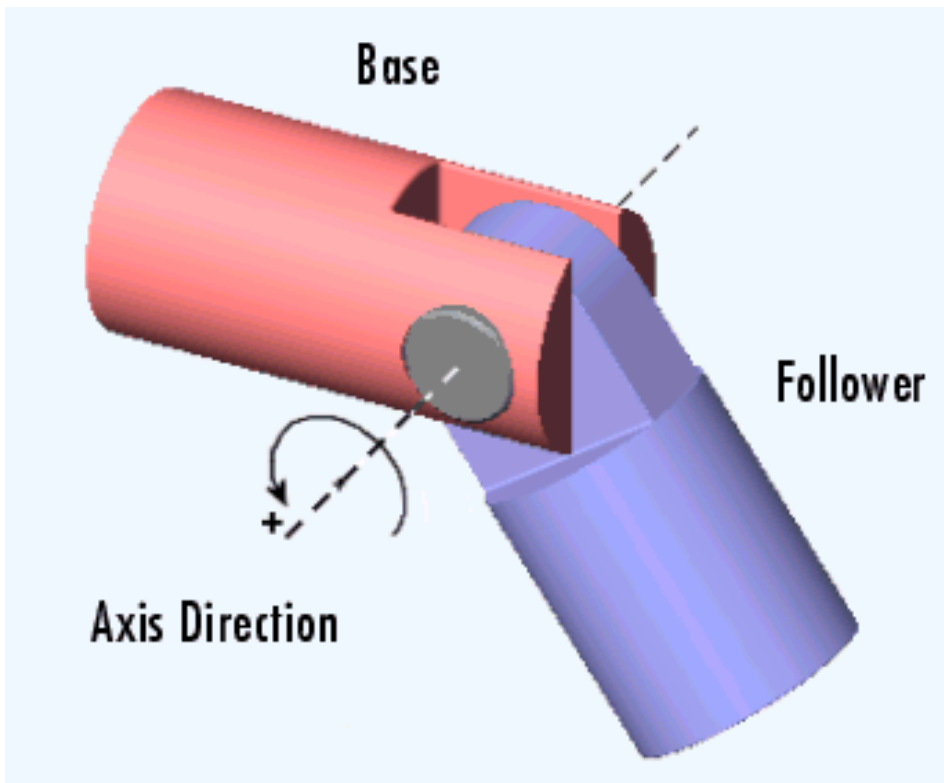


Revolute

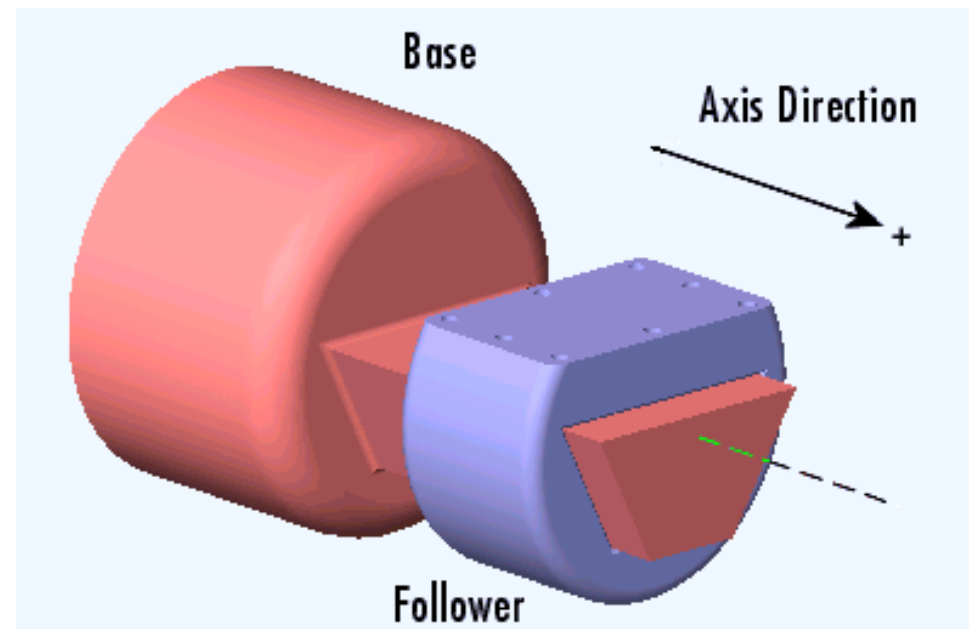

Prismatic


Manipulator description

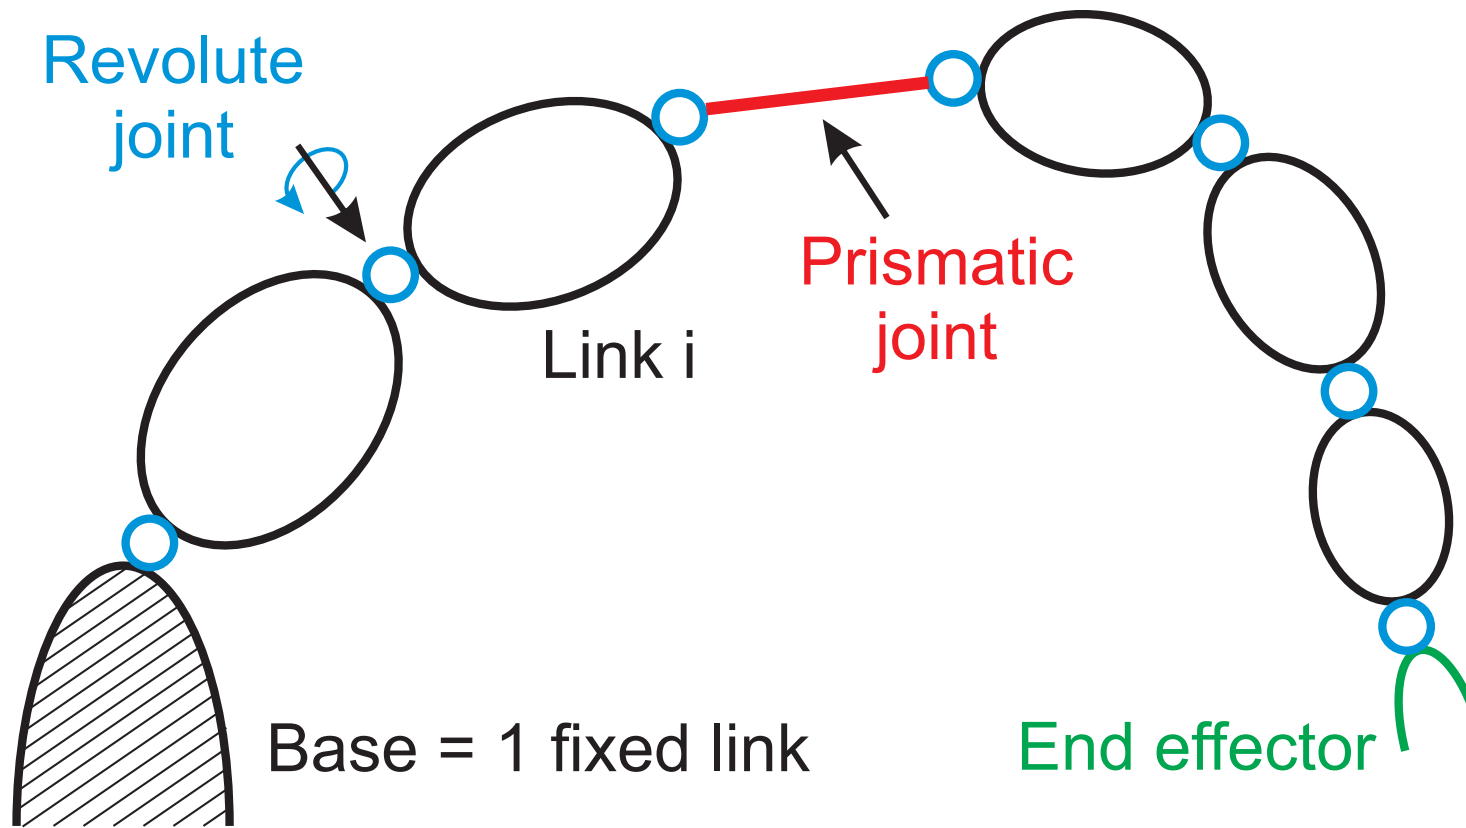

- ◆ Links: n moving links, 1 fixed link (base).
- ◆ Joints: revolute (1 DOF), prismatic (1 DOF).

Configuration parameters


- ◆ Configuration parameters are given by a set of positions describing the full configuration of the system.

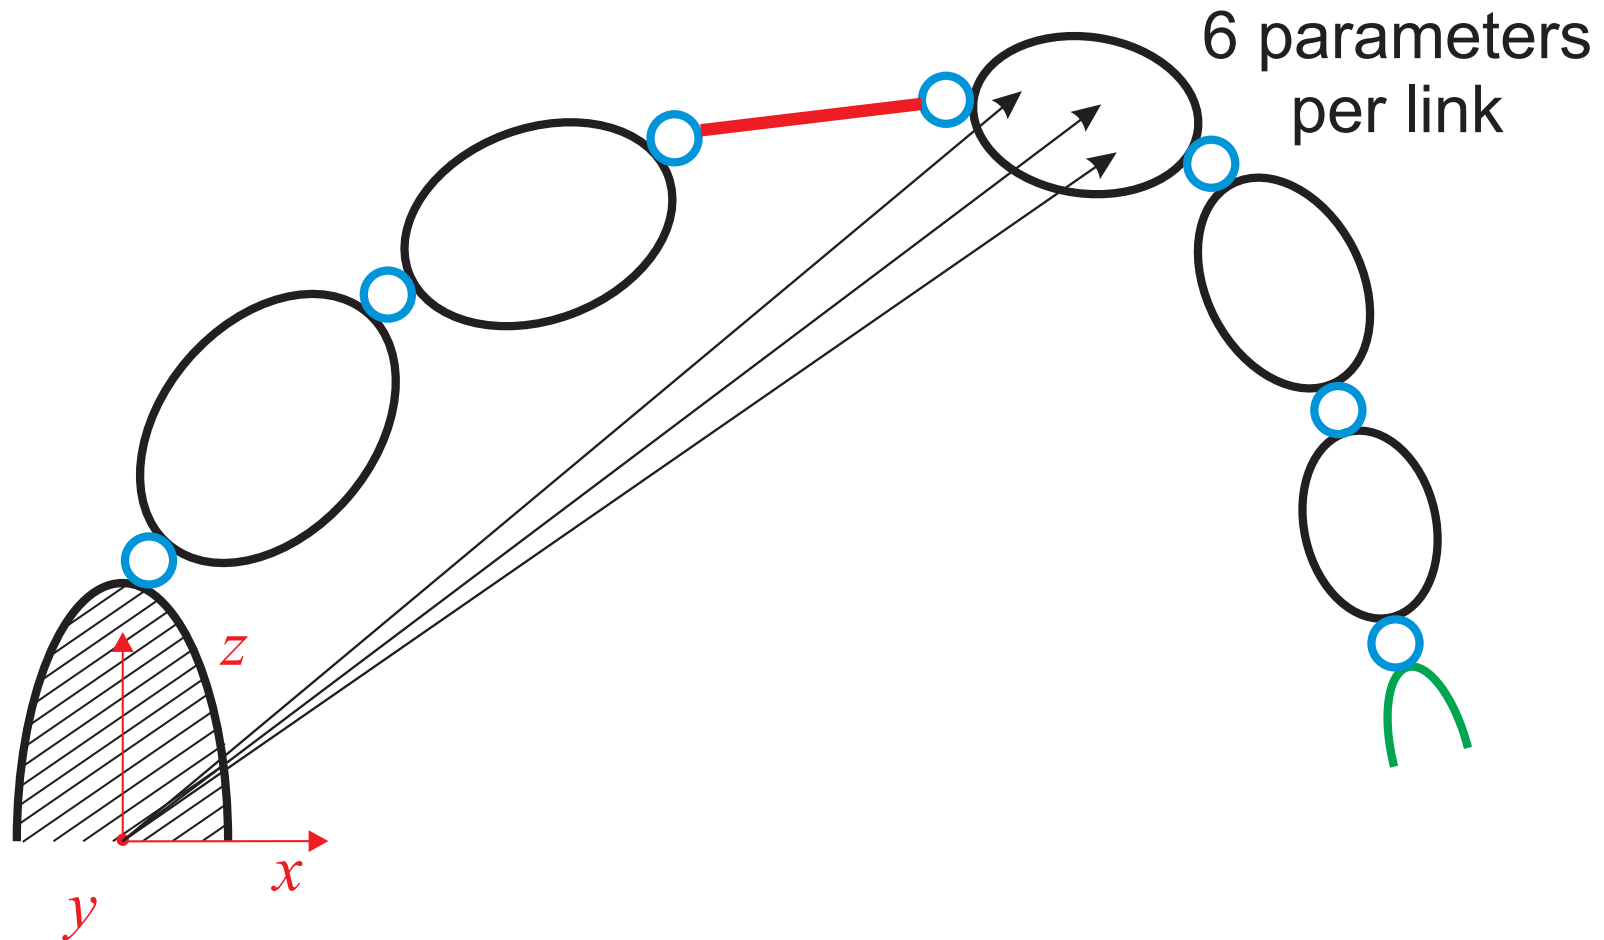

- ◆ Generalized coordinates – a set of independent configuration parameters.
- ◆ Degrees of freedom – number of generalized coordinates.


Generalized coordinates (1)

6 parameters
(3 positions, 3 orientations)

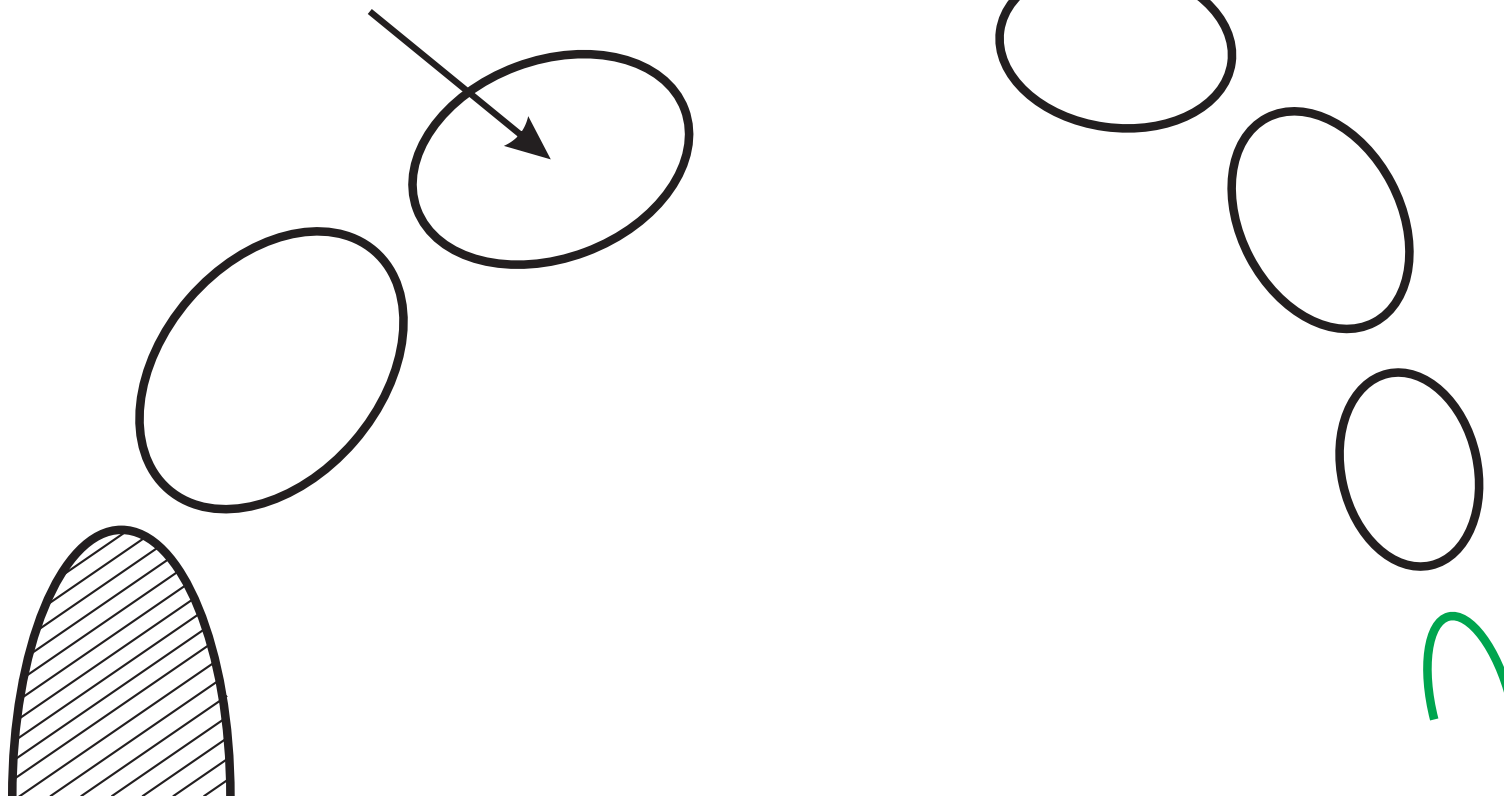


n unconstrained moving links $\Rightarrow 6n$ parameters.

Generalized coordinates (2)

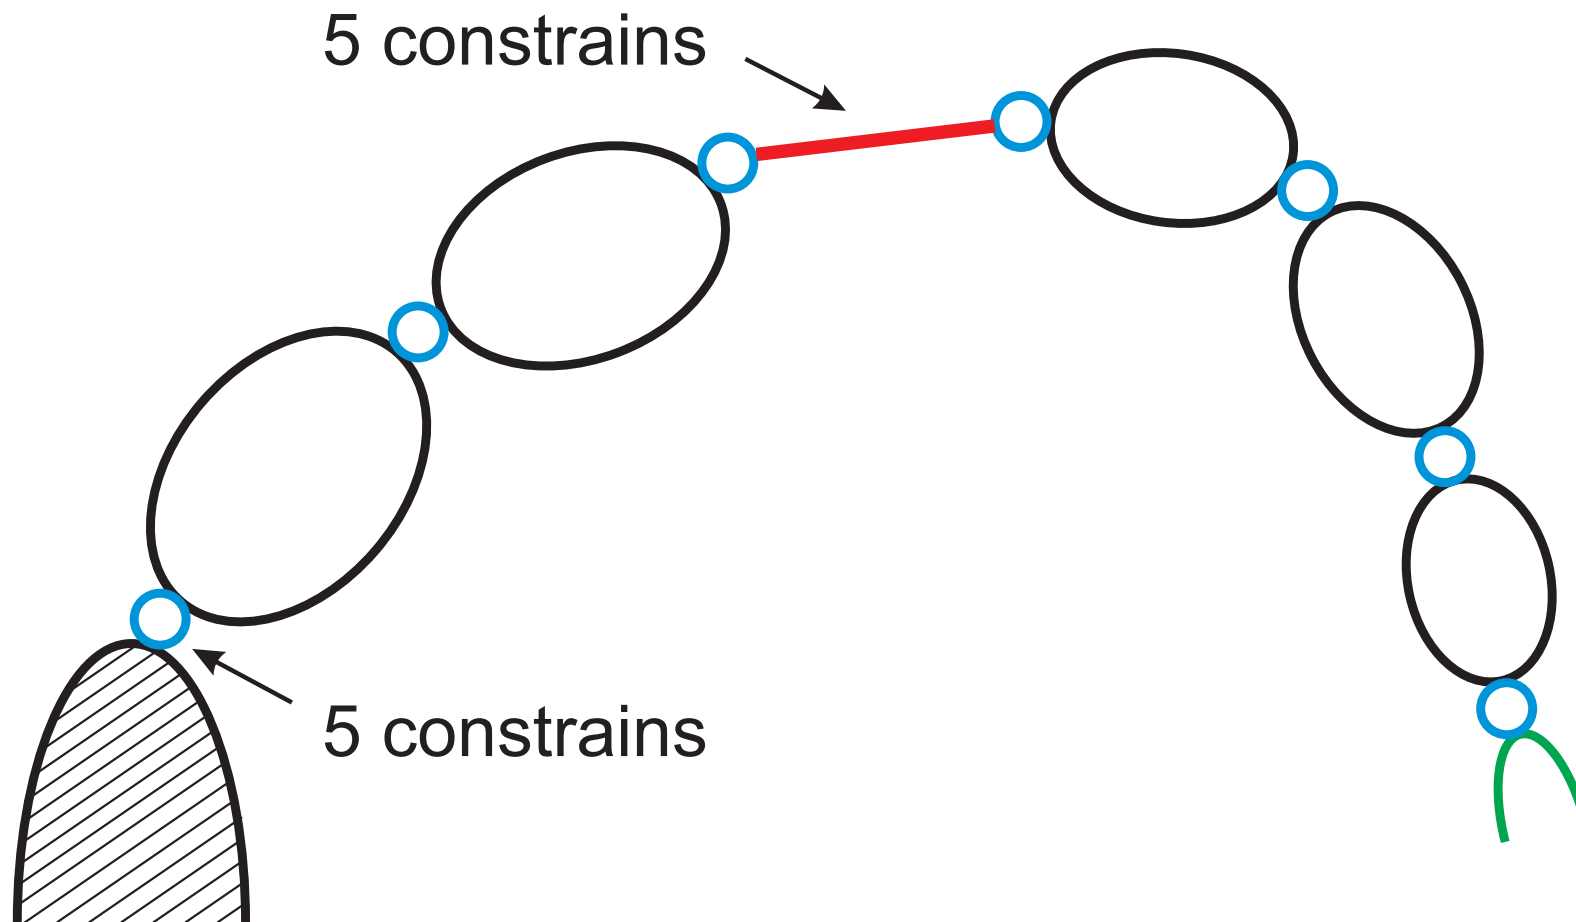


- ◆ n moving links $\Rightarrow 6n$ parameters.
- ◆ n 1 DOF joints $\Rightarrow 5n$ constraints.
- ◆ The system has $6n - 5n = n$ DOFs.

End-effector configuration parameters

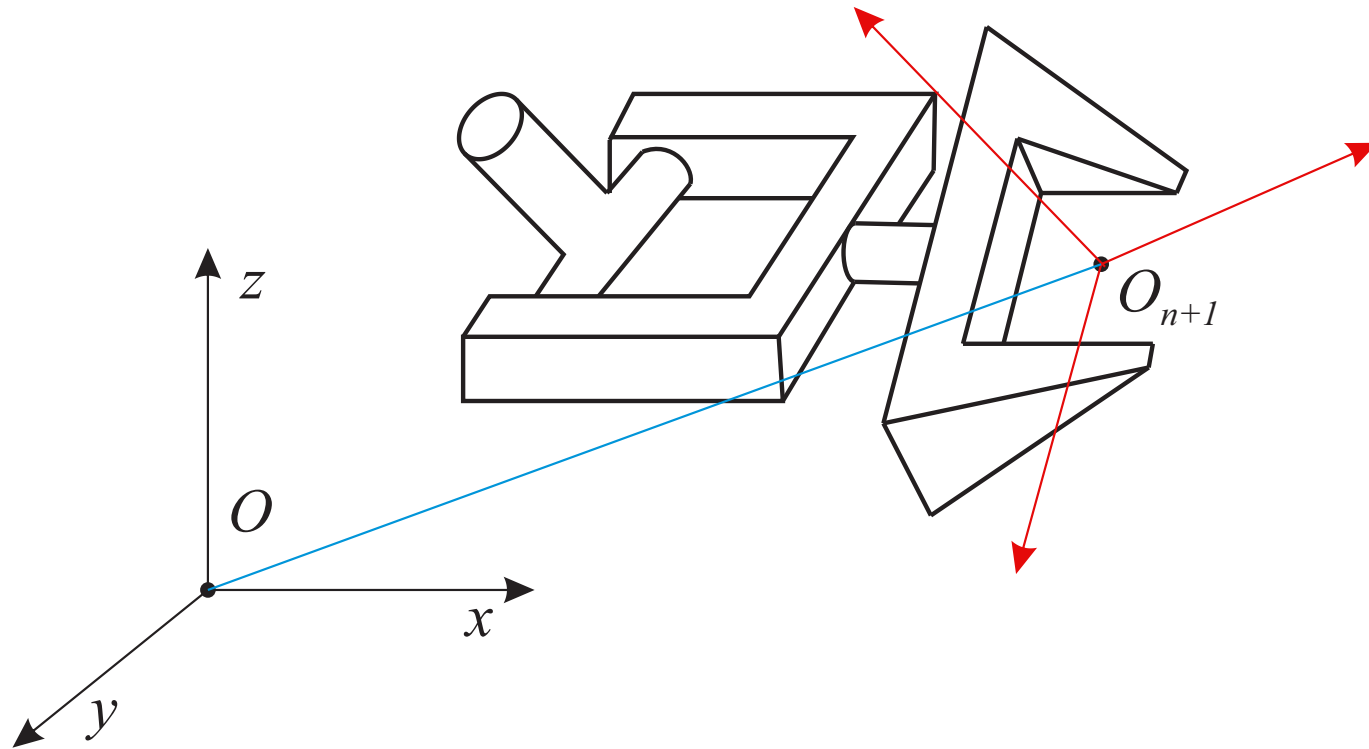


- ◆ O – Origin of the world coordinates at the manipulator base.
- ◆ O_{n+1} – Operational point, the representative point of the end-effector.
- ◆ (x_1, x_2, \dots, x_m) – A set of parameters, which specifies the end-effector position and orientation with respect to coordinate system O .

Operational (joints) coordinates

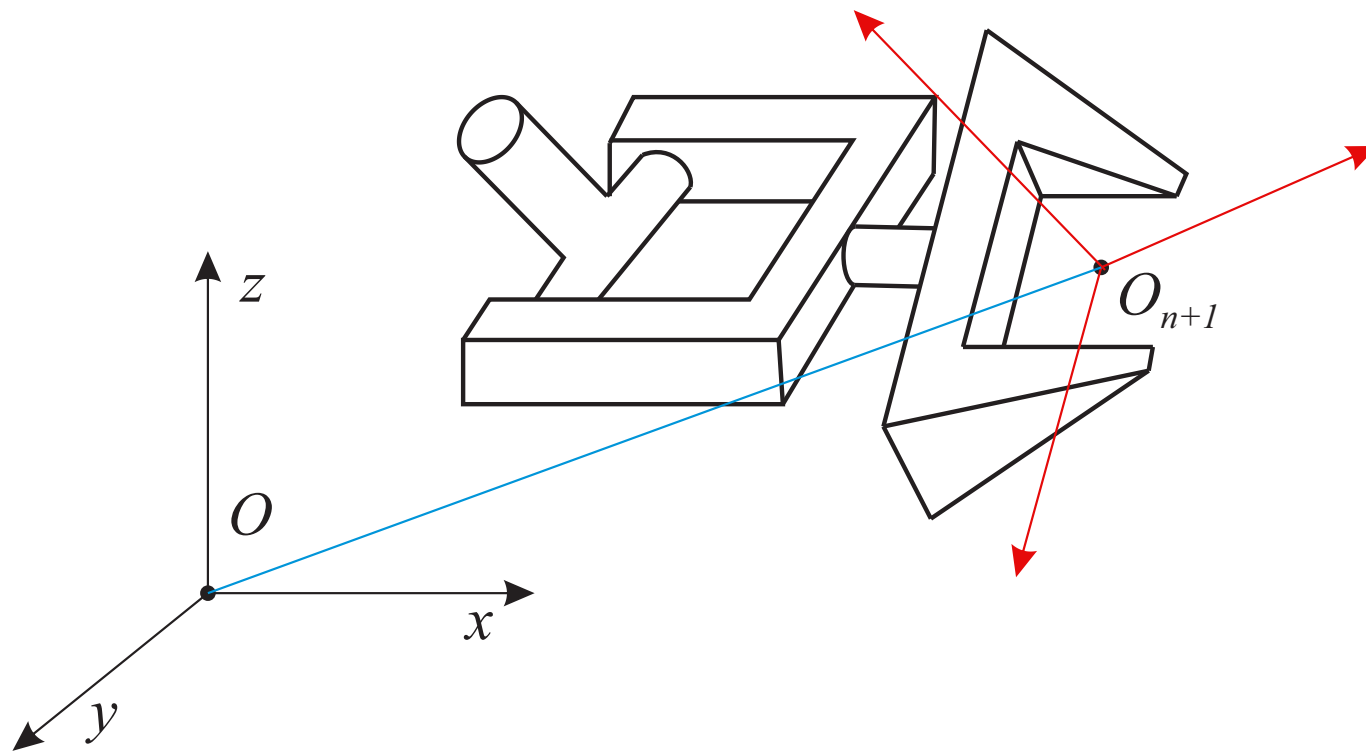


- ◆ (x_1, x_2, \dots, x_k) – A set of k , $k \leq m$ independent configuration parameters.
- ◆ m_0 – number of end-effector degrees of freedom.

Joint coordinates \rightarrow joint space

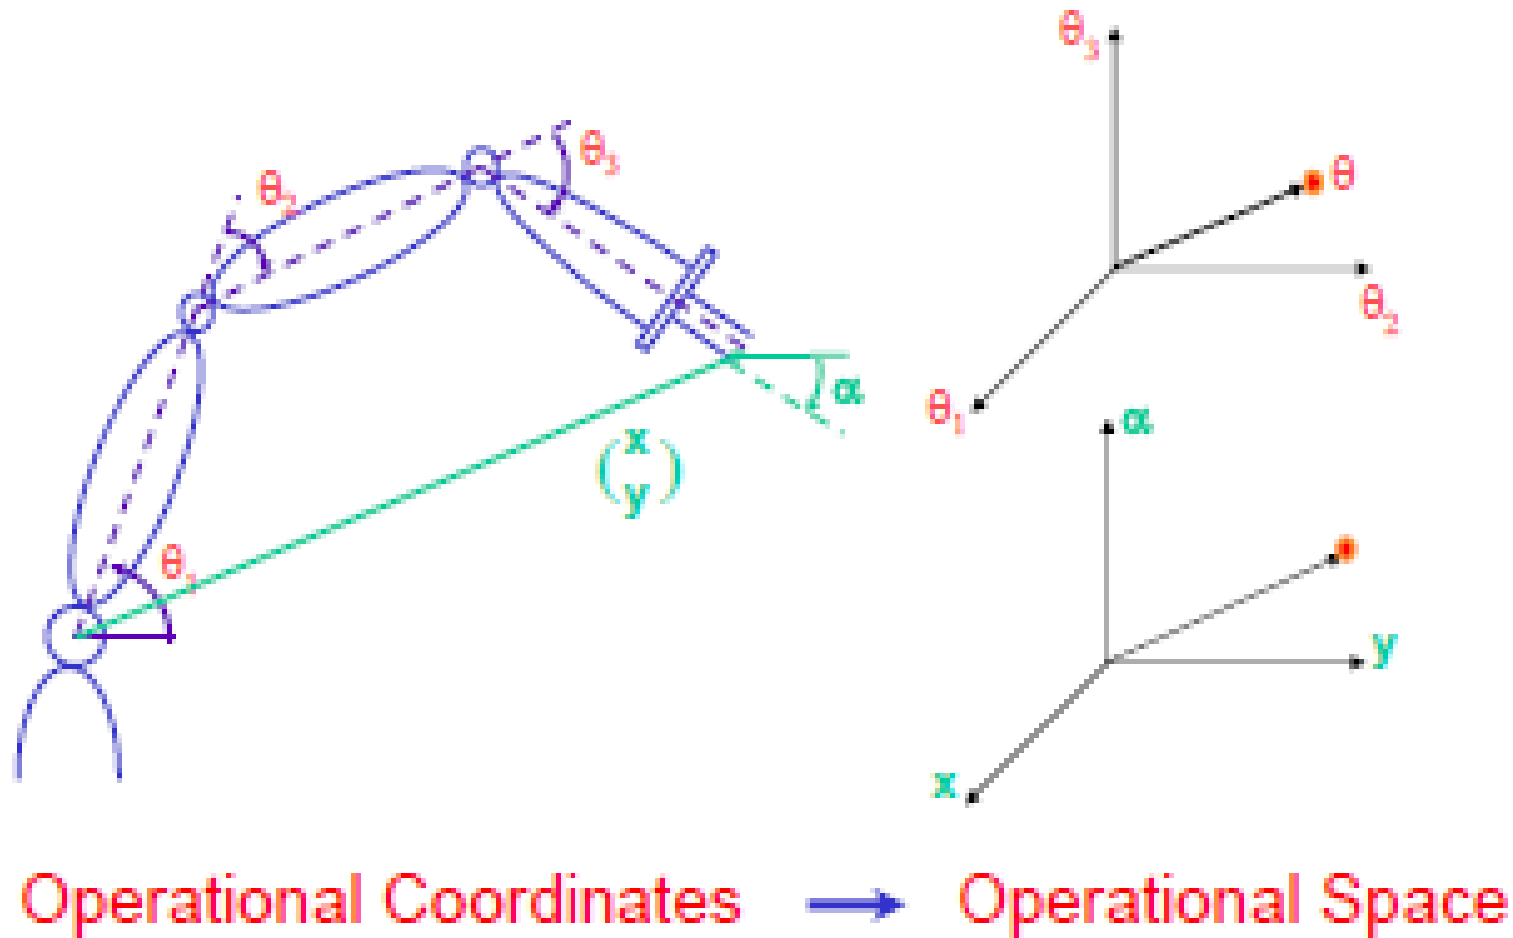

Manipulator redundancy

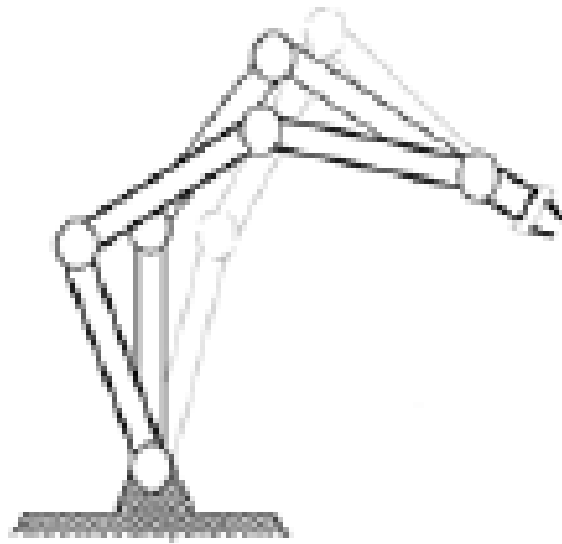


A robot is said to be redundant if

$$n > m_0$$

Degrees of redundancy: $n - m_0$

Two frames kinematic relationship

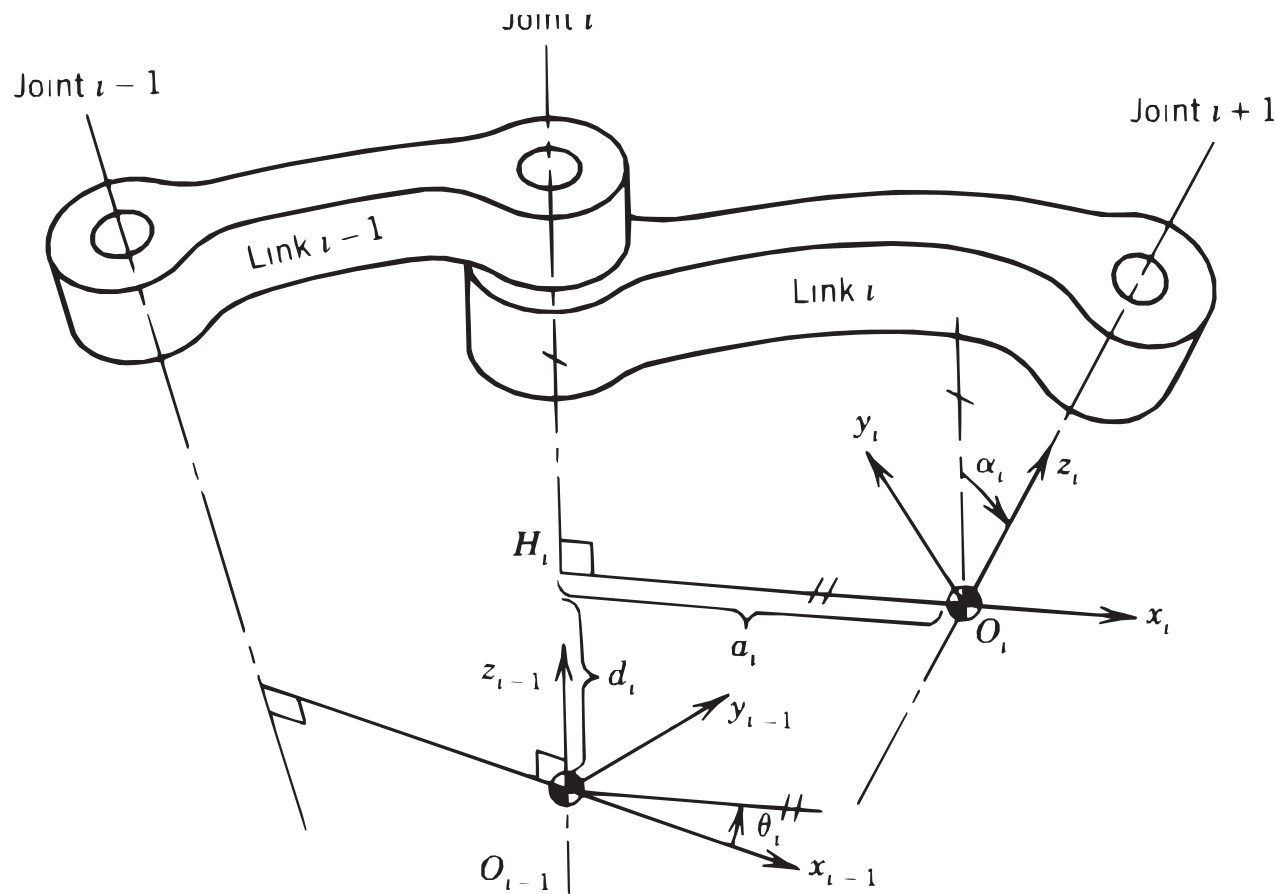


- ◆ There is a kinematic relationship between two frames, basically a translation and a rotation.
- ◆ This relationship is represented by a 4×4 homogeneous transformation matrix.

Homogeneous transformation

3x3 rotation matrix	$\left[\begin{array}{ccc c} r_1 & r_2 & r_3 & \Delta x \\ r_4 & r_5 & r_6 & \Delta y \\ r_7 & r_8 & r_9 & \Delta z \\ \hline 0 & 0 & 0 & 1 \end{array} \right]$	3x1 translation
1x3 perspective		global scale

Rotation matrix R is orthogonal $\Leftrightarrow R^T R = I \Rightarrow$ 3 independent entries, e.g., Euler angles.

Kinematic open chain

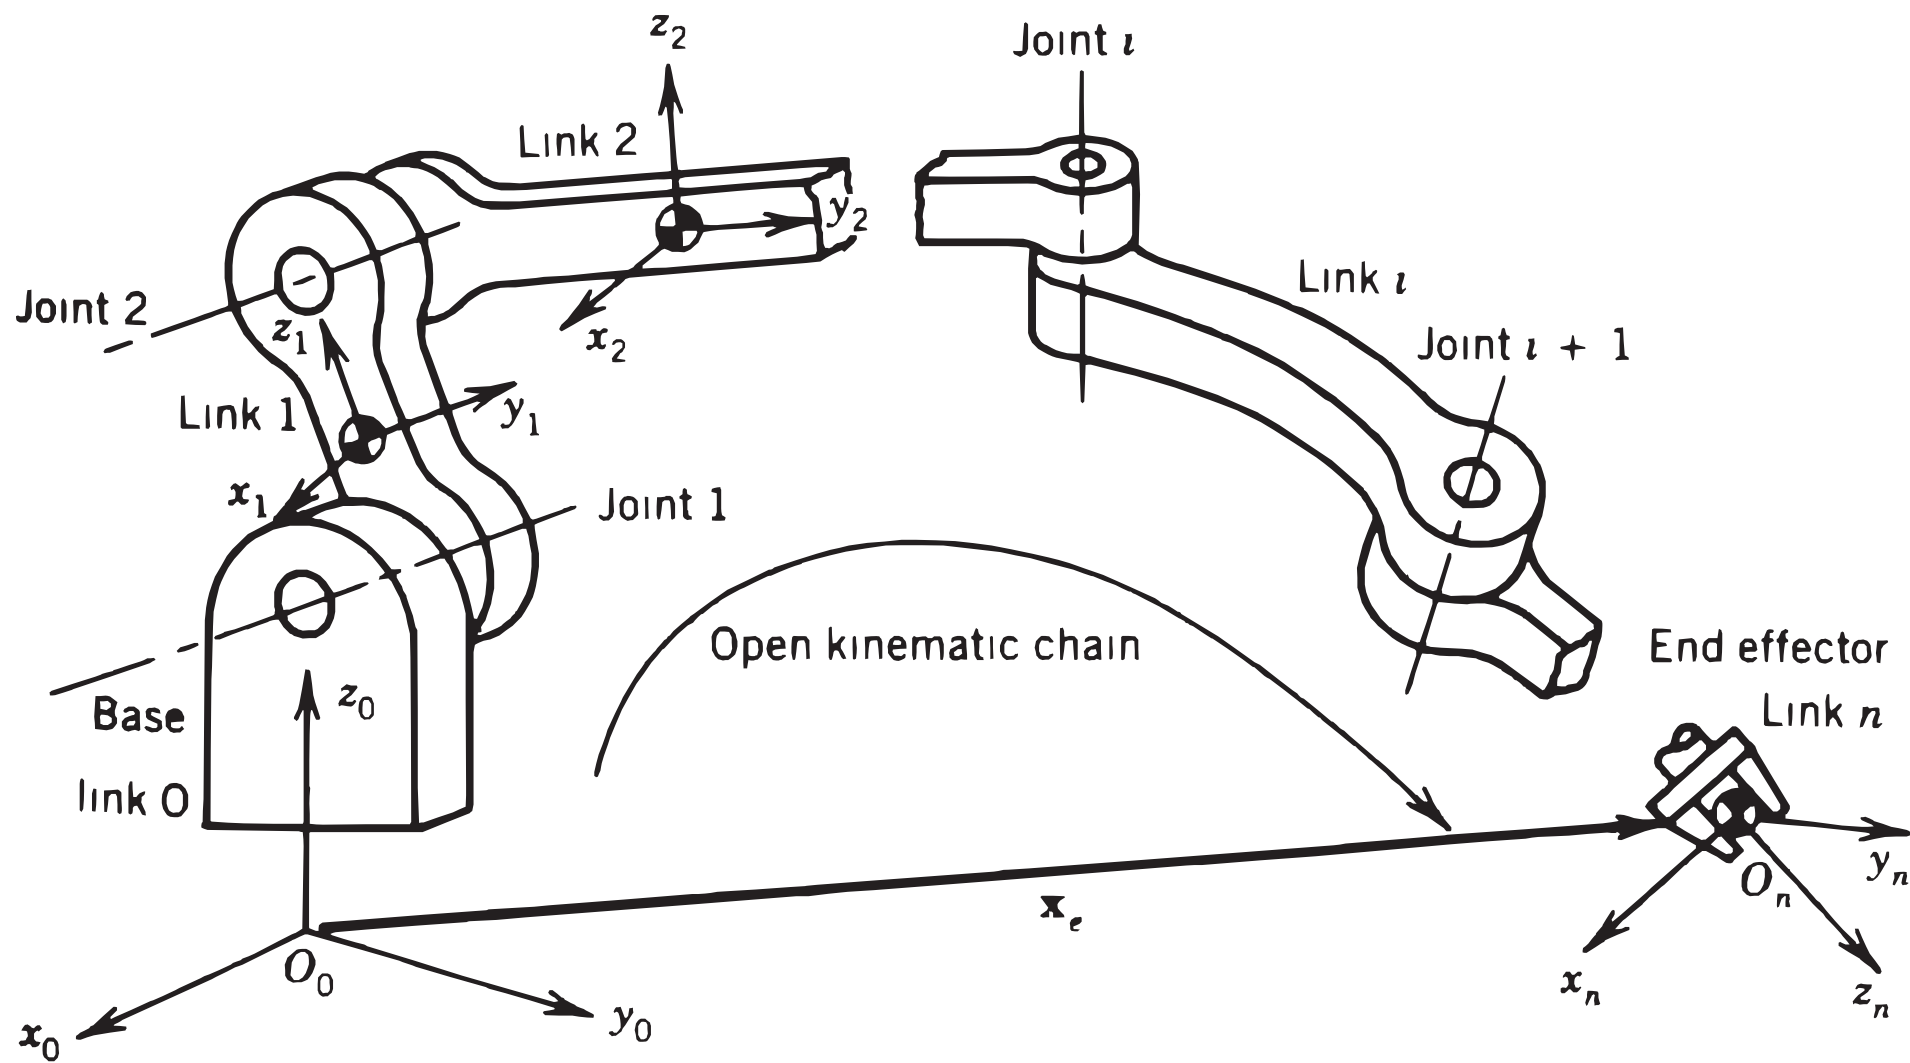

Direct vs. inverse kinematics, a reminder

In an **open chain kinematic** manipulator robotics, there are two kinematic tasks:

1. **Direct (also forward) kinematics**

Given: joint relations (rotations, translations) for the robot arm.


Task: What is the orientation and position of the end effector?

2. **Inverse kinematics**

Given: the desired end effector position and orientation.

Task: What are the joint rotations and orientations to achieve this?

Direct kinematics

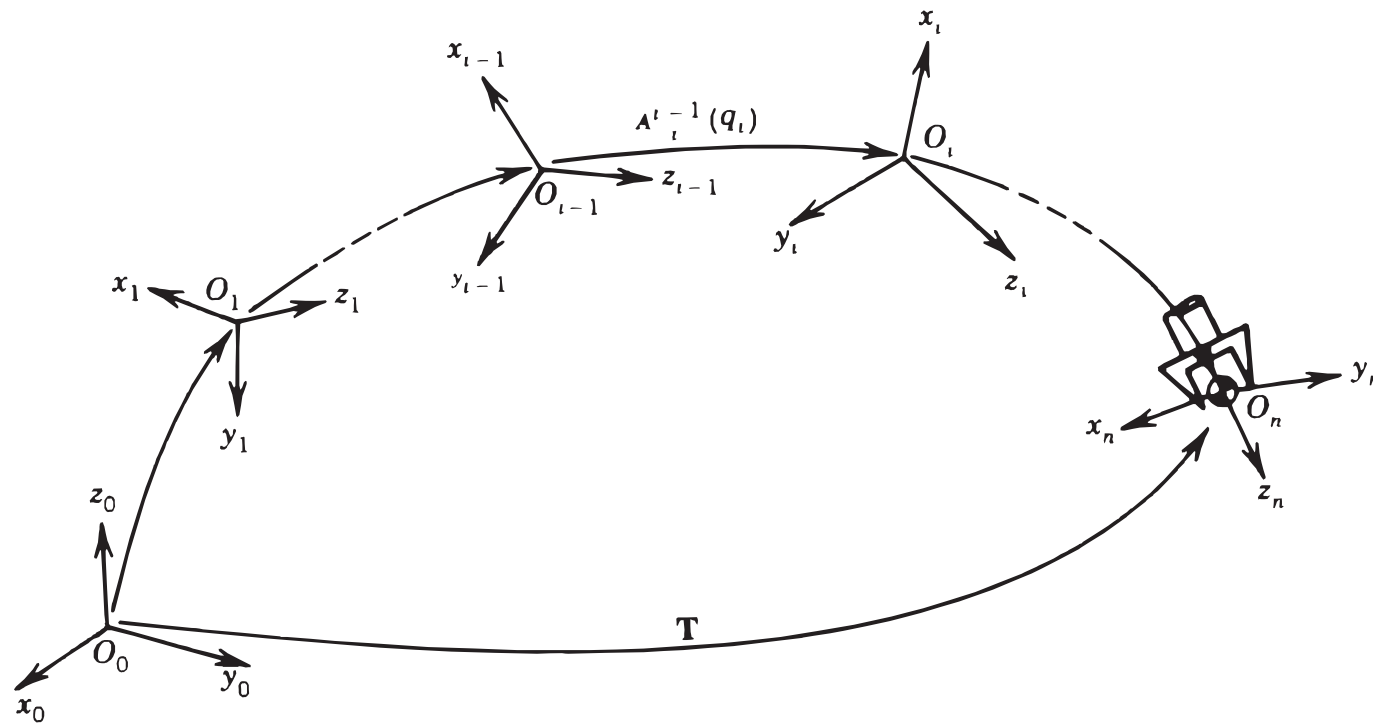


- ◆ One joint: $\mathbf{x}_i = A\mathbf{x}_{i-1}$.
- ◆ Chain of joints: $\mathbf{x}_{n-1} = A_{n-1} A_{n-2} \dots A_1 A_0 \mathbf{x}_0$.
- ◆ Easy to compute (matrix multiplication).
- ◆ Unique solution.

Inverse kinematics

- ◆ For an open chain kinematic mechanism (a robot), the inverse kinematic problem is difficult to solve.
- ◆ The robot controller must solve a set of non-linear simultaneous algebraic equations.
- ◆ Source of problems:
 - Non-linear equations (sin, cos in rotation matrices).
 - The existence of multiple solutions.
 - The possible non-existence of a solution.
 - Singularities.

Inverse kinematics, simplifications

- ◆ Divide and conquer strategy. Decouple the problem into independent subproblems.
- ◆ The spherical wrist. Positioning of the wrist + positioning within the wrist.
- ◆ Design conventions, e.g. Denavit-Hartenberg systematic frame assignment.

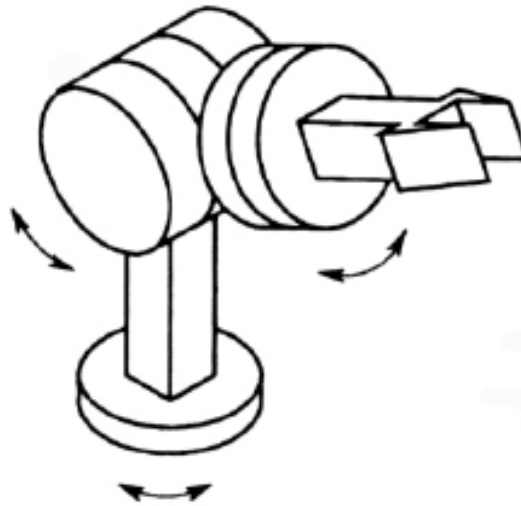

Methods solving the inverse kinematics task

1. **Closed-form solutions.** Relevant for industrial manipulators.
 - ◆ Algebraic methods.
 - ◆ Geometric methods.
2. **Numerical methods.**
 - ◆ *Symbolic elimination methods*: involve analytical manipulations to eliminate variables from a system of nonlinear equations to reduce it to a smaller set of equations.
 - ◆ *Continuation methods*: involve tracking a solution path from a start system with known solutions to a target system.
 - ◆ *Iterative methods*: are in general based on Newton-Raphson method using 1st order approximation of the original algebraic equation. They converge in a single solution (from several possible) based on the initial guess.