

# Introduction to Robotics

Jan Faigl

Department of Computer Science  
Faculty of Electrical Engineering  
Czech Technical University in Prague

Lecture 01

## B4M36UIR – Artificial Intelligence in Robotics

## Overview of the Lecture

- Part 1 – Course Organization
  - Course Goals
  - Means of Achieving the Course Goals
  - Evaluation and Exam
- Part 2 – Introduction to Robotics
  - Robots and Robotics
  - Challenges in Robotics
  - What is a Robot?
  - Locomotion

## Course and Lecturers

### B4M36UIR – Artificial Intelligence in Robotics

- <https://cw.fel.cvut.cz/wiki/courses/b4m36uir/>
- Department of Computer Science – <http://cs.fel.cvut.cz>
- Artificial Intelligence Center (AIC) – <http://aic.fel.cvut.cz>
- Lecturers

doc. Ing. **Jan Faigl**, Ph.D.

- Center for Robotics and Autonomous Systems (CRAS)  
<http://robotics.fel.cvut.cz>
- Computational Robotics Laboratory (ComRob)  
<http://comrob.fel.cvut.cz>



Mgr. **Viliam Lisý**, M.Sc., Ph.D.

- Game Theory (GT) research group
- Adversarial planning, Game Theory,



## Course Goals




- **Master** (yourself) with applying AI methods in robotic tasks  
*Labs, homeworks, exam*
- **Become** familiar with the notion of intelligent robotics and autonomous systems
- **Acquire** knowledge of robotic data collection planning
- **Acquire experience** on combining approaches in autonomous robot control programs  
*Integration of existing algorithms (implementation) in to mission planning software and robot control program*
- **Experience** solution of robotic problems  
*Your own experience!*

## Course Organization and Evaluation

- B4M36UIR and BE4M36UIR – Artificial intelligence in robotics
- Extent of teaching: 2(lec)+2(lab);
- Completion: Z,ZK; Credits: 6;  
*Z – ungraded assessment, ZK – exam*
- Ongoing work during the semester – labs' tasks and homeworks  
*Be able to independently work with the computer in the lab (class room)*
- Exam: test and exam  
*Be able to independently work with the computer in the lab (class room)*
- Attendance to labs and successful evaluation of homeworks

## Resources and Literature




### Textbooks

-  Introduction to AI Robotics, Robin R. Murphy  
MIT Press, 2000  
*First lectures for the background and context*
-  The Robotics Primer, Maja J. Mataric,  
MIT Press, 2007  
*First lectures for the background and context*
-  Planning Algorithms, Steven M. LaValle,  
Cambridge University Press, 2006.  
<http://planning.cs.uiuc.edu>



- **Lectures** – “comments” on the textbooks, slides, and **your notes**
- **Laboratory Exercises** – labs' tasks and homeworks
- **Selected research papers** – further specified during the course

## Further Books 1/2

-  Principles of Robot Motion: Theory, Algorithms, and Implementations, H. Choset, K. M. Lynch, S. Hutchinson, G. Kantor, W. Burgard, L. E. Kavraki and S. Thrun, MIT Press, Boston, 2005.
-  Introduction to Autonomous Mobile Robots, 2nd Edition, Roland Siegwart, Illah R. Nourbakhsh, and Davide Scaramuzza, MIT Press, 2011
-  Computational Principles of Mobile Robotics, Gregory Dudek and Michael Jenkin, Cambridge University Press, 2010



## Further Books 2/2


-  Robot Motion Planning and Control, Jean-Paul Laumond, Lectures Notes in Control and Information Sciences, 2009.  
<http://homepages.laas.fr/jpl/book.html>
-  Probabilistic Robotics, Sebastian Thrun, Wolfram Burgard, Dieter Fox, MIT Press, 2005  
<http://www.probablistic-robotics.org/>
-  Robotics, Vision and Control: Fundamental Algorithms in MATLAB, Peter Corke, Springer, 2011  
<http://www.petercorke.com/RVC1/>



## Lectures – Winter Semester (WS) Academic Year 2017/2018

- Schedule for the academic year 2017/2018  
<http://www.fel.cvut.cz/en/education/calendar.html>
- Lectures:
  - Karlovo náměstí, Room No. KN:E-126, Monday, 9:15–10:45
- 14 teaching weeks 13 lectures
- New Year's Day – 1.1.2018 (Monday)

## Teachers

- Ing. Petr Čížek 
- Hexapod walking robots – design and motion control
- Vision based Simultaneous Location and Mapping (SLAM)
- Image processing and robot control on FPGA
- Motion planning and terrain traversability assessment

## Communicating Any Issues Related to the Course

- Ask the lab teacher or the lecturer
- Use e-mail for communication
  - Use your **faculty e-mail**
  - Put **UIR or B4M36UIR, BE4M36UIR** to the subject of your message
  - Send copy (Cc) to lecturer/teacher

## Computers and Development Tools

- Network boot with home directories (NFS v4)  
*Data transfer and file synchronizations – ownCloud, SSH, FTP, USB*
- Python or/and C/C++ (**gcc** or **clang**)
- V-REP robotic simulator <http://www.coppeliarobotics.com/>
- Open Motion Planning Library (OMPL) <http://ompl.kavrakilab.org/>
- Sources and libraries provided by **Computational Robotics Laboratory**
- Any other open source libraries
- Gitlab FEL – <https://gitlab.fel.cvut.cz/>
- FEL Google Account – access to Google Apps for Education  
See <http://google-apps.fel.cvut.cz/>
- Information resources (IEEE Xplore, ACM, Science Direct, Springer Link)
  - *IEEE Robotics and Automation Letters (RA-L), IEEE Transactions on Robotics (T-RO), International Journal of Robotics Research (IJRR), Journal of Field Robotics (JFR), Robotics and Autonomous Robots (RAS), Autonomous Robots (AuRo), etc.*

## Grading Scale

Grade	Points	Mark	Evaluation
A	≥ 90	1	Excellent
B	80–89	1,5	Very Good
C	70–79	2	Good
D	60–69	2,5	Satisfactory
E	50–59	3	Sufficient
F	<50	4	Fail

## Homeworks

- HW 01 (10 points) – Grid (graph) based planning
- HW 02 (10 points) – Motion planning in configuration space
- HW 03 (10 points) – Data collection planning
- HW 04 (10 points) – Adversarial planning
- All homeworks must be submitted to award an ungraded assessment
- **Late submission will be penalized!**

## Overview of the Lectures

1. Course information, Introduction to (AI) Robotics
2. Robotic Paradigms and Control Architectures
3. Path and Motion Planning
4. Trajectory Planning - Grid and Graph based methods
5. Trajectory Planning - Randomized sampling-based motion planning methods
6. Trajectory Planning - Improved sampling-based motion planning methods
7. Robotic information gathering and robotic exploration
8. Data collection planning and multi-goal path planning problems
9. Data collection planning with curvature-constrained vehicles
10. Multi-robot data collection planning
11. Game Theory in Robotics
12. Game Theory in Robotics
13. Game Theory in Robotics

## Course Evaluation

Points	Maximum Points	Required Minimum Points
Lab tasks	20	10
Homeworks*	40	20
Exam test	20	10
Exam	20	10
Total	100 points	<b>50 points is E!</b>

\*All homeworks have to be submitted

- **30** points from the semester are required for awarding ungraded assessment
- The course can be passed with **ungraded assessment and exam**
- All homeworks must be submitted and pass the evaluation

## Part II

## Part 2 – Introduction to Robotics






## What is a Robot?

A robot is an autonomous system which exists in the physical world, can sense its environment, and can act on it to achieve some goals

- The robot has a physical body in the physical world – **embodiment**
- The robot has **sensors** and it can **sense/perceive** its environment
- A robot has effectors and actuators – it can **act** in the environment
- A robot has **controller** which allows it to be **autonomous**

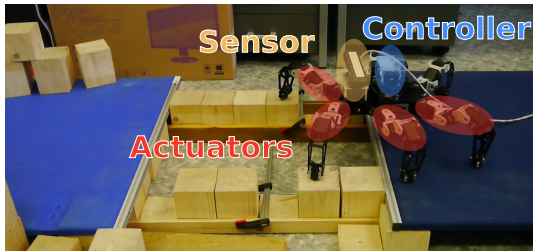

## Embodiment

- The robot body allows the robot to act in the physical world  
*E.g., to go, to move objects, etc.*
- Software agent is not a robot
- Embodied robot is under the same physical laws as other objects
  - Cannot change shape or size arbitrarily
  - It must use actuators to move
  - It needs energy
  - It takes some time to speed up and slow down
- Embodied robot has to be aware of other bodies in the world
  - Be aware of possible collisions
- The robot body influences how the robot can move

*Notice, faster robots look smarter*

## Sensing / Perception

- Sensors are devices that enable a robot to perceive its physical environment to get information about itself and its surroundings
- **Exteroceptive** sensors and **proprioceptive** sensors
- Sensing allows the robot to know its **state**
- State can be **observable**, **partially observable**, or **unobservable**
  - State can be **discrete** (e.g., on/off, up/down, colors) or **continuous** (velocity)
  - **State space** consists of all possible states in which the system can be
    - **space** refers to all possible values
  - **External state** – the state of the world as robot can sense it
  - **Internal state** – the state of the robot as the robot can perceive it  
*E.g., remaining battery*



## Sensors

- **Proprioceptive sensors** – measure internal status, e.g., encoders, inclinometer, inertial navigation systems (INS), compass, but also Global Positioning System (GPS)
- **Exteroceptive (proximity) sensors** – measure objects relative to the robot
- **Contact sensors** – e.g., mechanical switches, physical contact sensors that measure the interaction forces and torques, tactile sensors etc.
- **Range sensors** – measure the distance to objects, e.g., sonars, lasers, IR, RF, time-of-flight
- **Vision sensors** – complex sensing process that involves extraction, characterization, and information interpretation from images



## Action


- **Effectors** enable a robot to take an action
  - They use underlying mechanism such as muscles and motors called **actuators**
- Effectors and actuators provide two main types of activities
  - **Locomotion** – moving around  
*Mobile robotics – robots that move around*
  - **Manipulation** – handling objects  
*Robotic arms*
- Locomotion mechanisms – wheels, legs, modular robots, but also propellers etc.



*With more and more complex robots, a separation between mobile and manipulator robots is less strict and robots combine mobility and manipulation*

## Effectors and Actuators

- **Effector** – any device on a robot that has an effect on the environment
- **Actuator** – a mechanisms that allows the effector to execute an action or movement, e.g., motors, pneumatics, chemically reactive materials, etc.
- Electric motors – Direct-Current (DC) motors, gears,
  - **Servo motors** – can turn their shaft to a specific position  
*DC motor + gear reduction + position sensor + electronic circuit to control the motor*




*Hexapod with 3 servo motors (joints) per each leg and it has 18 servo motors in total*

## Degrees of Freedom (DOF)

- **Degree of Freedom (DOF)** is the minimal required number of independent parameters to completely specify the motion of a mechanical system  
*It defines how the robot can move*
- In 3D space, a body has usually 6 DOF (by convention)


- **Translational DOF** –  $x, y, z$
- **Rotational DOF** – *roll, pitch, and yaw*



- **Controllable DOF (CDOF)** – the number of the DOF that are controllable, i.e., a robot has an actuator for such a DOF

## DOF vs CDOF

- If a vehicle moves on a surface, e.g., a car, it actually moves in 2D
- The body is at the position  $(x, y) \in \mathbb{R}^2$  with an orientation  $\theta \in \mathbb{S}^1$
- A car in a plane has  $DOF = 3, (x, y, \theta)$  but  $CDOF=2, (v, \varphi)$   
*Only forward/reverse direction and steering angle can be controlled*

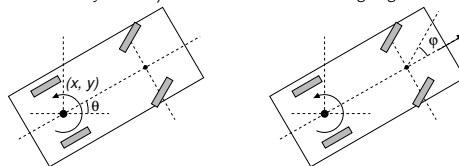

*That is why a parallel parking is difficult*

- A car cannot move in an arbitrary direction, but 2 CDOF can get car to any position and orientation in 2D
- To get to a position, the car follows a **continuous trajectory (path)**, but with **discontinuous velocity**  
*Uncontrollable DOF makes the movement more complicated*

## Ratio of CDOF to the Total DOF

- The ratio of Controllable DOF (CDOF) to the Total DOF (TDOF) represents how easy is to control the robot movement
- **Holonomic** ( $CDOF=TDOF$ , the ratio is 1) – holonomic robot can control all of its DOF  
*E.g., Multirotor aerial vehicle can control each DOF*
- **Nonholonomic** ( $CDOF<TDOF$ , the ratio  $< 1$ ) – a nonholonomic robot has more DOF that it can control  
*E.g., a car*
- **Redundant** ( $CDOF>TDOF$ , the ratio  $> 1$ ) – a redundant robot has more ways of control



17 DOF



6 DOF Hexapod




24 TDOF, 18 CDOF Hexapod

## Locomotion

- **Locomotion** refers how the robot body moves from one location to another location  
*From the Latin Locus (place) and motion*
- The most typical effectors and actuators for ground robots are **wheels** and **legs**
- Most of the robots need to be **stable** to work properly
  - **Static stability** – a robot can stand, it can be static and stable  
*Biped robots are not statically stable, more legs make it easier. Most of the wheeled robots are stable.*
  - **Statically stable walking** – the robot is stable all the times  
*E.g., hexapod with tripod gait*
  - **Dynamic stability** – the body must actively balance or move to remain stable, the robots are called dynamically stable  
*E.g., inverse pendulum*

## Locomotion of Hexapod Walking Robot


- Let have hexapod robot with six identical legs each with 3 DOF
- Each leg consists of three parts called **Coxa**, **Femur**, and **Tibia**  

- The movement is a coordination of the **stance** and **swing** phases of the legs defined by the gait, e.g., tripod
- A **stride** is a combination of the leg movement with the foot tip on the ground (during the **stance phase**) and the leg movement in a particular direction (in the **swing phase**) within one **gait cycle**
- Various gaits can be created by different sequences of stance and swing phases
- $T_{Stance}$ ,  $T_{Swing}$ ,  $T_{Stride} = T_{Stance} + T_{Swing}$  defines the **duty factor**  
 $\beta = T_{Stance} / T_{Stride}$   
*Triod  $\beta = 0.5$*

## Control Architectures

- A single control rule may provide simple robot behaviour  
*Notice, controller can be feed-forward (open-loop) or feedback controller with vision based sensing*
- Robots should do more than just avoiding obstacles
- The question is “**How to combine multiple controllers together?**”
- **Control architecture** is a set of guiding principles and constraints for organizing the robot control system
  - Guidelines to develop the robotic system to behave as desired  
*It is not necessary to know control architectures for simple robotic demos and tasks. But it is highly desirable to be aware of architectures for complex robots*

## Locomotion – Wheel Robots



- One of the most simple wheeled robots is **differential drive** robot
  - It has two driven wheels on a common axis
  - It may use a castor wheel (or ball) for stability
  - It is nonholonomic robot  
*Omnidirectional robot is holonomic robot*



- $v_l$  and  $v_r$  are velocities along the ground of the left and right wheels, respectively
  - $\omega = \frac{v_r - v_l}{l}$ ,  $R = \frac{l}{2} \frac{v_l + v_r}{v_r - v_l}$
  - For  $v_l = v_r$ , the robot moves straight ahead  
*R is infinite*
  - For  $v_l = -v_r$ , the robot rotates in a place  
*R is zero*
  - Simple motion control can be realized in a turn-move like schema
- Further motion control using path following or trajectory following approaches with feedback controller based on the position of the robot to the path / trajectory

## Central Pattern Generator (CPG)

- **Central Pattern Generators (CPGs)** – are neural circuits to produce rhythmic patterns for various activities, i.e., locomotor rhythms to control a periodic movement of a particular body parts
- Salamander CPG with 20 amplitude-controlled phase oscillators




Auke Jan Ijspeert, Neural Networks, 2008

## Summary of the Lecture

## Locomotion – Legged Robots (Gaits)


- **Gait** is a way how a legged robot moves
- A gait defines the order how the individual legs lift and lower and also places of the foot tip on the ground
- Properties of gaits are: stability, speed, energy efficiency, robustness (how the gait can recover from some failures), simplicity (how complex is to generate the gait)
- A typical gait for hexapod walking robot is **tripod** which is stable as all the times at least three legs are on the ground

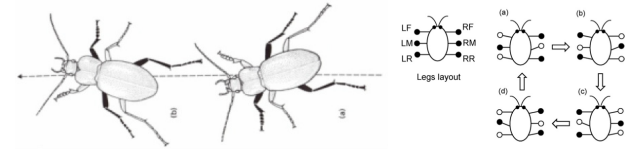

Gullan et al., The Insects: An outline of entomology, 2005 lida et al., Science Direct, 63, 2008

## Example of Rhythmic Pattern Oscillator

- One of the widely used oscillators is the **Matsuoka oscillator** model
- It is based on biological concepts of the extensor and flexor muscles
- The rhythmic patterns define the trajectory of the leg end point (foot tip)
- The coordinates of the foot tip can be utilized to compute the joint angles using the **Inverse Kinematics**



Matsuoka, K. (1985). Sustained oscillations generated by mutually inhibiting neurons with adaptation. Biological Cybernetics 52, 367–376

An example of simple CPG to control hexapod walking robot will be shown during the labs

## Topics Discussed

- Information about the Course
- Overview of robots, robotics, and challenges
  - Robot – Embodied software agent
  - Sensor, Controller, Actuators
  - Degrees of Freedom (DOF) and Controllable DOF
  - Mobile Robot Locomotion
  - Locomotion Gaits for Legged Robots
  - Central Pattern Generator

■ **Next: Robotic Paradigms and Control Architectures**