



Electromagnetic Field Theory 2

(fundamental relations and definitions)

Lukas Jelinek

lukas.jelinek@fel.cvut.cz
Department of Electromagnetic Field
Czech Technical University in Prague
Czech Republic

Ver. 2017/03/12



Maxwell('s)-Lorentz('s) Equations

$$\nabla \times \mathbf{H}(\mathbf{r}, t) = \mathbf{J}(\mathbf{r}, t) + \frac{\partial \mathbf{D}(\mathbf{r}, t)}{\partial t}$$

$$\nabla \times \mathbf{E}(\mathbf{r}, t) = -\frac{\partial \mathbf{B}(\mathbf{r}, t)}{\partial t}$$

$$\nabla \cdot \mathbf{B}(\mathbf{r}, t) = 0$$

$$\nabla \cdot \mathbf{D}(\mathbf{r}, t) = \rho(\mathbf{r}, t)$$

Equations of motion
for fields

Equation of motion
for particles

$$\mathbf{f}(\mathbf{r}, t) = \rho(\mathbf{r}, t) \mathbf{E}(\mathbf{r}, t) + \mathbf{J}(\mathbf{r}, t) \times \mathbf{B}(\mathbf{r}, t)$$

Interaction with materials

$$\mathbf{D}(\mathbf{r}, t) = \epsilon_0 \mathbf{E}(\mathbf{r}, t) + \mathbf{P}(\mathbf{r}, t)$$

$$\mathbf{B}(\mathbf{r}, t) = \mu_0 (\mathbf{H}(\mathbf{r}, t) + \mathbf{M}(\mathbf{r}, t))$$



Absolute majority of things happening around us is described by these equations

Boundary Conditions

$$\mathbf{n}(\mathbf{r}) \times [\mathbf{E}_1(\mathbf{r}, t) - \mathbf{E}_2(\mathbf{r}, t)] = 0$$

$$\mathbf{n}(\mathbf{r}) \times [\mathbf{H}_1(\mathbf{r}, t) - \mathbf{H}_2(\mathbf{r}, t)] = \mathbf{K}(\mathbf{r}, t)$$

$$\mathbf{n}(\mathbf{r}) \cdot [\mathbf{B}_1(\mathbf{r}, t) - \mathbf{B}_2(\mathbf{r}, t)] = 0$$

Normal
pointing to
region (1)

$$\mathbf{n}(\mathbf{r}) \cdot [\mathbf{D}_1(\mathbf{r}, t) - \mathbf{D}_2(\mathbf{r}, t)] = \sigma(\mathbf{r}, t)$$




Electromagnetic Potentials

Lorentz('s)
calibration

$$\nabla \cdot \mathbf{A}(\mathbf{r}, t) = -\sigma\mu\varphi(\mathbf{r}, t) - \varepsilon\mu \frac{\partial\varphi(\mathbf{r}, t)}{\partial t}$$

$$\mathbf{B}(\mathbf{r}, t) = \nabla \times \mathbf{A}(\mathbf{r}, t)$$
$$\mathbf{E}(\mathbf{r}, t) = -\nabla\varphi(\mathbf{r}, t) - \frac{\partial\mathbf{A}(\mathbf{r}, t)}{\partial t}$$



Wave Equation

$$\Delta \mathbf{A}(\mathbf{r}, t) - \sigma\mu \frac{\partial \mathbf{A}(\mathbf{r}, t)}{\partial t} - \varepsilon\mu \frac{\partial^2 \mathbf{A}(\mathbf{r}, t)}{\partial t^2} = -\mu \mathbf{J}_{\text{source}}(\mathbf{r}, t)$$



Material parameters are assumed
independent of coordinates



Poynting('s)-Umov('s) Theorem

$$-\int_V \mathbf{E} \cdot \mathbf{J}_{\text{source}} dV = \oint_S (\mathbf{E} \times \mathbf{H}) \cdot d\mathbf{S} + \int_V \sigma |\mathbf{E}|^2 dV + \frac{1}{2} \frac{\partial}{\partial t} \int_V (\varepsilon |\mathbf{E}|^2 + \mu |\mathbf{H}|^2) dV$$

Power passing the
bounding envelope

Energy storage

Power supplied
by sources

Heat losses

Energy balance in an electromagnetic system



Frequency Domain

$$\mathbf{F}(\mathbf{r}, t) \in \mathbb{R}$$

$$\mathbf{F}(\mathbf{r}, t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} \hat{\mathbf{F}}(\mathbf{r}, \omega) e^{j\omega t} d\omega$$

$$\hat{\mathbf{F}}(\mathbf{r}, \omega) \in \mathbb{C}$$

$$\hat{\mathbf{F}}(\mathbf{r}, \omega) = \int_{-\infty}^{\infty} \mathbf{F}(\mathbf{r}, t) e^{-j\omega t} dt$$

Time derivatives reduce to algebraic multiplication

$$\frac{\partial \mathbf{F}(\mathbf{r}, t)}{\partial t} \leftrightarrow j\omega \hat{\mathbf{F}}(\mathbf{r}, \omega)$$

$$\frac{\partial \mathbf{F}(\mathbf{r}, t)}{\partial r_\xi} \leftrightarrow \frac{\partial \hat{\mathbf{F}}(\mathbf{r}, \omega)}{\partial r_\xi}$$

Spatial derivatives are untouched

Frequency domain helps us to remove explicit time derivatives



Phasors

$$\hat{\mathbf{F}}(\mathbf{r}, -\omega) = \hat{\mathbf{F}}^*(\mathbf{r}, \omega) \quad \longrightarrow \quad \mathbf{F}(\mathbf{r}, t) = \frac{1}{\pi} \int_0^\infty \text{Re}[\hat{\mathbf{F}}(\mathbf{r}, \omega) e^{j\omega t}] d\omega$$

Reduced frequency domain representation



Maxwell('s) Equations – Frequency Domain

$$\nabla \times \hat{\mathbf{H}}(\mathbf{r}, \omega) = \hat{\mathbf{J}}(\mathbf{r}, \omega) + j\omega\epsilon\hat{\mathbf{E}}(\mathbf{r}, \omega)$$

$$\nabla \times \hat{\mathbf{E}}(\mathbf{r}, \omega) = -j\omega\mu\hat{\mathbf{H}}(\mathbf{r}, \omega)$$

$$\nabla \cdot \hat{\mathbf{H}}(\mathbf{r}, \omega) = 0$$

$$\nabla \cdot \hat{\mathbf{E}}(\mathbf{r}, \omega) = \frac{\hat{\rho}(\mathbf{r}, \omega)}{\epsilon}$$

We assume linearity of material relations



Wave Equation – Frequency Domain

$$\Delta \hat{\mathbf{A}}(\mathbf{r}, \omega) - j\omega\mu(\sigma + j\omega\varepsilon)\hat{\mathbf{A}}(\mathbf{r}, \omega) = -\mu\hat{\mathbf{J}}_{\text{source}}(\mathbf{r}, \omega)$$

Helmholtz('s) equation



Heat Balance in Time-Harmonic Steady State

Valid for general periodic steady state

$$\begin{aligned}-\int_V \langle \mathbf{E} \cdot \mathbf{J}_{\text{source}} \rangle dV &= \oint_S \langle \mathbf{E} \times \mathbf{H} \rangle \cdot d\mathbf{S} + \int_V \langle \sigma |\mathbf{E}|^2 \rangle dV \\ -\frac{1}{2} \int_V \operatorname{Re} [\hat{\mathbf{E}} \cdot \hat{\mathbf{J}}_{\text{source}}^*] dV &= \frac{1}{2} \oint_S \operatorname{Re} [\hat{\mathbf{E}} \times \hat{\mathbf{H}}^*] \cdot d\mathbf{S} + \frac{1}{2} \int_V \sigma |\hat{\mathbf{E}}|^2 dV\end{aligned}$$

Cycle mean

Valid for time-harmonic steady state



Plane Wave

Electric and magnetic fields
are orthogonal to
propagation direction

$$\hat{\mathbf{E}}(\mathbf{r}, \omega) = \mathbf{E}_0(\omega) e^{-jk\mathbf{n}\cdot\mathbf{r}}$$

$$\hat{\mathbf{H}}(\mathbf{r}, \omega) = \frac{k}{\omega\mu} [\mathbf{n} \times \mathbf{E}_0(\omega)] e^{-jk\mathbf{n}\cdot\mathbf{r}}$$

$$\mathbf{n} \cdot \mathbf{E}_0(\omega) = 0$$

$$\mathbf{n} \cdot \mathbf{H}_0(\omega) = 0$$

$$k^2 = -j\omega\mu(\sigma + j\omega\varepsilon)$$

Wave-number

Unitary vector representing
the direction of propagation

Electric and magnetic fields
are mutually orthogonal

The simplest wave solution of Maxwell('s) equations



Plane Wave Characteristics

$$k = \sqrt{-j\omega\mu(\sigma + j\omega\varepsilon)}$$

$$\operatorname{Re}[k] > 0; \operatorname{Im}[k] < 0$$

$$\lambda = \frac{2\pi}{\operatorname{Re}[k]}$$

$$v_f = \frac{\omega}{\operatorname{Re}[k]}$$

$$Z = \frac{\omega\mu}{k}$$

$$\delta = -\frac{1}{\operatorname{Im}[k]}$$

Vacuum

$$k = \frac{\omega}{c_0}$$

$$\operatorname{Re}[k] > 0; \operatorname{Im}[k] = 0$$

$$\lambda = \frac{c_0}{f}$$

$$v_f = c_0$$

$$Z = c_0\mu_0 = \sqrt{\frac{\mu_0}{\varepsilon_0}} \approx 377 \Omega$$

$$\delta \rightarrow \infty$$

General isotropic material



Cycle Mean Power Density of a Plane Wave

Power propagation coincides with phase propagation

$$\langle \mathbf{E}(\mathbf{r}, t) \times \mathbf{H}(\mathbf{r}, t) \rangle = \frac{1}{2} \frac{\text{Re}[k]}{\omega\mu} |\mathbf{E}_0(\omega)|^2 e^{2\text{Im}[k]\mathbf{n} \cdot \mathbf{r}} \mathbf{n}$$



Source Free Maxwell('s) Equations in Free Space

$$\nabla \times \mathbf{H}(\mathbf{r}, t) = \sigma(t) * \mathbf{E}(\mathbf{r}, t) + \varepsilon(t) * \frac{\partial \mathbf{E}(\mathbf{r}, t)}{\partial t}$$
$$\nabla \times \mathbf{E}(\mathbf{r}, t) = -\mu(t) * \frac{\partial \mathbf{H}(\mathbf{r}, t)}{\partial t}$$
$$\nabla \cdot \mathbf{H}(\mathbf{r}, t) = 0$$
$$\nabla \cdot \mathbf{E}(\mathbf{r}, t) = 0$$



$$|\mathbf{k}|^2 = k^2 = -j\omega\hat{\mu}(\omega)(\hat{\sigma}(\omega) + j\omega\hat{\varepsilon}(\omega))$$
$$\hat{\mathbf{E}}(\mathbf{k}, \omega) = \frac{\mathbf{k}}{\omega\hat{\varepsilon}(\omega) - j\hat{\sigma}(\omega)} \times \hat{\mathbf{H}}(\mathbf{k}, \omega)$$
$$\hat{\mathbf{H}}(\mathbf{k}, \omega) = -\frac{\mathbf{k}}{\omega\hat{\mu}(\omega)} \times \hat{\mathbf{E}}(\mathbf{k}, \omega)$$
$$\mathbf{k} \cdot \hat{\mathbf{E}}(\mathbf{k}, \omega) = 0$$
$$\mathbf{k} \cdot \hat{\mathbf{H}}(\mathbf{k}, \omega) = 0$$

$$\mathbf{F}(\mathbf{r}, t) = \frac{1}{(2\pi)^4} \int_{k,t} \hat{\mathbf{F}}(\mathbf{k}, \omega) e^{j(\mathbf{k} \cdot \mathbf{r} + \omega t)} d\mathbf{k} d\omega$$

Fourier's transform leads to simple algebraic equations



Spatial Wave Packet

$$|\mathbf{k}|^2 = k^2 = -j\omega\hat{\mu}(\omega)(\hat{\sigma}(\omega) + j\omega\hat{\varepsilon}(\omega)) \quad \rightarrow \quad \omega = \omega(|\mathbf{k}|)$$

This can be electric or magnetic intensity

$$\mathbf{F}(\mathbf{r}, t) = \frac{1}{(2\pi)^3} \int_{\mathbf{k}} \hat{\mathbf{F}}_0(\mathbf{k}) e^{j(\mathbf{k} \cdot \mathbf{r} + \omega(|\mathbf{k}|)t)} d\mathbf{k}$$
$$\mathbf{k} \cdot \hat{\mathbf{F}}_0(\mathbf{k}) = 0$$

General solution to free-space Maxwell's equations



Spatial Wave Packet in Vacuum

$$\omega(|\mathbf{k}|) = \pm c_0 |\mathbf{k}|$$

$$\mathbf{k} \cdot \hat{\mathbf{F}}_0^+(\mathbf{k}) = \mathbf{k} \cdot \hat{\mathbf{F}}_0^-(\mathbf{k}) = 0$$

$$\begin{aligned}\hat{\mathbf{F}}_0^-(\mathbf{k}) &= [\hat{\mathbf{F}}_0^+(-\mathbf{k})]^* \\ \hat{\mathbf{F}}_0^+(\mathbf{k}) &= [\hat{\mathbf{F}}_0^-(-\mathbf{k})]^*\end{aligned}$$

$$\mathbf{F}(\mathbf{r}, t) = \frac{1}{(2\pi)^3} \int_{\mathbf{k}} e^{j\mathbf{k} \cdot \mathbf{r}} [\hat{\mathbf{F}}_0^+(\mathbf{k}) e^{j c_0 t |\mathbf{k}|} + \hat{\mathbf{F}}_0^-(\mathbf{k}) e^{-j c_0 t |\mathbf{k}|}] d\mathbf{k}$$

$$\hat{\mathbf{F}}_0^+(\mathbf{k}) = \frac{1}{2} \int_{\mathbf{r}} \left[\mathbf{F}(\mathbf{r}, 0) + \frac{1}{j c_0 |\mathbf{k}|} \frac{\partial \mathbf{F}(\mathbf{r}, t)}{\partial t} \Big|_{t=0} \right] e^{-j\mathbf{k} \cdot \mathbf{r}} d\mathbf{r}$$

$$\hat{\mathbf{F}}_0^-(\mathbf{k}) = \frac{1}{2} \int_{\mathbf{r}} \left[\mathbf{F}(\mathbf{r}, 0) - \frac{1}{j c_0 |\mathbf{k}|} \frac{\partial \mathbf{F}(\mathbf{r}, t)}{\partial t} \Big|_{t=0} \right] e^{-j\mathbf{k} \cdot \mathbf{r}} d\mathbf{r}$$

The field is uniquely given by initial conditions



Spatial Wave Packet in Vacuum

$$\omega(|\mathbf{k}|) = \pm c_0 |\mathbf{k}|$$

$$\mathbf{E}(\mathbf{r}, t) = \frac{1}{(2\pi)^3} \int_{\mathbf{k}} e^{j\mathbf{k}\cdot\mathbf{r}} \left[\hat{\mathbf{E}}^+(\mathbf{k}) e^{j c_0 t |\mathbf{k}|} + \hat{\mathbf{E}}^-(\mathbf{k}) e^{-j c_0 t |\mathbf{k}|} \right] d\mathbf{k}$$


$$\mathbf{H}(\mathbf{r}, t) = -\frac{1}{(2\pi)^3} \int_{\mathbf{k}} e^{j\mathbf{k}\cdot\mathbf{r}} \frac{\mathbf{k}}{Z_0 |\mathbf{k}|} \times \left[\hat{\mathbf{E}}^+(\mathbf{k}) e^{j c_0 t |\mathbf{k}|} - \hat{\mathbf{E}}^-(\mathbf{k}) e^{-j c_0 t |\mathbf{k}|} \right] d\mathbf{k}$$

$$\mathbf{k} \cdot \hat{\mathbf{E}}^+(\mathbf{k}) = \mathbf{k} \cdot \hat{\mathbf{E}}^-(\mathbf{k}) = 0$$

Electric and magnetic field are not independent



Vacuum Dispersion

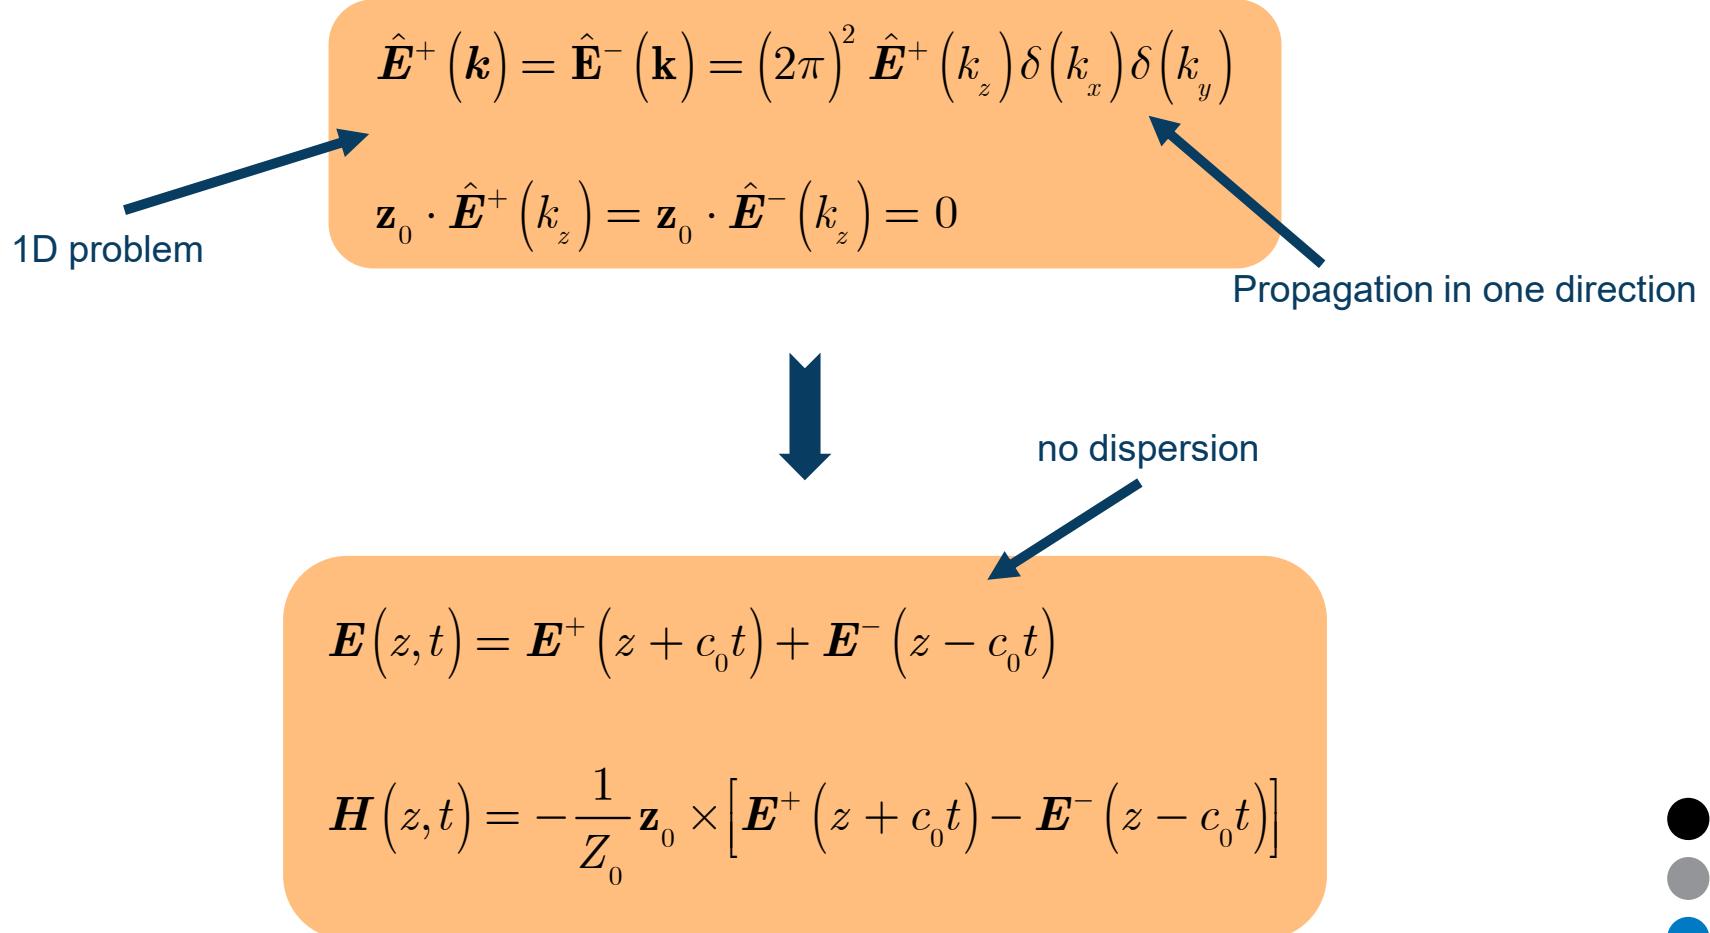

1D waves in vacuum propagate without dispersion

Vacuum Dispersion

In general this term does not represent translation

$$([x, y, z] \pm c_0 t)$$

$$\mathbf{E}(\mathbf{r}, t) = \frac{1}{(2\pi)^3} \int_{\mathbf{k}} e^{j\mathbf{k} \cdot \mathbf{r}} [\hat{\mathbf{E}}^+(\mathbf{k}) e^{jc_0 t |\mathbf{k}|} + \hat{\mathbf{E}}^-(\mathbf{k}) e^{-jc_0 t |\mathbf{k}|}] d\mathbf{k}$$

Waves propagating in all directions



2D and 3D waves in vacuum always disperse = change shape in time

Angular Spectrum Representation

$$\text{Im}[k_z] < 0$$

$$|\mathbf{k}|^2 = k^2 = -j\omega\hat{\mu}(\omega)(\hat{\sigma}(\omega) + j\omega\hat{\varepsilon}(\omega)) \implies k_z = \pm\sqrt{k^2 - k_x^2 - k_y^2}$$

$$\hat{\mathbf{H}}_0(k_x, k_y, \omega) = -\frac{\mathbf{k}}{Z|\mathbf{k}|} \times \hat{\mathbf{E}}_0(k_x, k_y, \omega)$$

$$\hat{\mathbf{E}}_0(k_x, k_y, \omega) = \mathcal{F}_{x,y,t}\{\mathbf{E}(x, y, 0, t)\}$$

$$\mathbf{E}(x, y, z < 0, t) = \frac{1}{(2\pi)^3} \int_{k_x, k_y, \omega} e^{j(k_x x + k_y y + \omega t)} \hat{\mathbf{E}}_0(k_x, k_y, \omega) e^{j\sqrt{k^2 - k_x^2 - k_y^2} z} dk_x dk_y d\omega$$

$$\mathbf{E}(x, y, z > 0, t) = \frac{1}{(2\pi)^3} \int_{k_x, k_y, \omega} e^{j(k_x x + k_y y + \omega t)} \hat{\mathbf{E}}_0(k_x, k_y, \omega) e^{-j\sqrt{k^2 - k_x^2 - k_y^2} z} dk_x dk_y d\omega$$

$$\mathbf{k} \cdot \hat{\mathbf{E}}_0 = 0$$

General solution to free-space Maxwell's equations



Propagating vs Evanescent Waves

$$k_x^2 + k_y^2 < k^2$$

These waves propagate and
can carry information to far distances

$$k_x^2 + k_y^2 > k^2$$

These waves exponentially decay in amplitude
and cannot carry information to far distances

Field picture losses its resolution with distance from the source plane



Paraxial Waves

$$\hat{\mathbf{E}}_0(k_x, k_y, \omega) \quad \xrightarrow{\hspace{1cm}} \quad k_x^2 + k_y^2 \ll k^2 \quad \xrightarrow{\hspace{1cm}} \quad \sqrt{k^2 - k_x^2 - k_y^2} \approx k - \frac{1}{2k}(k_x^2 + k_y^2)$$

$$\mathbf{E}(x, y, z > 0, t) = \frac{1}{(2\pi)^3} \int_{k_x, k_y, \omega} e^{j(k_x x + k_y y - kz + \omega t)} \hat{\mathbf{E}}_0(k_x, k_y, \omega) e^{j\frac{1}{2k}(k_x^2 + k_y^2)z} dk_x dk_y d\omega$$

$$\mathbf{k} \cdot \hat{\mathbf{E}}_0 = 0$$

$$\mathbf{z}_0 \cdot \hat{\mathbf{E}}_0 \approx 0$$

Propagates almost as a planewave



Gaussian Beam

$$\hat{\mathbf{E}}_{0\perp}(k_x, k_y, \omega) = \mathbf{A}_{0\perp} \pi w_0^2 e^{-\frac{1}{4}w_0^2(k_x^2+k_y^2)}$$



$$\mathbf{E}_\perp(x, y, z > 0, t) = \frac{1}{2\pi} \int_{\omega} \mathbf{A}_{0\perp} \frac{w_0}{w(z)} e^{-\frac{x^2+y^2}{w^2(z)}} e^{j\arctan\left(\frac{z}{z_R}\right)} e^{-j\frac{x^2+y^2}{w^2(z)}\left[\frac{z}{z_R}\right]} e^{j\omega\left[t-\frac{z}{c_0}\right]} d\omega$$

Gaussian profile
in amplitude

Paraxial
corrections

Planewave-like
propagation


Approximates radiation of sources large in comparison to wavelength



Gaussian Beam

Half-width of the beam

$$w(z) = w_0 \sqrt{1 + \left(\frac{z}{z_R}\right)^2}$$

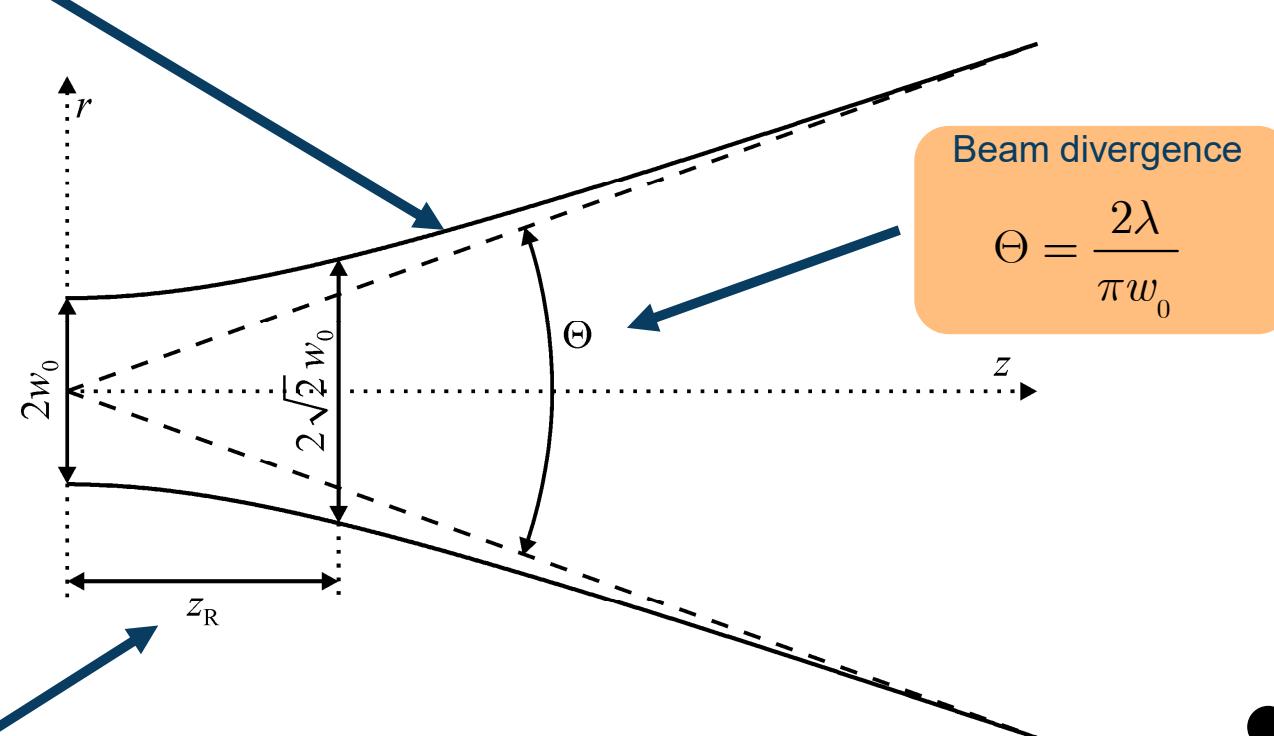

Beam divergence

$$\Theta = \frac{2\lambda}{\pi w_0}$$

Rayleigh's distance

$$z_R = \frac{1}{2} k w_0^2 = \frac{\pi w_0^2}{\lambda}$$



Gaussian Beam – Time-Harmonic Case

$$\langle \mathbf{S} \rangle = \frac{1}{2} \operatorname{Re} [\hat{\mathbf{E}}(x, y, z, \omega) \times \hat{\mathbf{H}}^*(x, y, z, \omega)] = \mathbf{z}_0 S_0 \frac{w_0^2}{w^2(z)} e^{-\frac{2\rho^2}{w^2(z)}}$$

86.5 % of power flows through the beam width

Power density at origin

$$w(z) = w_0 \sqrt{1 + \left(\frac{z}{z_R}\right)^2}$$



Material Dispersion

Causality requirement
 $\varepsilon(\tau) = 0, \tau < 0$

Stability requirement
 $\varepsilon(\tau) \rightarrow 0, \tau \rightarrow \infty$

$$\mathbf{D}(\mathbf{r}, t) = \int_{-\infty}^{\infty} \varepsilon(\tau) \mathbf{E}(\mathbf{r}, t - \tau) d\tau$$

$$\mathbf{B}(\mathbf{r}, t) = \int_{-\infty}^{\infty} \mu(\tau) \mathbf{H}(\mathbf{r}, t - \tau) d\tau$$

$$\mathbf{J}(\mathbf{r}, t) = \int_{-\infty}^{\infty} \sigma(\tau) \mathbf{E}(\mathbf{r}, t - \tau) d\tau$$



$$\hat{\mathbf{D}}(\mathbf{r}, \omega) = \hat{\varepsilon}(\omega) \hat{\mathbf{E}}(\mathbf{r}, \omega)$$

$$\hat{\mathbf{B}}(\mathbf{r}, \omega) = \hat{\mu}(\omega) \hat{\mathbf{H}}(\mathbf{r}, \omega)$$

$$\hat{\mathbf{J}}(\mathbf{r}, \omega) = \hat{\sigma}(\omega) \hat{\mathbf{E}}(\mathbf{r}, \omega)$$



Even single planewave undergoes time dispersion when materials are present

Lorentz's Dispersion Model

$$\frac{\partial^2 \mathbf{P}(t)}{\partial t^2} + \Gamma \frac{\partial \mathbf{P}(t)}{\partial t} + \omega_0^2 \mathbf{P}(t) = \varepsilon_0 \omega_p^2 \mathbf{E}(t)$$


$$\varepsilon(\omega) = \varepsilon_0 \left(1 + \frac{\omega_p^2}{\omega_0^2 - \omega^2 + j\omega\Gamma} \right)$$

$$\varepsilon(\omega) = \varepsilon_0 \left(1 + \sum_i \frac{\omega_{p,i}^2}{\omega_{0,i}^2 - \omega^2 + j\omega\Gamma_i} \right)$$

Dispersion model able to describe vast amount of natural materials



Drude's Dispersion Model

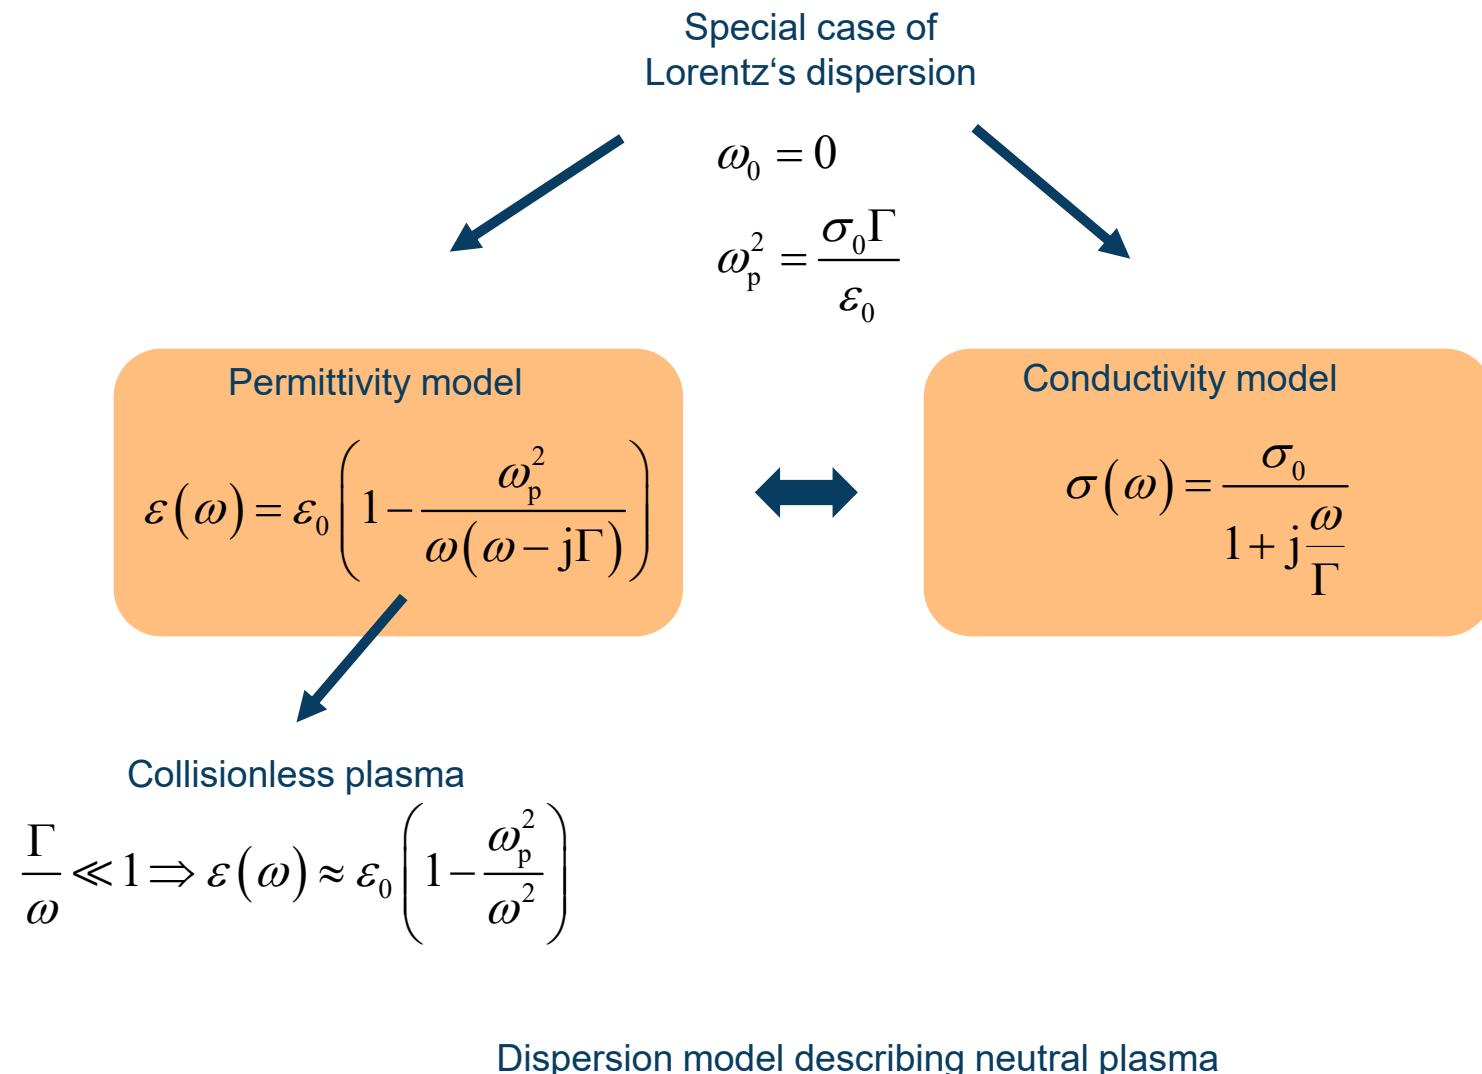

Appleton Dispersion Model

$$\frac{\partial^2 \mathbf{P}(t)}{\partial t^2} + \omega_c \frac{\partial \mathbf{P}(t)}{\partial t} \times \mathbf{z}_0 = \epsilon_0 \omega_p^2 \mathbf{E}(t)$$

Cyclotron frequency Direction of magnetization Plasma frequency

$\hat{\epsilon} \neq \hat{\epsilon}^T$
Propagation in opposite directions is not the same

$$\hat{\epsilon} = \epsilon_0 \begin{bmatrix} 1 - \frac{\omega_p^2}{\omega^2 - \omega_c^2} & \frac{-j\omega_c \omega_p^2}{\omega(\omega^2 - \omega_c^2)} & 0 \\ \frac{j\omega_c \omega_p^2}{\omega(\omega^2 - \omega_c^2)} & 1 - \frac{\omega_p^2}{\omega^2 - \omega_c^2} & 0 \\ 0 & 0 & 1 - \frac{\omega_p^2}{\omega^2} \end{bmatrix}$$

Dispersion model describing magnetized neutral plasma



Propagation in Appleton Dispersion Model

$$\hat{\mathbf{E}} = \mathbf{E}_0 e^{jk_z z}$$

$$\mathbf{k} \cdot \mathbf{E}_0 = 0$$

Planewave propagation
along magnetization



Fundamental modes
are circularly polarized
waves

$$\frac{k_z^2}{k_0^2} = 1 - \frac{\omega_p^2}{\omega(\omega \pm \omega_c)}$$

$$\hat{\mathbf{E}}_x = \mp j \hat{\mathbf{E}}_y$$

Dispersion model describing magnetized neutral plasma



Radiation

Microscopic
charge velocity

$$\frac{\partial \mathbf{v}(t)}{\partial t} \neq 0$$

Macroscopic
current density

$$\frac{\partial \mathbf{J}(r,t)}{\partial t} \neq 0$$

Any surface
circumscribing
the sources

$$\int_{-\infty}^{\infty} \oint_S (\mathbf{E}(r,t) \times \mathbf{H}(r,t)) \cdot d\mathbf{S} dt \neq 0$$


Only accelerating charges can radiate



Time-Harmonic Electric Dipole

$$\hat{P}(\mathbf{r}, \omega) = \mathbf{z}_0 p_z(\omega) \delta(x) \delta(y) \delta(z)$$

$\rho(\mathbf{r}, \omega) \approx 0$

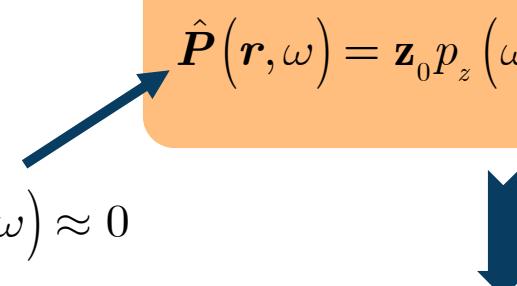

$$\hat{\mathbf{A}}(\mathbf{r}, \omega) = j Z_0 k^2 (r_0 \cos \theta - \theta_0 \sin \theta) p_z(\omega) \frac{e^{-jkr}}{4\pi kr}$$

$$\hat{\mathbf{H}}(\mathbf{r}, \omega) = c_0 k^3 \varphi_0 \sin \theta \left(-1 + \frac{j}{kr} \right) p_z(\omega) \frac{e^{-jkr}}{4\pi kr}$$


$$\hat{\mathbf{E}}(\mathbf{r}, \omega) = Z_0 c_0 k^3 \left[2 r_0 \cos \theta \left(\frac{j}{kr} + \frac{1}{k^2 r^2} \right) + \theta_0 \left(-1 + \frac{j}{kr} + \frac{1}{k^2 r^2} \right) \sin \theta \right] p_z(\omega) \frac{e^{-jkr}}{4\pi kr}$$

Elementary source of radiation



Time-Harmonic Electric Dipole - Field Zones

$$\hat{\mathbf{E}}(\mathbf{r}, \omega) = Z_0 c_0 k^3 \left[2\mathbf{r}_0 \cos \theta \left(\frac{\mathbf{j}}{kr} + \frac{1}{k^2 r^2} \right) + \theta_0 \left(-1 + \frac{\mathbf{j}}{kr} + \frac{1}{k^2 r^2} \right) \sin \theta \right] p_z(\omega) \frac{e^{-jkr}}{4\pi kr}$$

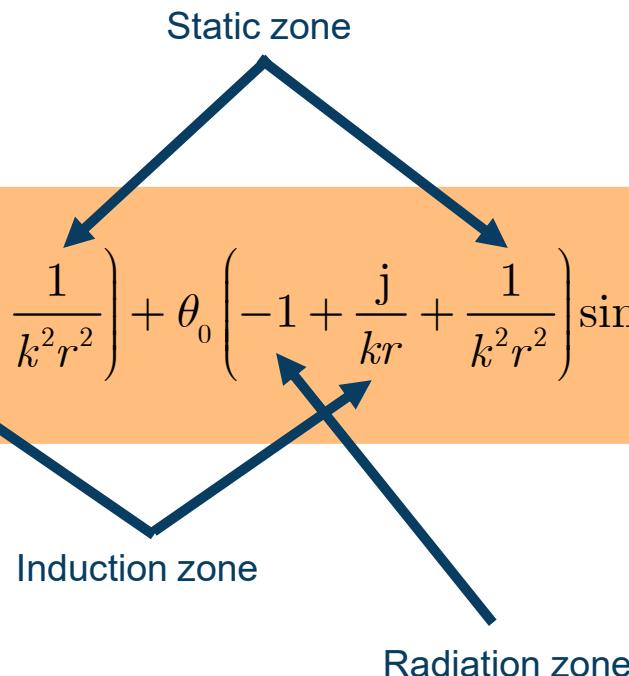

Static, quasi-static and fully dynamic terms all appear in the formula

Time-Harmonic Electric Dipole - Radiation Zone

$$\hat{\mathbf{P}}(\mathbf{r}, \omega) = \mathbf{z}_0 p_z(\omega) \delta(x) \delta(y) \delta(z)$$



$$\hat{\mathbf{E}}_\infty(\mathbf{r}, \omega) \approx -Z_0 c_0 k^3 \theta_0 p_z(\omega) \frac{e^{-jk\mathbf{r}}}{4\pi kr} \sin \theta$$
$$\hat{\mathbf{H}}_\infty(\mathbf{r}, \omega) \approx \frac{1}{Z_0} \mathbf{r}_0 \times \hat{\mathbf{E}}_\infty(\mathbf{r}, \omega)$$

$$\mathbf{r}_0 \cdot \hat{\mathbf{E}}_\infty \approx 0$$

$$\langle \mathbf{S}_\infty \rangle = \frac{1}{2} \operatorname{Re} [\hat{\mathbf{E}}_\infty \times \hat{\mathbf{H}}_\infty^*] = \frac{1}{2Z_0} \left| \hat{\mathbf{E}}_\infty(\mathbf{r}, \omega) \right|^2 \mathbf{r}_0$$

Radiated power [W]

$$P_{\text{rad}} = \frac{c_0^2 Z_0 k^4}{12\pi} |p_z(\omega)|^2$$



Farfield has a planewave-like geometry

Time-Harmonic Electric Dipole – General Case

$$\hat{\mathbf{P}}(\mathbf{r}, \omega) = \hat{\mathbf{p}}(\omega) \delta(\mathbf{r} - \mathbf{r}')$$



$$\mathbf{R} = \mathbf{r} - \mathbf{r}'$$

$$\hat{\mathbf{H}}(\mathbf{r}, \omega) = c_0 k^3 \left(\frac{\mathbf{R}}{R} \times \hat{\mathbf{p}} \right) \left(1 + \frac{1}{jkR} \right) \frac{e^{-jkR}}{4\pi kR}$$

$$\hat{\mathbf{E}}(\mathbf{r}, \omega) = Z_0 c_0 k^3 \left[-\frac{\mathbf{R}}{R} \times \left(\frac{\mathbf{R}}{R} \times \hat{\mathbf{p}} \right) + \left(3 \frac{\mathbf{R}}{R} \left[\hat{\mathbf{p}} \cdot \frac{\mathbf{R}}{R} \right] - \hat{\mathbf{p}} \right) \left(\frac{1}{k^2 R^2} + \frac{j}{kR} \right) \right] \frac{e^{-jkR}}{4\pi kR}$$

$$R = |\mathbf{r} - \mathbf{r}'|$$

Elementary source of radiation



General Radiator

$$\hat{\mathbf{J}}(\mathbf{r}, \omega), \mathbf{J}(\mathbf{r}, t)$$



time
retardation

$$\hat{\mathbf{A}}(\mathbf{r}, \omega) = \frac{\mu_0}{4\pi} \int_{V'} \hat{\mathbf{J}}(\mathbf{r}', \omega) \frac{e^{-jk_0 R}}{R} dV'$$

$$\mathbf{A}(\mathbf{r}, t) = \frac{\mu_0}{4\pi} \int_{V'} \frac{\mathbf{J}\left(\mathbf{r}', t - \frac{R}{c_0}\right)}{R} dV'$$

$$R = |\mathbf{r} - \mathbf{r}'|$$



Superposition of dipole fields

Field in Radiation Zone – General Case FD

$$kR \gg 1 \quad \wedge \quad r \gg r'$$



$$\hat{\mathbf{A}}_{\infty}(\mathbf{r}, \omega) \approx \frac{\mu_0}{4\pi} \frac{e^{-jk_r}}{r} \int_{V'} \hat{\mathbf{J}}(\mathbf{r}', \omega) e^{jk_0 \mathbf{r}_0 \cdot \mathbf{r}'} dV'$$

$$\hat{\mathbf{H}}_{\infty}(\mathbf{r}, \omega) \approx -\frac{j\omega}{Z_0} \mathbf{r}_0 \times \hat{\mathbf{A}}_{\infty}(\mathbf{r}, \omega)$$

$$\hat{\mathbf{E}}_{\infty}(\mathbf{r}, \omega) \approx j\omega \mathbf{r}_0 \times (\mathbf{r}_0 \times \hat{\mathbf{A}}_{\infty}(\mathbf{r}, \omega))$$

$$\langle \mathbf{S}_{\infty} \rangle = \frac{1}{2Z_0} \omega^2 \left| \mathbf{r}_0 \times \hat{\mathbf{A}}_{\infty}(\mathbf{r}, \omega) \right|^2 \mathbf{r}_0$$

$$\hat{\mathbf{E}}_{\infty} \approx -Z_0 (\mathbf{r}_0 \times \hat{\mathbf{H}}_{\infty})$$



Farfield has a planewave-like geometry

Field in Radiation Zone – General Case TD

$$\boxed{\begin{aligned}\mathbf{A}_\infty(\mathbf{r}, t) &\approx \frac{\mu}{4\pi r} \int_{V'} \mathbf{J}\left(\mathbf{r}', t - \frac{r}{c_0} + \frac{\mathbf{r}_0 \cdot \mathbf{r}'}{c_0}\right) dV' \\ \mathbf{H}_\infty(\mathbf{r}, t) &\approx -\frac{1}{Z_0} \mathbf{r}_0 \times \dot{\mathbf{A}}_\infty(\mathbf{r}, t) \\ \mathbf{E}_\infty(\mathbf{r}, t) &\approx \mathbf{r}_0 \times (\mathbf{r}_0 \times \dot{\mathbf{A}}_\infty(\mathbf{r}, t)) \\ \mathbf{S}_\infty &\approx \frac{1}{Z_0} |\mathbf{r}_0 \times \dot{\mathbf{A}}_\infty(\mathbf{r}, t)|^2 \mathbf{r}_0\end{aligned}}$$



Farfield has a planewave-like geometry



Radiation Zone = Rays

$$\hat{\mathbf{A}}_{\infty}(\mathbf{r}, \omega) \approx \frac{\mu_0}{4\pi} \frac{e^{-jk_0 r}}{r} \int_{V'} \hat{\mathbf{J}}(\mathbf{r}', \omega) e^{jk_0 \mathbf{r}_0 \cdot \mathbf{r}'} dV'$$



4D Fourier('s) transform

$$\mathbf{A}_{\infty}(\mathbf{r}, t) \approx \mathcal{F}_{\omega}^{-1} \left\{ \frac{\mu_0}{4\pi} \hat{\mathbf{J}}(-k_0 \mathbf{r}_0, \omega) \frac{e^{-jk_0 r}}{r} \right\}$$



Farfield is made of propagating planewaves



Lukas Jelinek

lukas.jelinek@fel.cvut.cz
Department of Electromagnetic Field
Czech Technical University in Prague
Czech Republic

Ver. 2017/03/12

