A0B17MTB - Matlab Part #3 Miloslav Čapek B2-626, Prague



miloslav.capek@fel.cvut.cz

Filip Kozák, Viktor Adler, Pavel Valtr

Department of Electromagnetic Field

Learning how to ...

	ResTable.data1(
	<pre>PsoData.cond{crt}(spr,2),</pre>
	<pre>PsoData.cond{crt}(spr,3)</pre>
Indexing) =
	<pre>bestPersDim(bestGlobNum, crt);</pre>

Size and type of data

Output format

Matlab Editor



6.3.201611:28

2

A0B17MTB: Part #3 Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz

Indexing in Matlab

- now we know all the stuff necessary to deal with indexing in Matlab
- mastering <u>indexing is crucial</u> for efficient work with Matlab!!!
- up to now we have been working with entire matrices, quite often we need, however, to access individual emenets of matrices

- two ways of accessing matrices / vectors are distinguished
 - access using round brackets ,, () "
 - refers to position of elements in a matrix
 - access using square brackets ,, [] "
 - refers to content of a matrix



600 s

- **Indexing in Matlab**
 - let's consider following triplet of matrices
 - execute individual commands and find out their meaning
 - start from inner part of the commands
 - note the meaning of the keyword end

•	note the	meaning	UI	un	CK	Cyv	volu end		(11	10	12	11)
	(5)	(1	. /	้า	3	Λ	5)					
	$\begin{pmatrix} -5 \\ -5 \end{pmatrix}$							NT	22	24	26	28
$\mathbf{N}_1 =$	0	$\mathbf{N}_2 = \begin{bmatrix} 2 \end{bmatrix}$						$\mathbf{N}_3 =$	33	36	39	42
	(5)		2 .	3	5	7	11)					
$\mathbf{N}_1 =$	(5)		2 (3	5	7	11)		44			

>> N1 = (-5:5:5)';N2 = [1:5;2:2:10;primes(11)];N3 = (1:4)'*(11:14);

>> N1	>> N2(1, 3)	>> N3(2:3, [1 1 1]) % like repmat
>> N1(1:3)	>> N2(3, 1)	>> N3(2:3, ones(1,3))
>> N1([1 2 3])	>> N2(1, end)	>> N3(2:3, ones(3,1))
>> N1(1:2)	>> N2(end, end)	>> N3([N2(2,1:2)/2 4], [2 3])
>> N1([1 3])	>> N2(1, :)	>> N3([1 end], [1:4 1:2:end])
>> N1([1 3]')	>> N2(1, :)'	>> N3(:, :, 2) = magic(4)
>> N1([1 3])'	>> N2(:, 2)	>> N3([1 3], 3:4, 3) = \dots
>> N1([1; 3])	>> N2(:, 3:end)	[1/2 -1/2; pi*ones(1, 2)]

6. 3. 2016 11:28

A0B17MTB: Part #3



Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz


4

5

Indexing in Matlab

- remember the meaning of end and the usage of colon operator ":"
- try to:
 - flip the elements of the vector N1
 - without using fliplr / flipud functions
 - select only the even columns of N2
 - select only the odd rows of N3
 - 2nd, 4th and 5th column of **N2**'s 2nd row
 - create matrix **A** (4x3) containing numbers 1 to 12 (row-wise, from left to right)

A0B17MTB: Part #3









420 s

300 s


- Indexing in Matlab
 - calculate cumulative sum S of a vector x consisting of integers from 1 to 20
 - search Matlab help to find appropriate function (*cumulative sum*)

$$\mathbf{x} = \begin{pmatrix} 1 & 2 & \dots & 20 \end{pmatrix}$$

 $S = \begin{pmatrix} 1 & 1+2 & \dots & 1+2\dots+20 \end{pmatrix}$

 calculate cumulative sum L of even elements of the vector x

• what is the value of the last element of the vector **L**?

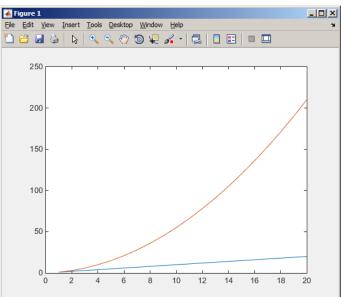



Indexing in Matlab

150 s

• which one of the following returns corner elements of a matrix A (10x10)?

```
>> A([1,1], [end,end]) % A.
>> A({[1,1], [1,end], [end,1], [end,end]}) % B.
>> A([1,end], [1,end]) % C.
>> A(1:end, 1:end) % D.
```



Deleting elements of a matrix

• empty matrix is a crucial point for deleting matrix elements

>> T = []

- we want to:
 - remove 2nd row of matrix **A**

$$>> A(2, :) = []$$

- remove 3rd column of matrix **A**
- remove 1st, 2nd a 5th column of matrix A

>> A(:, 3) = []

>> A(:, [1 2 5]) = []



Adding and replacing elements of a matrix

- we want to replace:
 - 3^{rd} column of matrix **A** (of size M×N) by a vector **x** (length N)

>> A(:, 3) = x

• 2nd, 4th a 5th row of matrix **A** by three rows of matrice **B** (number of columns of both **A** and **B** is the same)

>> $A([2 \ 4 \ 5], :) = B(1:3, :)$

- we want to swap
 - 2nd row of matrix **A** and 5th column of matrix **B** (number of columns of **A** is the same as number of rows of **B**)

>> A(2, :) = B(:, 5)

• remember that always the size of matrices have to match!



A0B17MTB: Part #3
Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz

6.3.201611:28

Deleting, adding and replacing matrices

420 s

- which of the following deletes the first and the last column of matrix A (6×6)?
 - create your own matrix and give it a try
 - >> A[1, end] = 0 % A.
 >> A(:, 1, end) = [] % B.
 >> A(:, [1:end]) = [] % C.
 >> A(:, [1 end]) = [] % D.
- replace the 2nd, 3rd and 5th row of matrix **A** by the first row of matrix **B**
 - assume the number of columns of matrices **A** and **B** is the same
 - consider the case where **B** has more columns than **A**
 - what happens if **B** has less columns than **A**?



A0B17MTB: Part #3

Matrix creation, element replacement

300 s

• create following 3D array

$$\mathbf{M}(:,:,1) = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix}, \quad \mathbf{M}(:,:,2) = \begin{pmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{pmatrix}, \quad \mathbf{M}(:,:,3) = \begin{pmatrix} 2 & 0 & 0 \\ 0 & 3 & 0 \\ 0 & 0 & 5 \end{pmatrix}$$
$$\begin{array}{c} 1 & 0 & 0 & 2 & 0 & 0 \\ 0 & 1 & 0 & 0 & 3 & 0 \\ 0 & 0 & 1 & 1 & 1 & 0 & 5 \\ \hline 1 & 1 & 1 & 1 & 1 \\ \hline 1 & 1 & 1 & 1 & 1 \\ \end{array}$$


• replace elements in the first two rows and columns of the first sheet of the array (i.e. the matrix [1 0; 0 1]) with NaN elements



11

Linear indexing

- elements of an array of arbitrary number of dimensions and arbitrary size can be referred to using single index
 - indexing takes place along the main dimension (column-wise) than along the secondary dimension (row-wise) etc.

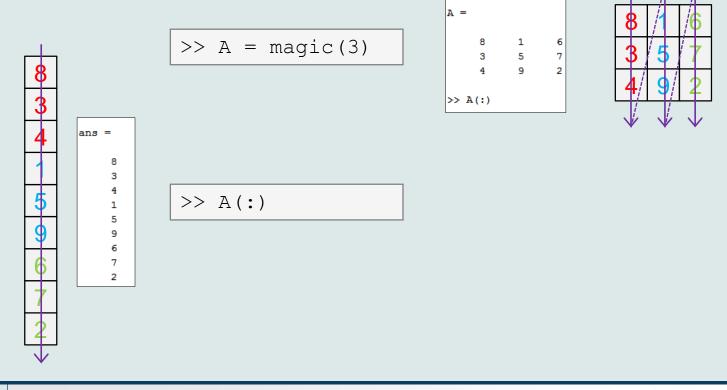

6. 3. 2016 11:28


A0B17MTB: Part #3


12

Linear indexing - application

- let's consider following matrix:
 - matrix: >> MAT = ones(7);
 - we set all the red-highlighted elements to zero:

```
>> MAT(2:2:end) = 0
>> imagesc(MAT);
```

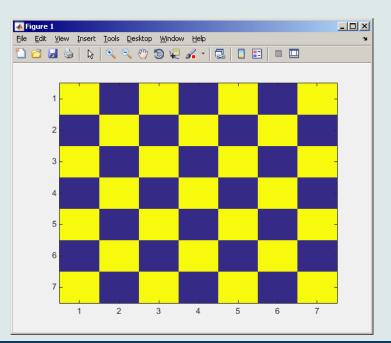




6. 3. 2016 11:28




A0B17MTB: Part #3
Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz

Linear indexing - ind2sub, sub2ind

- ind2sub: recalculates linear index to subscript corresponding to size and dimension of the matrix
 - applicable to an array of arbitrary size and dimension

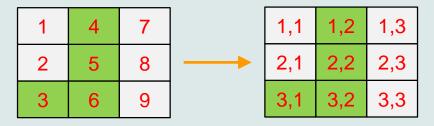

- sub2ind: recalculates subscripts to linear index
 - applicable to an array of arbitrary size and dimension

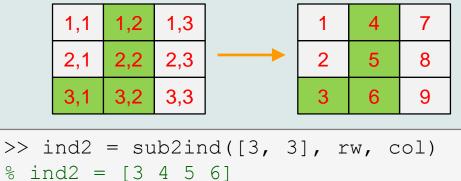



A0B17MTB: Part #3

Linear indexing

300 s

- for a two-dimensional array, find a formula to calculate linear index from position given by row (row) and col (column)
 - check with a matrix A of size 4×4 , where

•
$$row = [2, 4, 1, 2]$$

- col = [1, 2, 2, 4]
- and therefore
 - ind = [2, 8, 5, 14]

>> A = zeros(4); >> A(:) = (1:16)



Function who, whos

- function who lists all variables in Matlab Workspace
 - wide variety of options
- function whos lists the variable names + dimension, size and data type of the variables or displays content of a file
 - wide variety of options

>> whos('-file', 'matlab.mat');



Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz

A0B17MTB: Part #3

16

Function what, which, delete

• function what lists names of all Matlab files in the current folder

>> Wt = what;

- funkce which is able to localize (in this order)
 - .m/.p/Simulink function
 - Method of Java class
 - Workspace variable
 - arbitrary file, if present in the current folder

```
>> which sin
built-in (C:\Program Files\MATLAB\R2013a\toolbox\matlab\elfun\@double\sin) % double method
```

- function delete deletes
 - files
 - handle objects (e.g. graphical objects)

Functions cd, pwd, dir

- function cd changes current folder
 - lists current folder when called without a parameter
 - "cd ..." jumps up one directory, "cd /" jumps up to root
- function pwd identifies current folder
- function dir lists current folder content
- for other functions (mkdir, rmdir, ...) see Matlab Help



Function prefdir

• folder containing preferences, history, and layout files

```
>> folder = prefdir
>> cd(folder);
```

• it is recommended to do not edit any file!



Function memory, ver

function memory displays information on how much memory is available and how much the MATLAB software is currently using

>>	memory	
>>	M = memory	

>> memorv

-		
Maximum possible array:	4408 MB (4.622e+09 bytes) *	
Memory available for all	arrays: 4408 MB (4.622e+09 bytes) *	
Memory used by MATLAB:	696 MB (7.294e+08 bytes)	
Physical Memory (RAM):	3534 MB (3.705e+09 bytes)	

>> ver

>> V = ver

- Limited by System Memory (physical + swap file) available. *
- function ver displays license information
 - Matlab version
 - License number
 - List of toolboxes and their version
- if you need to know the vesion of Matlab only, use version



Format of command line output >> pi ans = 3.1416 • up to now we have been using basic setup >> sin(1.1) • Matlab offers number of other options ans = • use format setting 0.8912 • output format does not change neither the computation accuracy nor the

accuracy of stored result (eps, realmax, realmin, ... still apply)

setting	format description
short	fixed 4 decimal points are displayed
long	15 decimal points for double accuracy, 7 decimal points for single accuracy
shortE	floating-point format (scientific notation)
longE	-//-
bank	Two decimal points only (euro – cents)
rat	Matlab attempts to display the result as a fraction
and others	note.: omitting setting parameter restors default setup



6. 3. 2016 11:28

21

Format of command line output

240 s

- try following output format settings
 - each format is suitable for different type of problem

```
>> s = [5 1/2 1/3 10*pi sqrt(2)];
>> format long; s
>> format rat; s
>> format bank; s
>> format hex; s
>> format +; s
>> format; s
```

- there exist other formats with slight differences
 - check doc format
- later, we will learn how to use formatted conversion into strings (commands sprintf a fprintf)

List of ASCII characters

- ASCII characters used in Matlab
 - All characters to be found on EN keyboard

[ALT + 91	matrix definition, indexing
]	ALT + 93	-//-
{	ALT + 123	cell elements indexing
}	ALT + 125	-//-
Ø	ALT + 64	handle (symbolic math)
>	ALT + 62	relation operator
<	ALT + 60	-//-
\	ALT + 92	Matrix division
	ALT + 124	logical operator
~	ALT + 126	-//-
^	ALT + 94	power

• for more see: http://www.asciitable.com/



6. 3. 2016 11:28

Launching external programs

- rarely used
- external programs are launched using the exclamation mark "!"
 - the whole line after the "!" is processed as operation system command

>> !calc

• if you don't want to interrupt execution of Matlab by the launch, add "&"

```
>> !calc &
>> !notepad notes.txt &
```

• it is possible to run Matlab with several ways

>> doc matlab Windows
>> doc matlab UNIX



6. 3. 2016 11:28

Work with files using the prompt

- try the following
 - copy & paste line by line, observe what happens
 - be careful when editing the commands!!!

```
>> mkdir('My_experiment');
>> cd('My_experiment');
>> this_directory = pwd;
>> our_file = 'pathdef.m';
>> our_data = fullfile(matlabroot, 'toolbox', 'local', our_file);
>> copyfile(our_data, this_directory);
>> new_file = 'my_demo.txt';
>> movefile(our_file, new_file);
>> !write my_demo.txt
```




Exercise #1

• consider signal: $s(t) = \sqrt{2\pi} \sin(2\omega_0 t) + n(\mu, \sigma), \quad \omega_0 = \pi,$ where the mean and standard deviation of normal distribution *n* is:

mu
$$\mu=0, \sigma=1$$
 sigma

- create time dependence of the signal spanning N = 5 periods of the signal using V = 40 samples per period
- one period: T = 1: $t \in [k, k+1], k \in \mathbb{Z}^0$ (choose k equal for instance to 0)
- the function $n(\mu, \sigma)$ has Matlab syntax:

>> n = mu + sigma*randn(1, N*V)

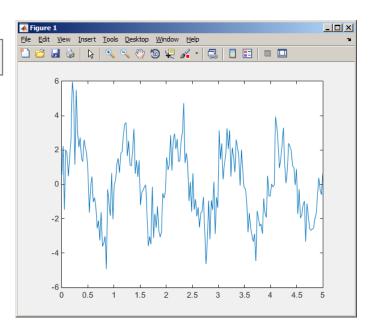



600 s

A0B17MTB: Part #3

26

9

• apply threshold function to generated signal from the previous exercise to limit its maximum and minimum value:

 $\left[\mathbf{c} \quad \leftrightarrow \mathbf{c}(t) < \mathbf{c} \right]$

- use function input parame
- use the follo

>> close all; >> plot(t, s t); >> stem(t, sp t,

A0B17MTB: Part #3

Matlab Editor

- it is often wanted to evaluate certain sequence of commands repeatedly
 ⇒ utilization of Matlab scripts (plain ACSII coding)
- the best option is to use Matlab Editor
 - to be opened using:

>> edit

- or in Matlab < R2012a: Start \rightarrow Desktop Tools \rightarrow Editor
- a script is a sequence of statements that we have been up to now typing in the command line
 - all the statements are executed one by one on the launch of the script
 - the script operates with global data in Matlab Workspace
 - suitable for quick analysis and solving problems involving multiple statements
- there are specific naming conventions for scripts (and also for functions as we see later)



6.3.201611:28

Script execution, m-files

- to execute script:
 - F5 function key in Matlab Editor
 - Current Folder \rightarrow select script \rightarrow context menu \rightarrow Run
 - Current Folder \rightarrow select script \rightarrow F9
 - From the command line:

>> script_name

- Scripts are stored as so called m-files
 - .m
 - caution: if you have Mathematica installed, the .m files may be launched by Mathematica



elmag.or


Matlab Editor, < R2012a

	and Mendaus II.du		
Edit Text Go Cell Tools Debug Des			
ila\Matlab_mfiles\TCMapp4.1a\TCM_;			\Matlab_mfiles\TCMapp4.1a\mbin\resQuv.m
<pre>%* TCM_afs_executor: T % -solver- % % INPUT/OUTPUT variabl % SAME as TCM_pfs_e% % % TCM_pfs_executor ver % ver. 1.0a (12.3.2 % ver. 1.0b (6.6.20 % new features % ver. 1.0c (8.8.20 % new field pT % % % Last update: 8.8. % % Notes: % A) SAME as TCM_pfs_e% % B) fIndexes(1,:) ~ s % fIndexes(2,:) ~ a % % Author: Miloslav Čap % See also TCM_pfs_executor </pre>	sion history: 011-6.6.2011) 11) (Z-matrices complex saved to the res 11) CMout.zmatrix ts been added (for 2011	eigenvectors 94 - 95 96 97 98 99 100 101 102 99 90 100 101 102 99 100 101 102 02 calculation) 105 106 107 108 109 109 109 109 109 109 100 101 102 103 104 105 106 107 108 109 109 100 101 102 103 104 105 106 107 108 109 109 100 101 102 103 104 105 106 107 108 109 100 101 102 103 104 105 106 107 108 109 109 100 101 105 106 107 108 109 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 106 107 108 109 100 107 108 109 100 106 111 112 112 113 114 115 116 117 117 117 117 117 117 117	<pre>end % pTCMout data: eigenNumbers = real(pTCMout.sorted.numbers); eigenVectors = real(pTCMout.sorted.vectors); meshStruct = pTCMout.freqList; p = meshStruct.p; t = meshStruct.t; tCenter = meshStruct.trCenter; tArea = meshStruct.trArea; clear pTCMout; % Allocation %</pre>
<pre>% TO DO: % (1) nová inte</pre>	ligence navrhování samplů (!!!)	120 - 121 - 122	<pre>fprintf(1,'Frequency sample: %3.0f\n',i); fprintf(1, '</pre>
<pre>>> edit >> edit my</pre>	% launch « Fcel % open nev		Scel' in the current directory
<pre>- pTCMres = {}; % alokac - timePath = [num2str(tt</pre>	<pre>e (event. později doplněno) (3)) '.' num2str(tt(2)) '.' num2str(tt num2str(tt(5))]; % alokace data a čas </pre>	(1)) '_' 129 - 130 -	q0 = zeros(size(t,2),modes); % Hustota náboje (divergence J) thisFreq = frInd(i); for j = 1:modes

30

elmag

Matlab Editor, ≥ R2012a

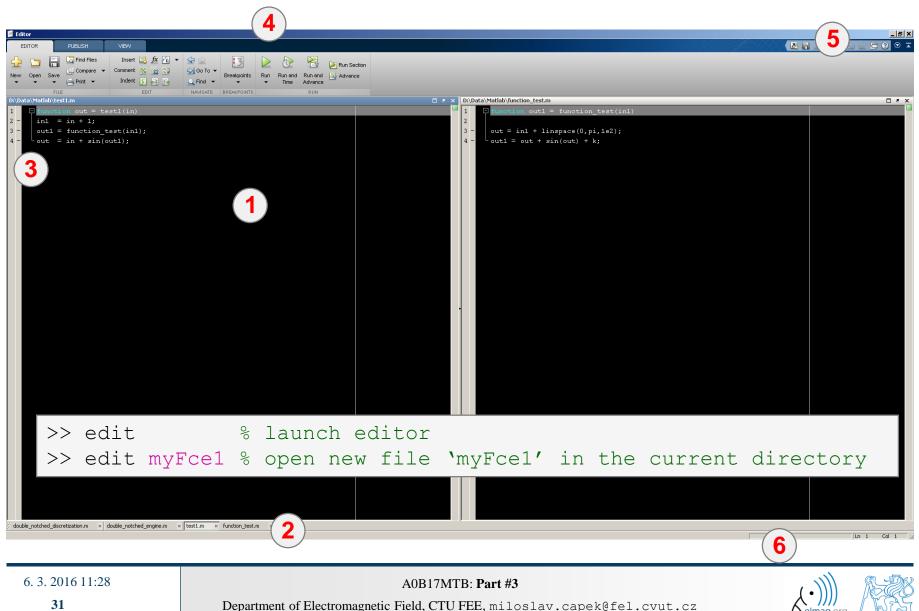

Useful shortcuts for Matlab Editor


key	meaning
CTRL + Pg. UP	switch among all open m-files - one direction
CTRL + Pg. DOWN	- other direction
CTRL + R	adds '%' at the beginning of the selected lines, "comment lines"
CTRL + T	removes '%' from selected lines
F5	execute current script / function
CTRL + S	save current file (done automatically after pressing F5)
CTRL + HOME	jump to the beginning of file
CTRL + END	jump to the end of file
CTRL + \rightarrow / \leftarrow	jump word-by-word or expression-by-expression to the right / left
CTRL + W	close current file
CTRL + O	activates open file dialog box (drag and drop technique also available)
CTRL + F	find / replace dialog box
CTRL + G	"go to", jumps to the indicated line number
CTRL + D	open m-file of the function at the cursor's position
CTRL + I	indention of block of lines corresponding to key words (for / while, if / switch - case)
F1	open context help related to the function at position of cursor



120 s

- open Matlab Editor and prepare to work with a new script, call it signal1.m, for instance
- use signal generation and limiting from one of the previous slides as the body of the script
- Save the script in the current (or your own) folder
- try to execute the script (F5)

Matlab Editor

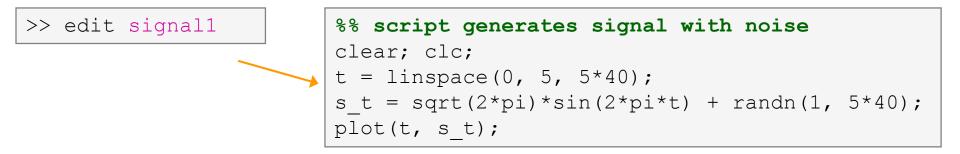

note: from now on, the code inside scripts will be shown without leading ">>"



Useful functions for script generation

- function disp displays value of a variable in Command Window
 - without displaying variable's name and the equation sign "="
 - Can be combined with s text (more on that later)
 - more often it is advantageous to use more complicated but robust function sprintf

```
>> a = 2^13-1;
b = [8*a \ 16*a];
                        a = 2^{13-1};
                                                             a = 2^{13-1};
                                                                                            >> a = 2^{13-1};
b
                        b = [8*a \ 16*a];
                                                             b = [8*a \ 16*a];
                                                                                             = [8*a 16*a];
                                                      VS.
                                                                                            disp(b);
b =
                                                             disp(b);
                        b
                                                                                                  65528
                                                                                                           131056
     65528
              131056
```

- function input is used to enter variables
 - if the function is terminated with an error, the input request is repeated

```
A = input('Enter parameter A: ');
```

• It is possible to enter strings as well:

str = input('Enter String str: ', 's');


```
>> A = input('Enter parametr A: ');
Enter parametr A: 10.153
>> A = input('Enter string str: ', 's');
Enter string str: this is a test
>> whos
 Name
            Size
                             Bytes Class
                                               Attributes
 A
            1x14
                                28
                                    char
            1x1
                                 8
                                    double
 ans
```



600 s

Matlab Editor – Exercise

- create a script to calculate compound interest*
 - the problem can be described as :



where P is regular repayment of debt A, paid n-times per year in the course of k years with interest rate r (decimal number)

- create a new script and save it
- at the beginning delete variables and clear Command Window
- implement the formula first, then proceed with inputs (input) and outputs (disp)
- Try to vectorize the code, e.g. for various values of *P*, *n* or *k*
- Check your results (pro A = 1000, n = 12, k = 15, r = 0.1 is P = 10.7461)


*interest from the prior period is added to principal



6.3.201611:28

Matlab Editor – Exercise

• try to vectorize the code, both for *r* and *k*



- use scripts for future work with Matlab
 - bear in mind, however, that parts of the code can be debugged using command line



Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz

A0B17MTB: Part #3

6.3.201611:28

Linear indexing

600 s

• let's consider following matrix:

>> A = magic(4);

• use linear indexing so that only the element with the highest value in each row of A was left (all other values set to 0); call the new matrix B

>> B = zeros(size(A)); >> % complete ...

Useful functions for script generation

- function keyboard stops execution of the code and gives control to the keyboard
 - the function is widely used for code debugging as it stops code execution at the point where doubts about the code functionality exist

K>>

- keyboard status is indicated by K>> (K appears before the prompt)
- The keyboard mode is terminated by return
- function pause halts code execution,
 - pause(x) halts code execution for x seconds

% code; code; code;
pause;

- see also: echo, waitforbuttonpress
 - special purpose functions



A0B17MTB: Part #3

Matlab Editor – Exercise


360 s

- modify the script for compound interest calculation in the way that
 - values *A* and *n* are entered from the command line (function input)
 - test the function keyboard (insert it right after parameter input)
 - is it possible to use keyboard mode to change the parameters inserted by input?
 - arrange for exiting the keyboard (K>>) mode, use return
 - interrupt the script before displaying results (function pause)
 - note the warning "*Paused*" in the bottom left part of main Matlab window

Script commenting

• MAKE COMMENTS!!

- important / complicated parts of code
- description of functionality, ideas, change of implementation

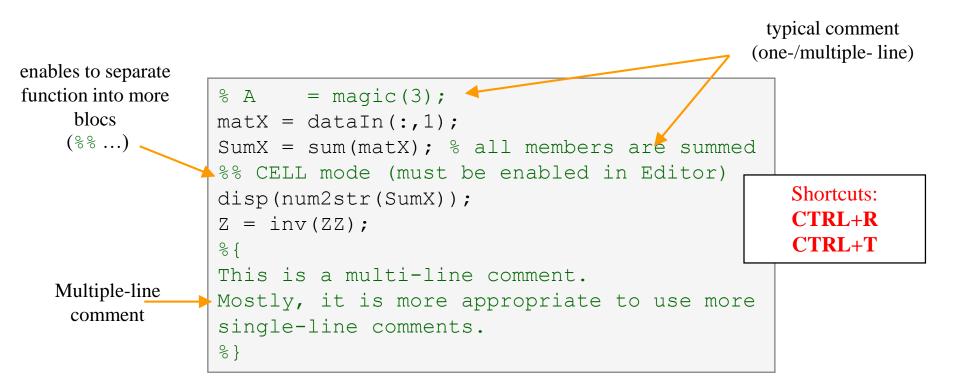

A0B17MTB: Part #3



6.3.201611:28

When not making comments...

```
edgTotal = MeshStruct.edgTotal;
                               RHO P
                                         = zeros(3,9,edqTotal);
                                         = zeros(3,9,edqTotal);
                               RHO M
                             🖵 for m = 1:edqTotal
                                   RHO P(:,:,m) = repmat(MeshStruct.Rho Plus1(:,m),[1 9]);
no
                                   RHO M(:,:,m) = repmat(MeshStruct.Rho Minus1(:,m),[1 9]);
                               end
one
                               Ζ
                                         = zeros(edgTotal, edgTotal) + 1j*zeros(edgTotal, edgTotal);
                             [ for p = 1:MeshStruct.trTotal
will
                                   Plus = find(MeshStruct.TrianglePlus - p == 0);
                                   Minus = find (MeshStruct.TriangleMinus - p == 0);
understand!
                                         = MeshStruct.trCenter9 - ...
                                               repmat(MeshStruct.trCenter(:,p), [1 9 MeshStruct.trTotal]);
                                   R
                                        = sqrt(sum(D.*D));
                                        = \exp(-K^*R)./R;
                                   q
                                   qP = q(:,:,MeshStruct.TrianglePlus);
                                        = g(:,:,MeshStruct.TriangleMinus);
                                   αM
                                         = sum(gP) - sum(gM);
                                   Fi
                                         = FactorFi.*reshape(Fi,edgTotal,1);
                                   ZF
                                   for k = 1:length(Plus)
                                       n
                                              = Plus(k);
                                       RP
                                              = repmat(MeshStruct.Rho Plus9(:,:,n),[1 1 edgTotal]);
                                       RPi
                                              = repmat(MeshStruct.Rho Minus9(:,:,n),[1 1 edgTotal]);
                                              = sum(gP.*sum(RP.*RHO_P)) + sum(gM.*sum(RP.*RHO_M));
                                       A
                                              = FactorA.*reshape(A,edgTotal,1);
                                       Z1
                                       Z(:,n) = Z(:,n) + MeshStruct.edgLength(n)*(Z1+ZF);
                                   end
                                   for k = 1:length(Minus)
                                              = Minus(k);
                                       n
                                       RP
                                              = repmat(MeshStruct.Rho Minus9(:,:,n),[1 1 edgTotal]);
                                       RPi
                                              = repmat(MeshStruct.Rho Plus9(:,:,n),[1 1 edqTotal]);
                                              = sum(gP.*sum(RP.*RHO_P)) + sum(gM.*sum(RP.*RHO_M));
                                       A
                                              = FactorA.*reshape(A,edqTotal,1);
                                       Z1
                                       Z(:,n) = Z(:,n) + MeshStruct.edqLenqth(n)*(Z1-ZF);
                                   end
                               end
```



6.3.201611:28

A0B17MTB: Part #3


Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz

edit	open Matlab Editor	•
disp, pause	display result in the command line, terminate script execution	•
keyboard, return, input	enables user to enter script being executed, value input request	•
who, what, whos, which	information on variables, files, folders	•
cd, pwd, dir	change directory, list folder	•
memory, ver	available memory information, version of Matlabu and toolboxes	•
format, delete	command line display format, delete file / objects	•





• generate vector containing following sequence

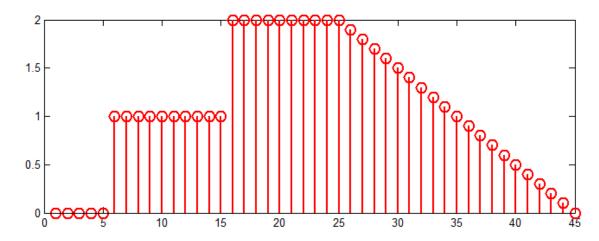


- note the x axis (interval, number of samples)
- split the problem into several parts to be solved separately
- several ways how to solve the problem
- use stem(x) instead of plot(x) for plotting
- try to generate the same signal beginning with zero ...





• generate vector containing following sequence

• one of possible solutions:

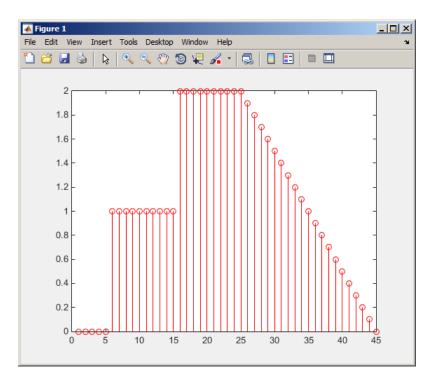





6. 3. 2016 11:28

A0B17MTB: Part #3
Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz



• consider following signal:

$$s(t) = \sqrt{2\pi} \sin(2\omega_0 t) + n(\mu, \sigma)$$


where the mean of normal distribution $n(\mu, \sigma)$ is $\mu=0$ (mu) and standard deviation $\sigma=1$ (sigma). Matlab syntax of *n* is:

n = mu + sigma*randn(1, N*V)

- create signal within time interval $\langle 5;10 \rangle$ so that N = 5 periods of the signal is depicted using V = 40 samples per period.
- use the code in the following slide and correct errors in the code. Correct solution will be presented during next lecture.





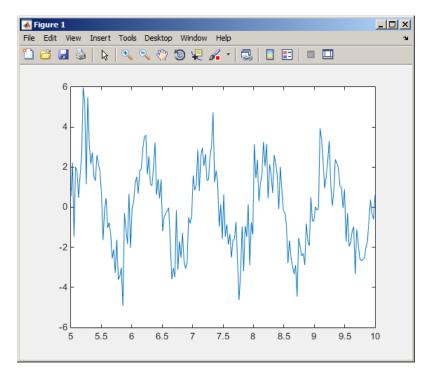

• Correct solution depicts:



A0B17MTB: Part #3
Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz



• reflection coeff. S_{11} of a one-port device of impedance Z is given by :


$$S_{11} = 10\log_{10}\left(\left|\frac{Z-Z_0}{Z+Z_0}\right|^2\right),$$

where $Z_0 = 50 \Omega$ and Z = R + jX.

- calculate and depict the dependence of S_{11} for $R = 30 \Omega$ and X on the $<1, 10^3>$ interval with 100 evenly spaced point in logarithmic scale
- Use the code below and correct errors in the code. Correct solution will be presented during next lecture.



• Correct solution results in the following:

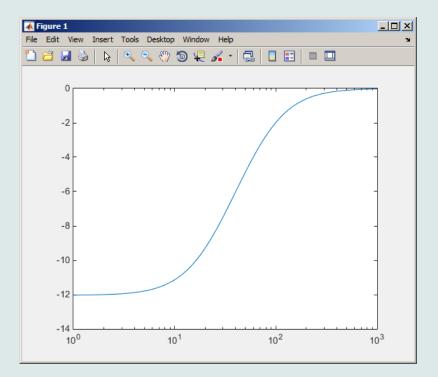




6. 3. 2016 11:28

A0B17MTB: Part #3

Department of Electromagnetic Field, CTU FEE, miloslav.capek@fel.cvut.cz

Thank you!

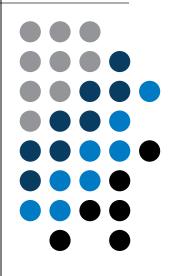

ver. 5.1 (06/03/2016) Miloslav Čapek, Pavel Valtr miloslav.capek@fel.cvut.cz Pavel.Valtr@fel.cvut.cz



Apart from educational purposes at CTU, this document may be reproduced, stored or transmitted only with the prior permission of the authors. Document created as part of A0B17MTB course.