

# Middleware and Web Services

## Lecture 8: HATEOAS, Scalability and Description

doc. Ing. Tomáš Vitvar, Ph.D.

tomas@vitvar.com • @TomasVitvar • http://vitvar.com



Czech Technical University in Prague  
Faculty of Information Technologies • Software and Web Engineering • http://vitvar.com/courses/mdw



Evropský sociální fond  
Praha & EU: Investujeme do vaší budoucnosti

Modified: Mon Dec 12 2011, 22:25:17  
Humla v0.2.2

## REST Core Principles

- REST architectural style defines constraints
  - *if you follow them, they help you to achieve a good design, interoperability and scalability.*
- Constraints
  - *Client/Server*
  - *Statelessness*
  - *Cacheability*
  - *Layered system*
  - *Uniform interface*
- Guiding principles
  - *Identification of resources*
  - *Representations of resources and self-descriptive messages*
  - *Hypermedia as the engine of application state (HATEOAS)*

## Overview

- **HATEOAS**
  - *Stateful vs. Stateless*
  - *Links and Preconditions*
- Scalability
- Description

## HATEOAS


- HATEOAS = Hypertext as the Engine for Application State
  - *The REST core principle*
  - **Hypertext**
    - *Hypertext is a representation of a resource with **links***
    - *A link is an URI of a resource*
    - *Applying an access to a resource via its link = state transition*
- Statelessness
  - *A service does not use a memory to remember a state*
  - *HATEOAS enables stateless implementation of services*

## Overview

- HATEOAS
  - *Stateful vs. Stateless*
  - *Links and Preconditions*
- Scalability
- Description


## Stateful server

- Sessions to store the application state
  - See a *state management* and a *stateful public process*
  - *The app uses a server memory to remember the app's state*
  - *when server restarts, the app state is lost*

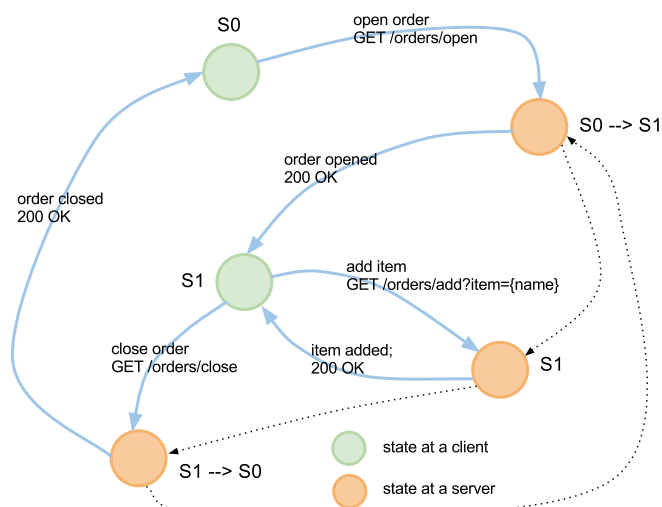

## Stateless server

- HTTP and hypermedia to transfer the app state
  - Does not use a server memory to remember the app state
  - State transferred between a client and a service via HTTP metadata and resources' representations

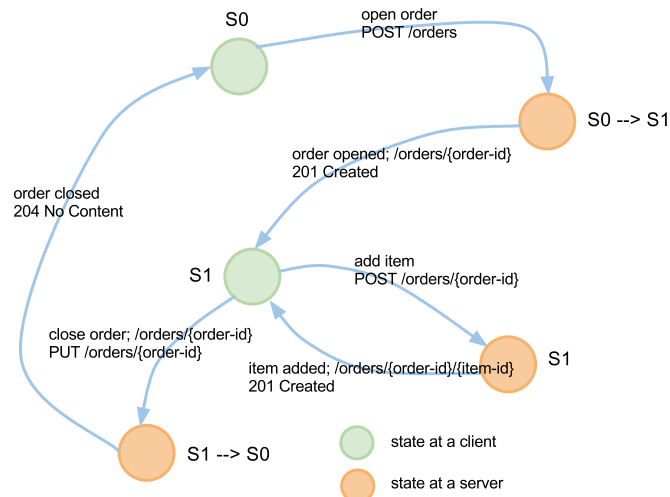

## Persistent Storage and Session Memory


- Persistent Storage
  - Contains app data
  - Data is serialized into resource representation formats
  - All sessions may access the data via resource IDs
  - Note
    - Our simple examples implement a storage in a server memory!
- Session Memory
  - Server memory that contains a state of the app
  - A session may only access its session memory
  - Access through cookies
  - Note
    - A session memory may be implemented via a persistent storage (such as in GAE)

## Overview

- HATEOAS
  - *Stateful vs. Stateless*
  - *Links and Preconditions*
- Scalability
- Description

## Link

- Service operation
  - *Applying an access to a link (GET, PUT, POST, DELETE)*
  - *Link: HTTP method + resource URI + optional link semantics*
- Example: **getOrder** and **addItem**

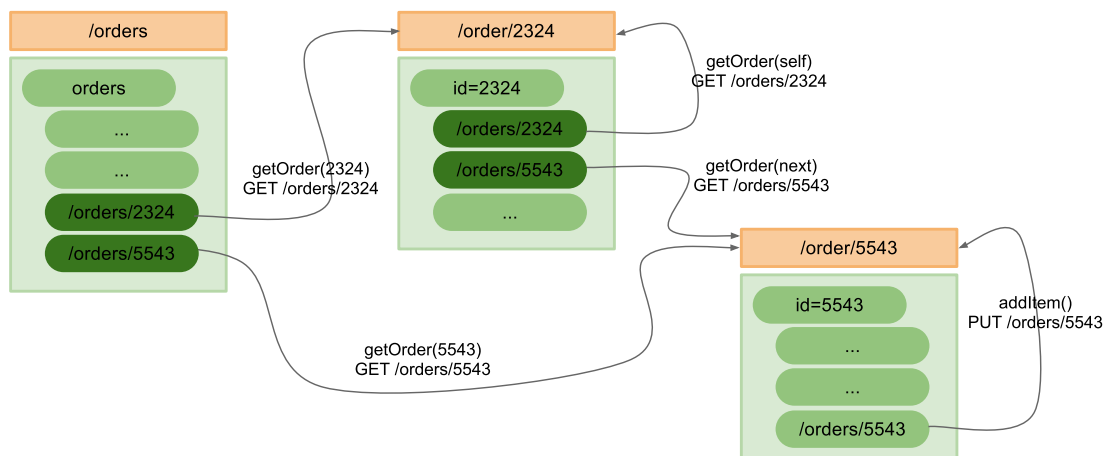

## Atom Links

- Atom Syndication Format

- XML-based document format; Atom feeds
- Atom links becoming popular for RESTful applications

```
1 | <order a:xmlns="http://www.w3.org/2005/Atom" xmlns="...">
2 |   <a:link
3 |     rel="next"
4 |     href="http://company.com/orders/5543"
5 |     type="application/xml"/>
6 |   <customer>Tomas</customer>
7 |   <items>...</items>
8 | </order>
```

- Link structure

**rel** – name of the link

~ semantics of an operation behind the link

**href** – URI to the resource described by the link

**type** – media type of the resource the link points to

## Link Semantics

- Standard **rel** values

- Navigation: **next**, **previous**, **self**
- Does not reflect a HTTP method you can use

- Extension **rel** values

- You can use **rel** to indicate a semantics of an operation
- Example: add item, delete order, update order, etc.
- A client associates this semantics with an operation it may apply at a particular state
- The semantics should be defined by using an URI

```
1 | <order a:xmlns="http://www.w3.org/2005/Atom" xmlns="...">
2 |   <id>2324</id>
3 |   <a:link rel="http://company.com/op/addItem"
4 |     href="http://company.com/orders/2324"/>
5 |   <a:link rel="http://company.com/op/deleteOrder"
6 |     href="http://company.com/orders/2324"/>
7 | </order>
```

## Pagination

- Dividing a resource into a number of pages
  - A client retrieves a resource in pages to optimize interactions
  - Example: `/orders?page={startPage}&size={numberReturned}`
  - A client needs to ask for (or have default values for) a start page and a number of orders to return (must have a pre-defined knowledge)
- Example `/orders` resource:

```
1 | <orders a:xmlns="http://www.w3.org/2005/Atom" xmlns="...">
2 |   <order>...</order>
3 |   <a:link rel="next" href="http://company.com/orders?page=2&size=10"/>
4 |   <a:link rel="last" href="http://company.com/orders?page=10&size=10"/>
5 | </orders>
```

- client does not need to remember which page of orders it is viewing

## Link Headers


- An alternative to Atom links in resource representations
  - links defined in HTTP Link header, Web Linking IETF spec [🔗](#)
  - They have the same semantics as Atom Links
  - Example:

```
> HEAD /orders HTTP/1.1
< Content-Type: application/xml
< Link: <http://company.com/orders/?page=2&size=10>; rel="next"
< Link: <http://company.com/orders/?page=10&size=10>; rel="last"
```

- Advantages
  - no need to get the entire document
  - no need to parse the document to retrieve links
  - use HTTP HEAD only

## Preconditions and HATEOAS

- **Precondition**
  - Recall *preconditions and effects* from Lecture 4.
    - A conditions that must hold in a state before an operation can be executed.
- **Preconditions in HATEOAS**
  - Service in a current state generates only valid transitions that it includes in the representation of the resource.
  - Transition logic is realized at the server-side

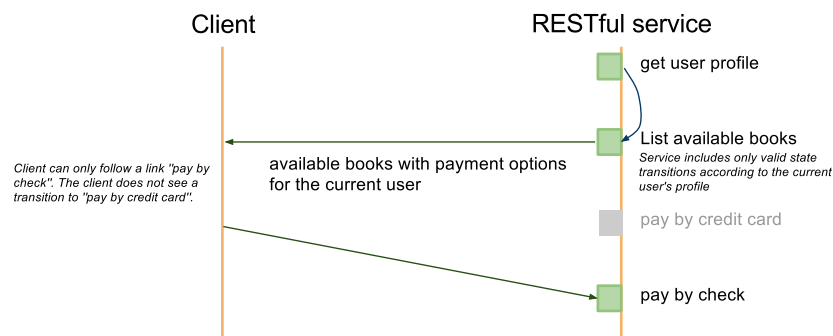

## Advantages

- **Location transparency**
  - only "entry-level" links published to the World
  - other links within documents can change without changing client's logic
  - HATEOAS may reflect current user's rights in the app
- **Loose coupling**
  - no need for a logic to construct the links
  - Clients know to which states they can move via links



## Overview

- HATEOAS
- **Scalability**
  - *Caching and Revalidation*
  - *Concurrency Control*
- Description


## Scalability

- Need for scalability
  - *Huge amount of requests on the Web every day*
  - *Huge amount of data downloaded*
- Some examples
  - *Google, Facebook: 5 billion API calls/day*
  - *Twitter: 3 billions of API calls/day (75% of all the traffic)*
    - *50 million tweets a day*
  - *eBay: 8 billion API calls/month*
  - *Bing: 3 billion API calls/month*
  - *Amazon WS: over 100 billion objects stored in S3*
- Scalability in REST
  - *Caching and revalidation*
  - *Concurrency control*

## Overview

- HATEOAS
- Scalability
  - *Caching and Revalidation*
  - *Concurrency Control*
- Description

## Caching

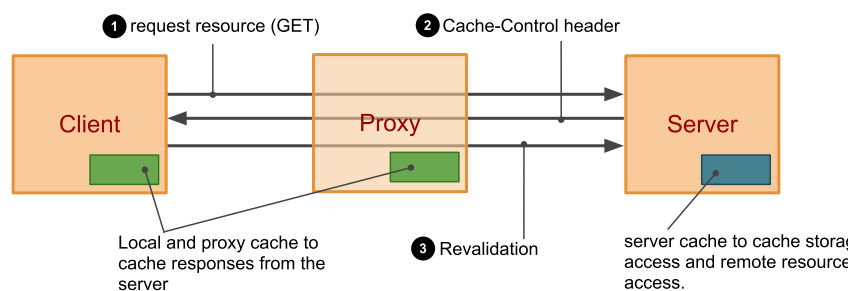

- Your service should cache:
  - *anytime there is a static resource*
  - *even there is a dynamic resource*
    - *with chances it updates often*
    - *you can force clients to always revalidate*
- three steps:
  - *client GETs the resource representation*
  - *server controls how it should cache through **Cache-Control** header*
  - *client revalidates the content via conditional GET*

## Cache Headers

- **Cache-Control** response header
  - controls over local and proxy caches
  - **private** – no proxy should cache, only clients can
  - **public** – any intermediary can cache (proxies and clients)
  - **no-cache** – the response should not be cached. If it is cached, the content should always be revalidated.
  - **no-store** – can cache but should not store persistently. When a client restarts, content is lost
  - **no-transform** – no transformation of cached data; e.g. compressions
  - **max-age**, **s-maxage** a time in seconds how long the cache is valid; **s-maxage** for proxies
- **Last-Modified** and **ETag** response headers
  - Content last modified date and a content entity tag
- **If-Modified-Since** and **If-None-Match** request headers
  - Content revalidation (conditional GET)

## Example Date Revalidation

- Cache control example:

```
> GET /orders HTTP/1.1
> ...

< HTTP/1.1 200 OK
< Content-Type: application/xml
< Cache-Control: private, no-store, max-age=200
< Last-Modified: Sun, 7 Nov 2011, 09:40 CET
<
< ...data...
```

  - only client can cache, must not be stored on the disk, the cache is valid for 200 seconds.
- Revalidation (conditional GET) example:
  - A client revalidates the cache after **200** seconds.

```
> GET /orders HTTP/1.1
> If-Modified-Since: Sun, 7 Nov 2011, 09:40 CET

< HTTP/1.1 304 Not Modified
< Cache-Control: private, no-store, max-age=200
< Last-Modified: Sun, 7 Nov 2011, 09:40 CET
```

## Entity Tags

- Signature of the response body
  - A hash such as MD5
  - A sequence number that changes with any modification of the content
- Types of tag
  - Strong ETag: reflects the content bit by bit
  - Weak ETag: reflects the content "semantically"
    - The app defines the meaning of its weak tags

- Example content revalidation with ETag

```
< HTTP/1.1 200 OK
< Cache-Control: private, no-store, max-age=200
< Last-Modified: Sun, 7 Nov 2011, 09:40 CET
< ETag: "4354a5f6423b43a54d"

> GET /orders HTTP/1.1
> If-None-Match: "4354a5f6423b43a54d"

< HTTP/1.1 304 Not Modified
< Cache-Control: private, no-store, max-age=200
< Last-Modified: Sun, 7 Nov 2011, 09:40 CET
< ETag: "4354a5f6423b43a54d"
```

## Design Suggestions

- Composed resources use weak ETags
  - For example `/orders`
    - a composed resource that contains a summary information
    - changes to an order's items will not change semantics of `/orders`
  - It is usually not possible to perform updates on these resources
- Non-composed resources use strong ETags
  - For example `/orders/{order-id}`
  - They can be updated
- Further notes
  - Server should send both **Last-Modified** and **ETag** headers
  - If client sends both **If-Modified-Since** and **If-None-Math**, **ETag** validation takes preference

## Weak ETag Example

- App specific, `/orders` resource example

```
1  {
2      "orders" :
3      [
4          { "id"      : 2245,
5            "customer" : "Tomas",
6            "descr"   : "Stuff to build a house.",
7            "items"   : [...] },
8          { "id"      : 5546,
9            "customer" : "Peter",
10           "descr"   : "Things to build a pipeline.",
11           "items"   : [...] }
12     ]
13 }
```

- Weak ETag compute function example

– *Any modification to an order's items is not significant for `/orders`:*


```
1  var crypto = require("crypto");
2
3  function computeWeakETag(orders) {
4      var content = "";
5      for (var i = 0; i < orders.length; i++)
6          content += orders[i].id + orders[i].customer + orders[i].descr;
7      return crypto.createHash('md5').update(content).digest("hex");
8  }
```

## Weak ETag Revalidation

- Updating `/orders` resource

– `POST /orders/{order-id}` inserts a new item to an order

– *Any changes to orders' items will not change the Weak ETag*

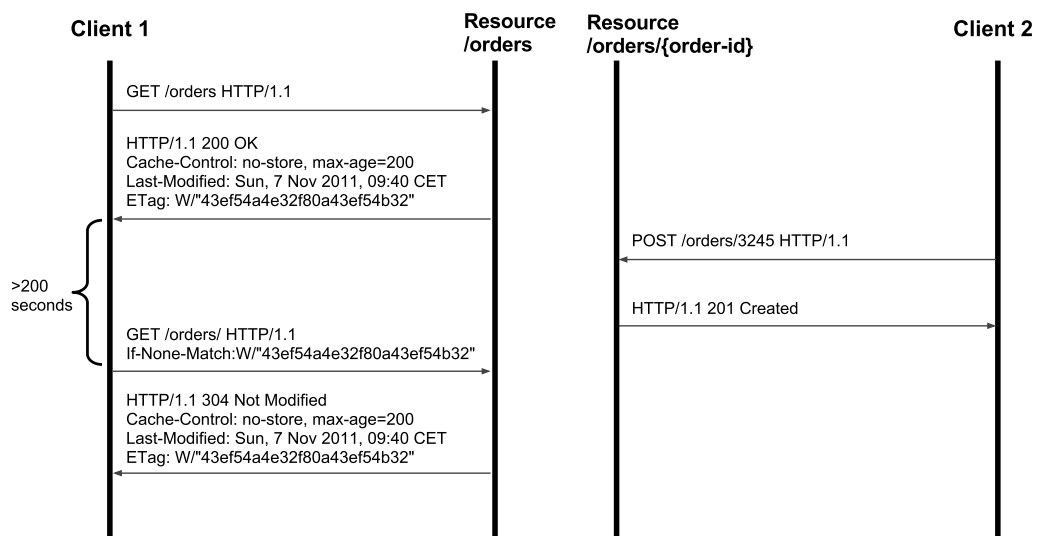

## Overview


- HATEOAS
- Scalability
  - *Caching and Revalidation*
  - *Concurrency Control*
- Description

## Concurrency

- Two clients may update the same resource
  - 1) a client GETs a resource `GET /orders/5545`
  - 2) the client modifies the resource
  - 3) the client updates the resource via `PUT /orders/5545 HTTP/1.1`

*What happens if another client updates the resource between 1) and 3) ?*
- Concurrency control
  - *Conditional PUT*
    - *Update the resource only if it has not changed since a specified date or a specified ETag matches the resource content*
  - *If-Unmodified-Since and If-Match headers*
  - *Response to conditional PUT:*
    - `200 OK` if the `PUT` was successful
    - `412 Precondition Failed` if the resource was updated in the meantime.

# Concurrency Control Protocol

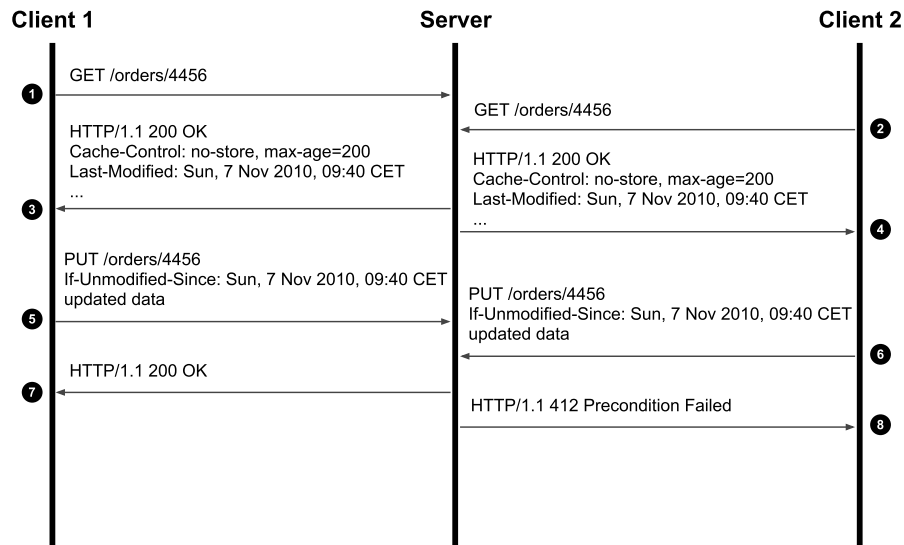

- Conditional PUT and ETags
  - *Conditional PUT must always use strong entity tags or date validation*

## Overview

- HATEOAS
- Scalability
- Description
  - *Documentation*
  - *Service Description and Characteristics*

## Documentation

- RESTful API Documentation
  - *not a standard way, only good practices*
  - *only textual, not in a formal language*
    - *there are attempts such as WADL, hREST*
    - *it is even possible to use WSDL 2.0*
- Client libraries in major languages
  - *JavaScript, Java, ...*
  - *these could be documented*
  - *they hide protocol details*
- Best practices in RESTful API documentation
  - *learn from Google, Twitter, and others*

## Best Practices


- Include resource diagram
  - *in UML, with links*
- For each resource, describe
  - *URI with parameters, such as*  
`http://company.com/orders/{order-id}`
  - *definition of the parameters*
  - *list of properties (attributes), with values, link to XML Schema*
  - *representations you support (XML, JSON)*
  - *sample request*
  - *sample response in representations you support*
  - *error codes*
- Make sure
  - *people can copy sample code and run it in a browser or by using*  
`curl`



## Overview

- HATEOAS
- Scalability
- Description
  - *Documentation*
  - *Service Description and Characteristics*

## Description

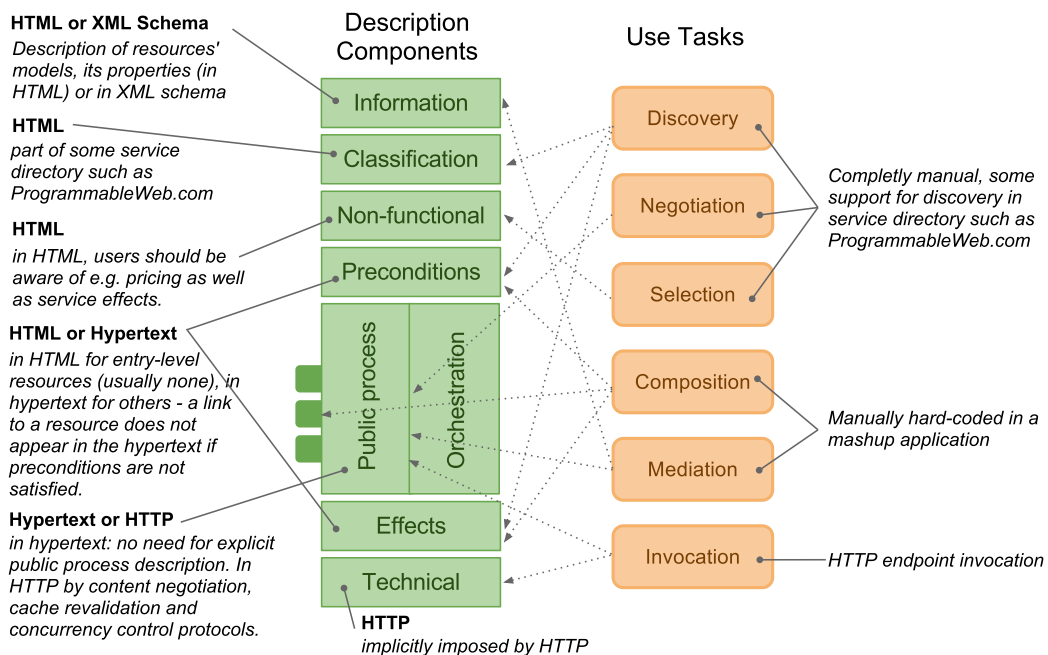

## Service Characteristics and REST

- Loose coupling
  - *Standard response codes*
  - *Standard Internet Media Types*
  - *Links in hypertext; clients follow links while they do not need to construct them*
- Reusability
  - *Multiple representations of resources (XML, JSON, ...)*
  - *Interoperability promoted by uniform interface*
- Contracting
  - *XML Schema (structural)*
  - *Internet Media Types, vendor specific types such as `application/vnd.order+xml`*
  - *Uniform interface*
  - *Hypermedia (behavioral – HATEOAS)*

## Service Characteristics and REST (Cont.)

- Discoverability and Composability
  - *Mostly manual, partial support of directories such as ProgrammableWeb*
  - *Compositions realized programmatically in mashups*
  - *Research efforts to semi-automate discovery and composition*
- Abstraction
  - *Heavily based on HTTP, can be realized in any implementation technologies due to a wide spread of HTTP*
- Encapsulation
  - *Design-specific*