



**OI-OPPA. European Social Fund  
Prague & EU: We invest in your future.**

---



**DCGI**

DEPARTMENT OF COMPUTER GRAPHICS AND INTERACTION

# ARRANGEMENTS (uspořádání)

**PETR FELKEL**

FEL CTU PRAGUE

[felkel@fel.cvut.cz](mailto:felkel@fel.cvut.cz)

<http://service.felk.cvut.cz/courses/X36VGE>

Based on [Berg], [Mount]

Version from 16.12.2011

# Talk overview

---

- Arrangements of lines
  - Incremental construction
  - Topological plane sweep



# Line arrangement

---

- The next most important structure in CG after CH, VD, and DT
- Possible in any dimension  
arrangement of  $(d-1)$ -dimensional hyperplanes
- We concentrate on lines in the plane
- Defined on terms of set of lines  
(set of points up to now) but
- Typical application is solving problems of point sets in dual plane





# Line arrangement

---

- A finite **set  $L$  of lines** subdivides the plane into a cell complex, called **arrangement  $A(L)$**
- Can be defined also for curves & surfaces...
- In plane, arrangement defines a **planar graph**
  - Vertices – intersections of lines (2 or more)
  - Edges – intersection free segments (or rays or lines)
  - Faces – convex regions containing no line (possibly unbounded)
- **Formal problem: graph must have bounded edges**
  - Topological fix: vertex in infinity
  - Geometrical fix: BBOX, often enough as abstract with corners  $\{-\infty, -\infty\}, \{\infty, \infty\}$




# Line arrangement

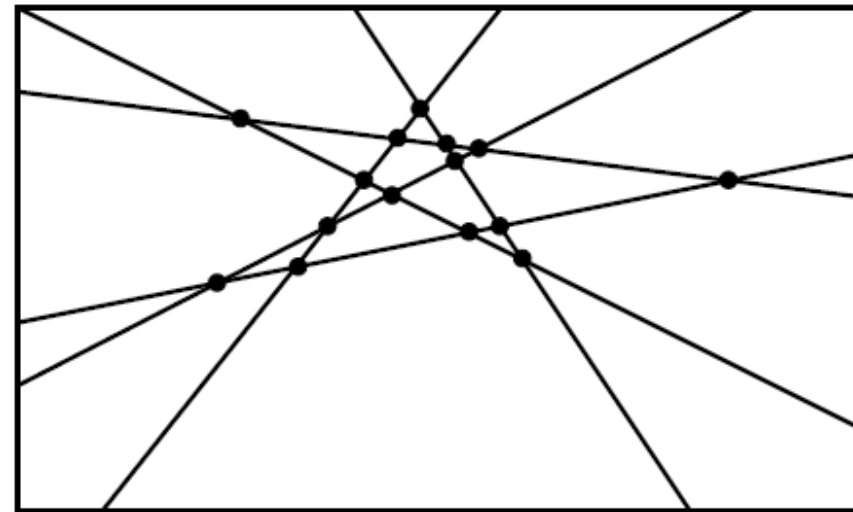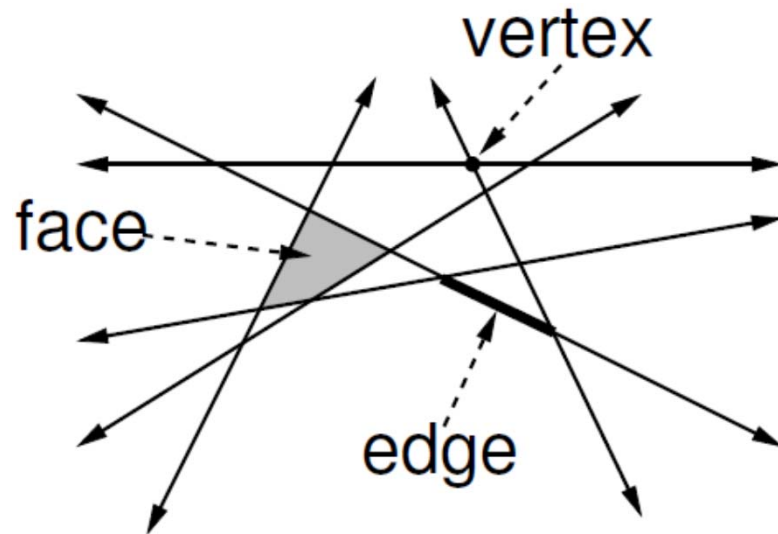

bounding box [Mount]

- Simple arrangement assumption
  - = no three lines intersect in a single point
    - Careful implementation or symbolic perturbation




# Combinatorial complexity of line arrangement

- $O(n^2)$
- Given  $n$  lines in general position, max numbers are
  - Vertices  $\binom{n}{2} = \frac{n(n-1)}{2}$  - each line intersect  $n - 1$  others
  - Edges  $n^2$  -  $n-1$  intersections create  $n$  edges on each of  $n$  lines


– Faces  $\frac{n(n+1)}{2} + 1 = \binom{n}{2} + n + 1$

$$f_0 = 1$$

$$f_n = f_{n-1} + n$$

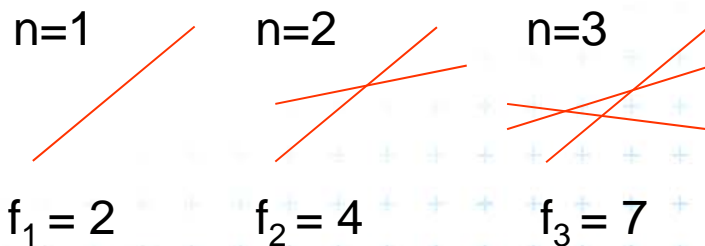

$$f_n = f_0 + \sum_{i=1}^n i = \frac{n(n+1)}{2} + 1$$

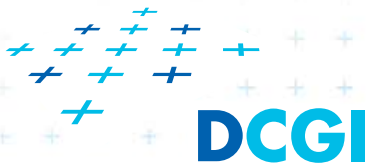

# Construction of line arrangement

---

## (0. Plane sweep method)

- $O(n^2 \log n)$  time and  $O(n)$  storage plus  $O(n^2)$  storage for the arrangement ( $\log n$  - heap access,  $n^2$  vertices, edges, faces)

## 1. Incremental method

- $O(n^2)$  time and  $O(n^2)$  storage
- Optimal method

## 2. Topological plane sweep

- $O(n^2)$  time and  $O(n)$  storage only
- Does not store the result arrangement
- Useful for applications that may throw the arrangement away after processing





# 1. Incremental construction of arrangement

---

- $O(n^2)$  time,  $O(n^2)$  space  
~size of arrangement  $\Rightarrow$  it is an optimal algorithm
- Not randomized – depends on  $n$  only, not on order
- Add line  $l_i$  one by one ( $i = 1 .. n$ )
  - Find the leftmost intersection with BBOX  
among  $2(i-1)+4$  edges on the BBOX ... $O(i)$
  - Trace the line through the arrangement  $A(L_{i-1})$  and split  
the intersected faces ... $O(i)$  – why? See later
  - Update the subdivision (cell split) ... $O(1)$
- Altogether  $O(n^2)$



# 1. Incremental construction of arrangement


---

Arrangement(  $L$  )

*Input:* Set of lines  $L$  in general position (no 3 intersect in 1 common point)


*Output:* Line arrangement  $A(L)$  (resp. part of the arrangement stored in BBOX  $B(L)$  containing all the vertices of  $A(L)$  )

1. Compute the BBOX  $B(L)$  containing all the vertices of  $A(L)$  ... $O(n^2)$
2. Construct DCEL for the subdivision induced by  $B(L)$  ... $O(1)$
3. **for**  $i = 1$  **to**  $n$  **do** // *insert line*  $l_i$
4.     find edge  $e$ , where line  $l_i$  intersects the BBOX of  $2(i-1)+4$  edges ... $O(i)$
5.      $f$  = bounded face incident to  $e$
6.     **while**  $f$  is in  $B(L)$  ( $f$  = bounded face – in the BBOX) ...  $O(???)$
7.         split  $f$  and set  $f$  to be the next intersected face
8.         update the DCEL (split the cell) ... $O(1)$

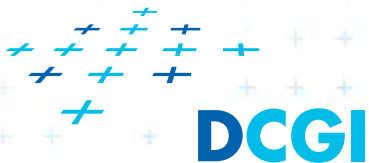


# Tracing the line through the arrangement

- Walk around edges of current face (face walking)
- Determine if the line  $l_i$  intersects this edge
- When intersection found, jump to the face on the other side of this edge

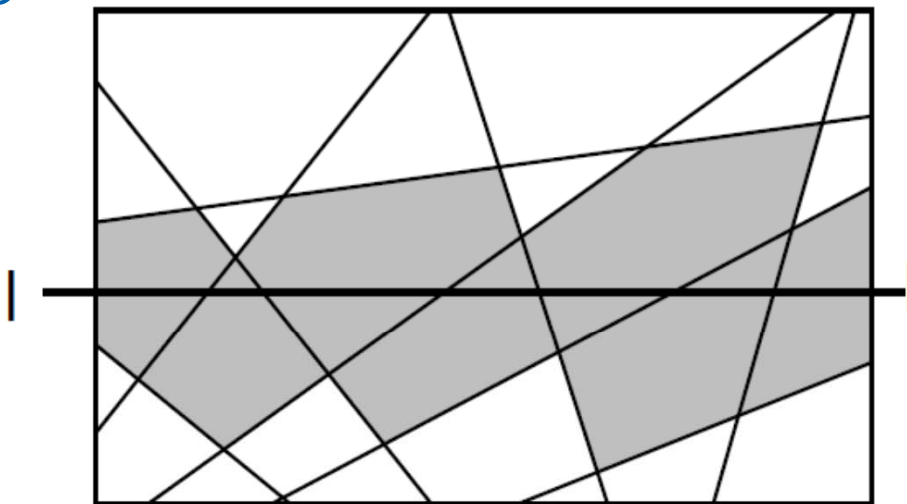

The zone of  $l$

$n=8$  lines, 7 faces in the zone, 22 edges tested of max 48

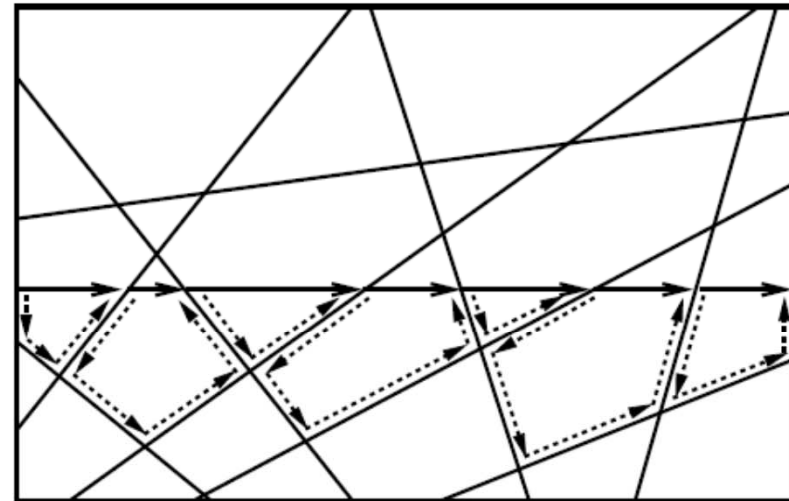

Walking the lower part  
of the zone



# Tracing the line through the arrangement

---

- Number of traversed edges determines the insertion complexity
- Naïve estimation would be  $O(i^2)$  traversed edges ( $i$  faces,  $i$  lines per face,  $i^2$  edges)
- According to the Zone theorem, it is  $O(i)$  edges only!

## Zone theorem



= given an arrangement  $A(L)$  of  $n$  lines in the plane and given any line  $l$  in the plane, the total number of edges in all the cells of the zone  $Z_A(l)$  is at most  $6n$ .

For proof see [Mount, page 69]



# Cell split

- 2 new face records, 1 new vertex, 2+2 new half-edges + update pointers ...  $O(1)$

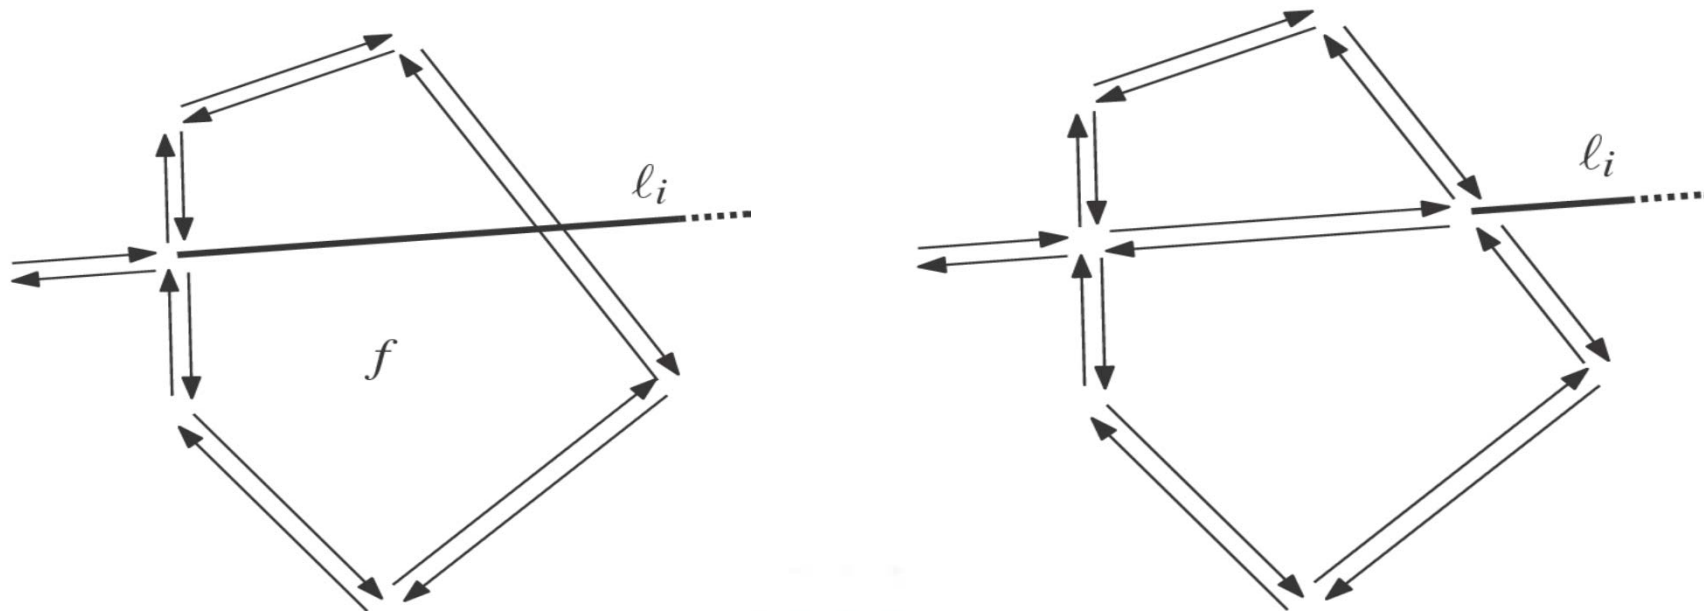

# Complexity of incremental algorithm

---

- n insertions
- $O(i) = O(n)$  time for one line insertion  
(Zone theorem)

=> Complexity:  $O(n^2) + n \cdot O(i) = O(n^2)$



bbox      edges walked




## 2. Topological plane sweep algorithm

---

- Complete arrangement needs  $O(n^2)$  storage
- Often we need just to **process each arrangement element just once** – and we can throw it then
- Classical **Sweep line** algorithm
  - needs  $O(n)$  storage
  - needs  $\log n$  for **heap** manipulation in  $O(n^2)$  event points  
 $\Rightarrow O(n^2 \log n)$  algorithm
- **Topological sweep line - TSL**
  - disperses  $O(\log n)$  factor in time
  - **array** of neighbors and a **stack** of ready vertices  
 $\Rightarrow O(n^2)$  algorithm

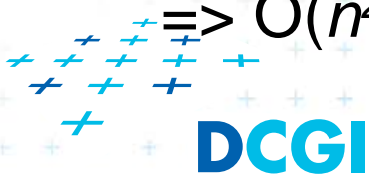

# Illustration from Edelsbrunner & Guibas

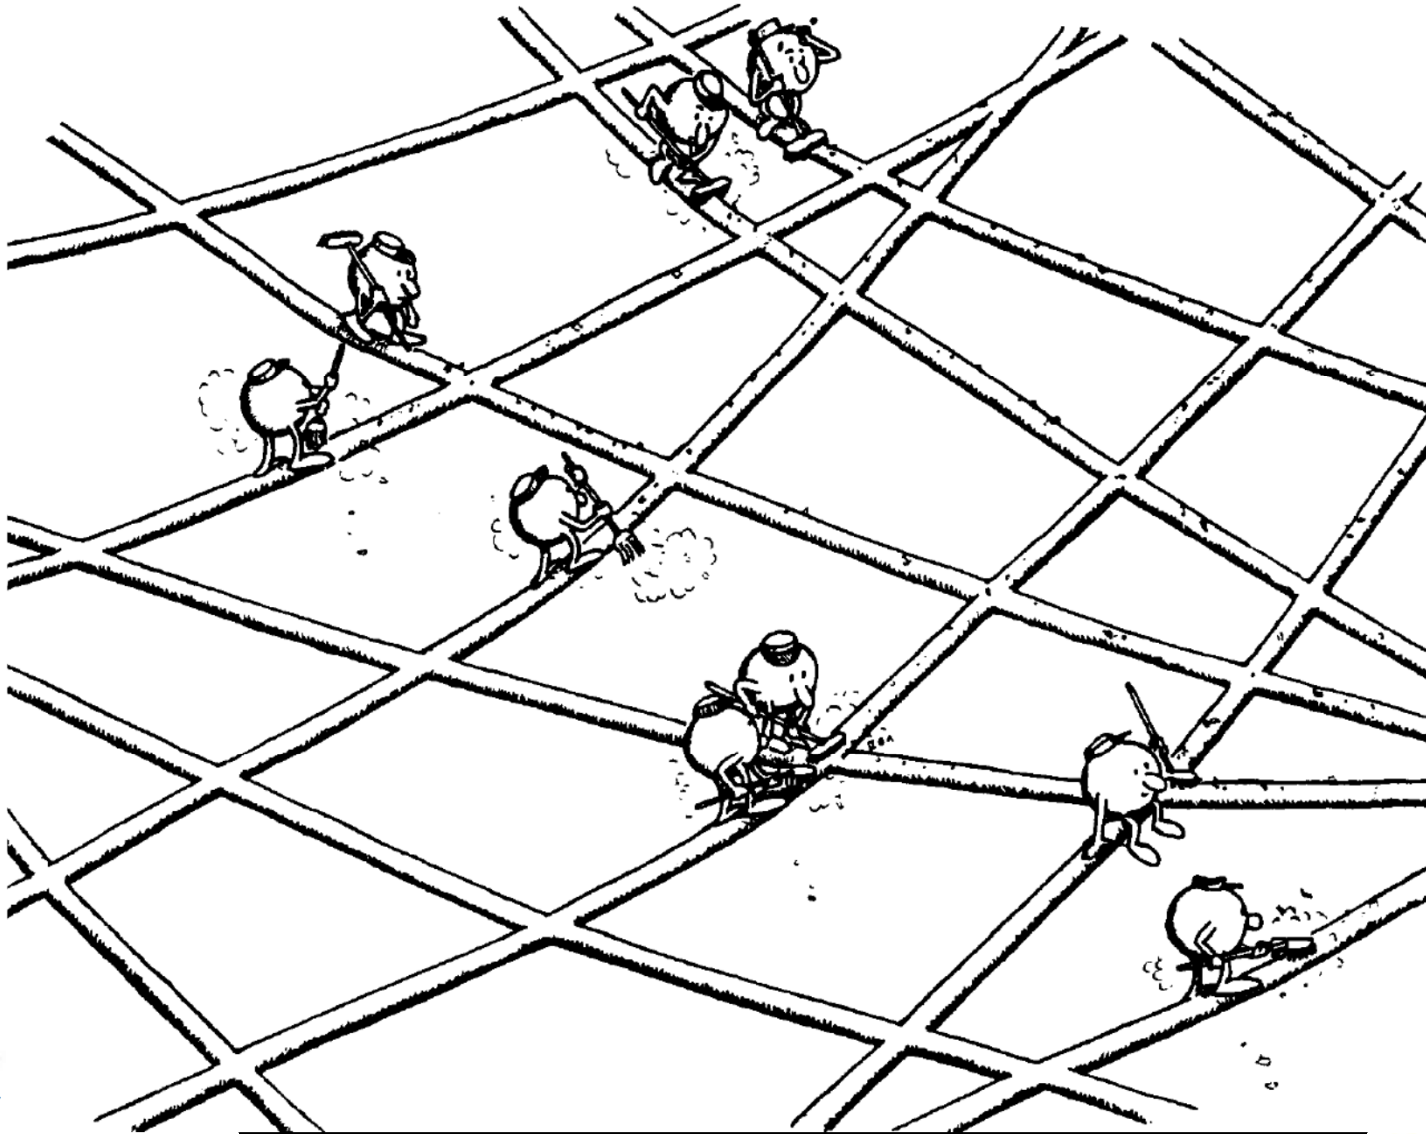

**DCGI**

Felkel: Computational geometry

(15 / 38)






# Topological line and cut

## Topological line (curve)

(an intuitive notion)

- Monotonic line in y-dir
- intersects each line exactly once (as a sweep line)

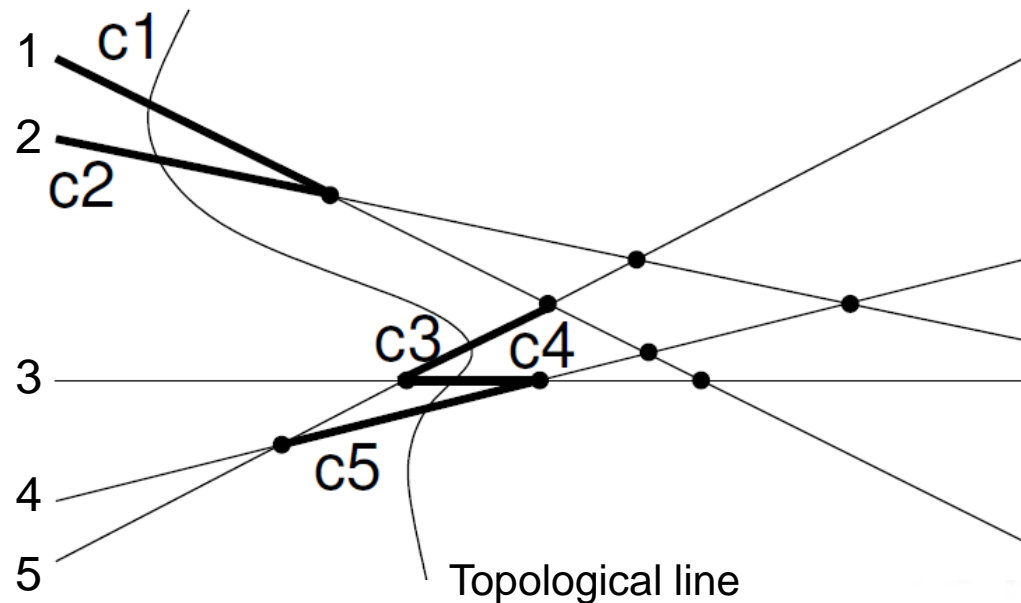

## Cut in an arrangement A

- is a sequence of edges  $c_1, c_2, \dots, c_n$  in A (one taken from each line), such that for  $1 \leq i \leq n-1$ ,  $c_i$  and  $c_{i+1}$  are **incident to the same face** of A and  $c_i$  is **above** and  $c_{i+1}$  **below** the face
- Edges not necessarily connected



# Topological plane sweep algorithm



- Starts at the **leftmost cut**
  - Consist of left-unbounded edges of  $A$  (ending at  $-\infty$ )
  - Computed in  $O(n \log n)$  time – inverse order of slopes
- The sweep line is
  - pushed from the leftmost cut to the rightmost cut
  - Advances in elementary steps

- **Elementary step**

= Processing of a *ready vertex*


(intersection of consecutive edges at their right-point)

- Swaps the order of lines along the sweep line
- Is always possible (e.g., the point with smallest  $x$ )
- Searching of smallest  $x$  would need  $O(\log n)$  time

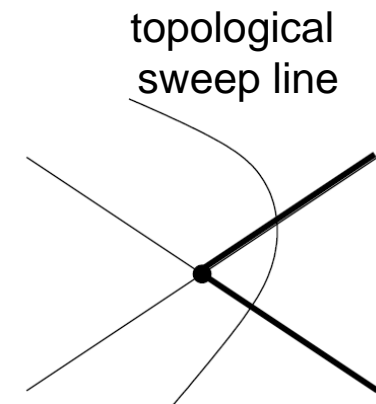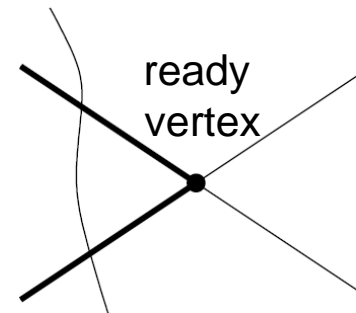


# The leftmost cut

---

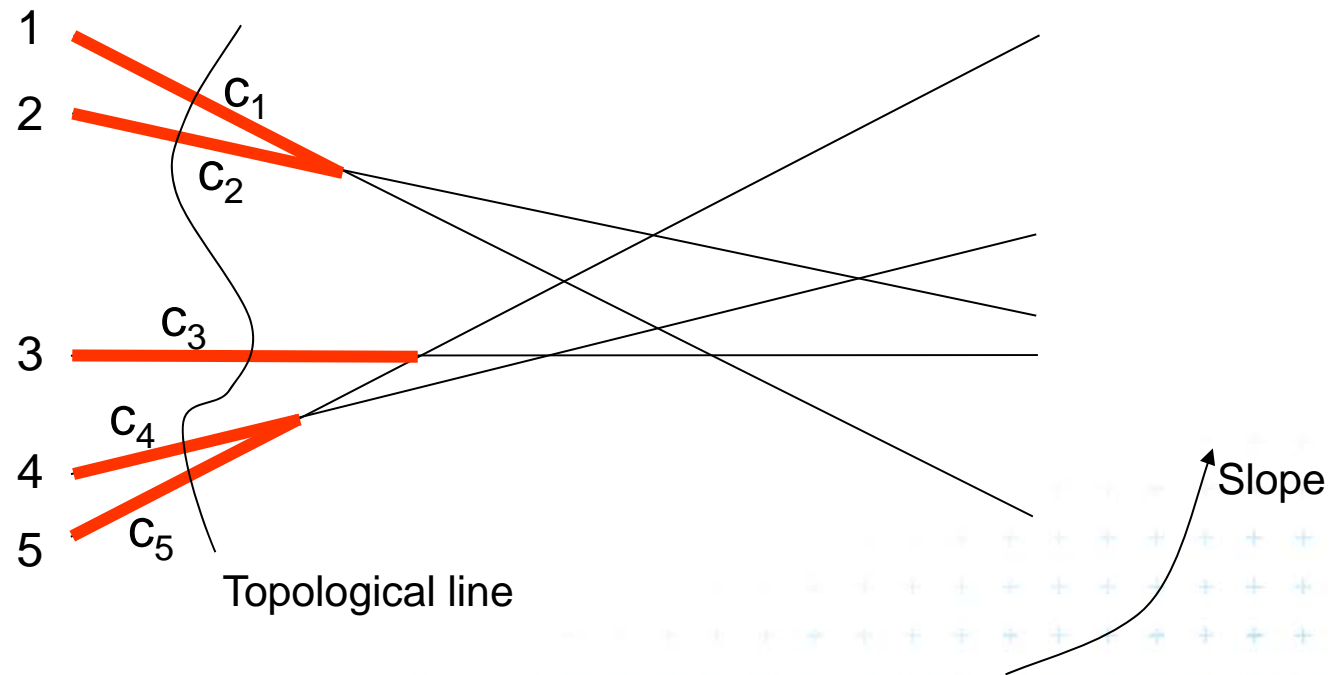



# The cut during the topological plane sweep

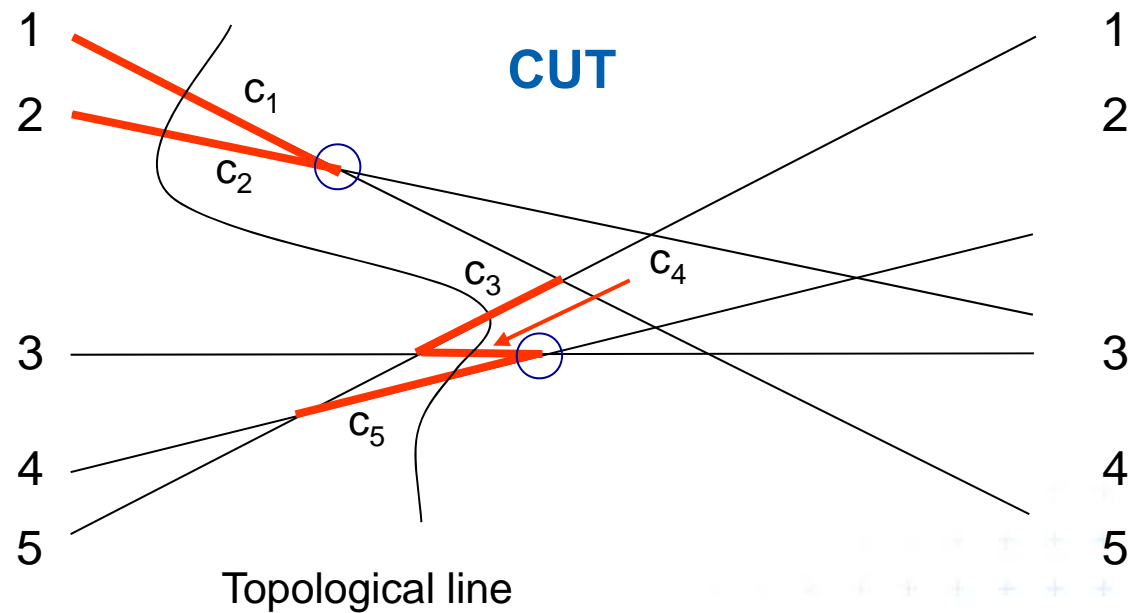

# How to determine the next right point?

---

- **Elementary step** (intersection at edges right-point)
  - Is always possible (e.g., the point with smallest  $x$ )
  - But searching the smallest  $x$  would need  $O(\log n)$  time
  - We need  $O(1)$  time
- **Right endpoint** of the edge in the cut results from
  - a line of *smaller slope* intersecting it *from above* (traced from L to R) or
  - line of *larger slope* intersecting it *from below*.
- **Use Upper and Lower Horizon Trees (UHT, LHT)**
  - Common segments of UHT and LHT belong to the cut
  - Intersect the trees, find pairs of consecutive edges
  - use the right points as legal steps (push to stack)

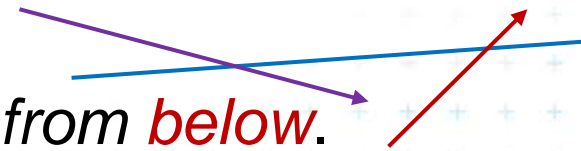

# Upper and lower horizon tree

---

- Upper horizon tree (UHT)
  - Insert lines in order of **decreasing** slope
  - When two edges meet, **keep the edge with higher slope and trim the edge with lower slope**
  - To get one tree and not the forest of trees (if not connected) add vertical line in  $+\infty$
  - **Left endpoints** of the edges in the cut do not belong to the tree





- Lower horizon tree (LHT) is symmetrical
- UHT and LHT **serve for right endpoints determination**




# Upper horizon tree (UHT) – initial tree

- Insert lines in order of **decreasing slope**

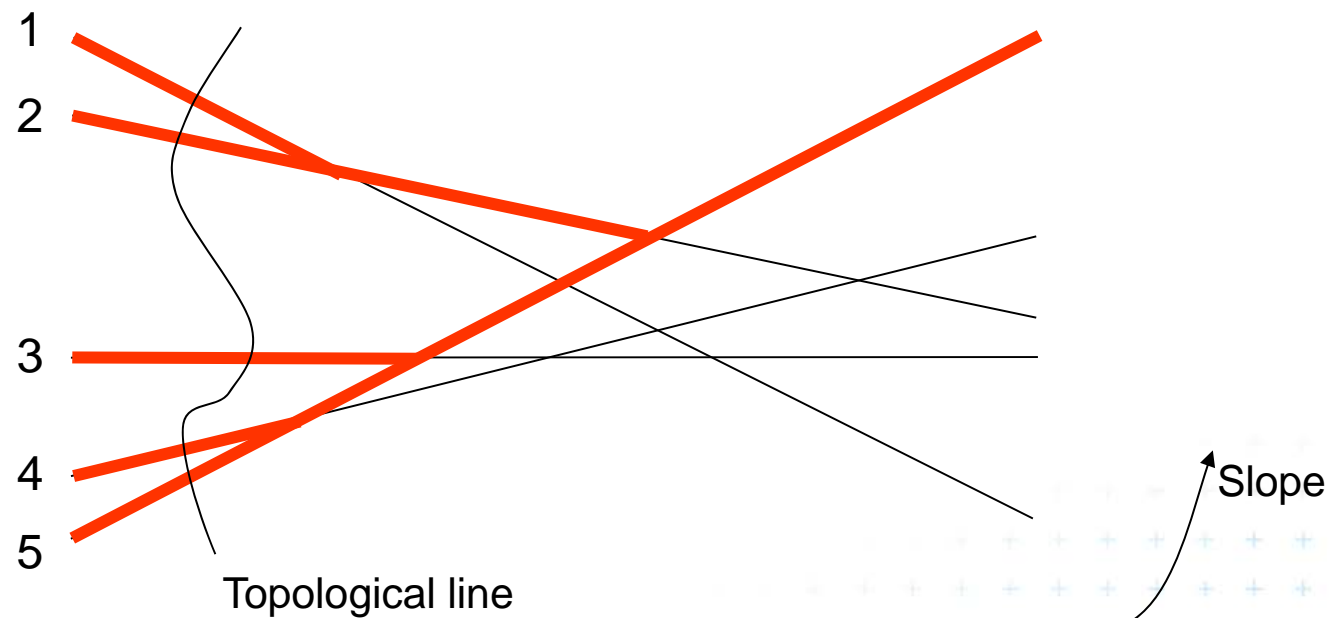

# Lower horizon tree (LHT) – initial tree


- Insert lines in order of **increasing slope**

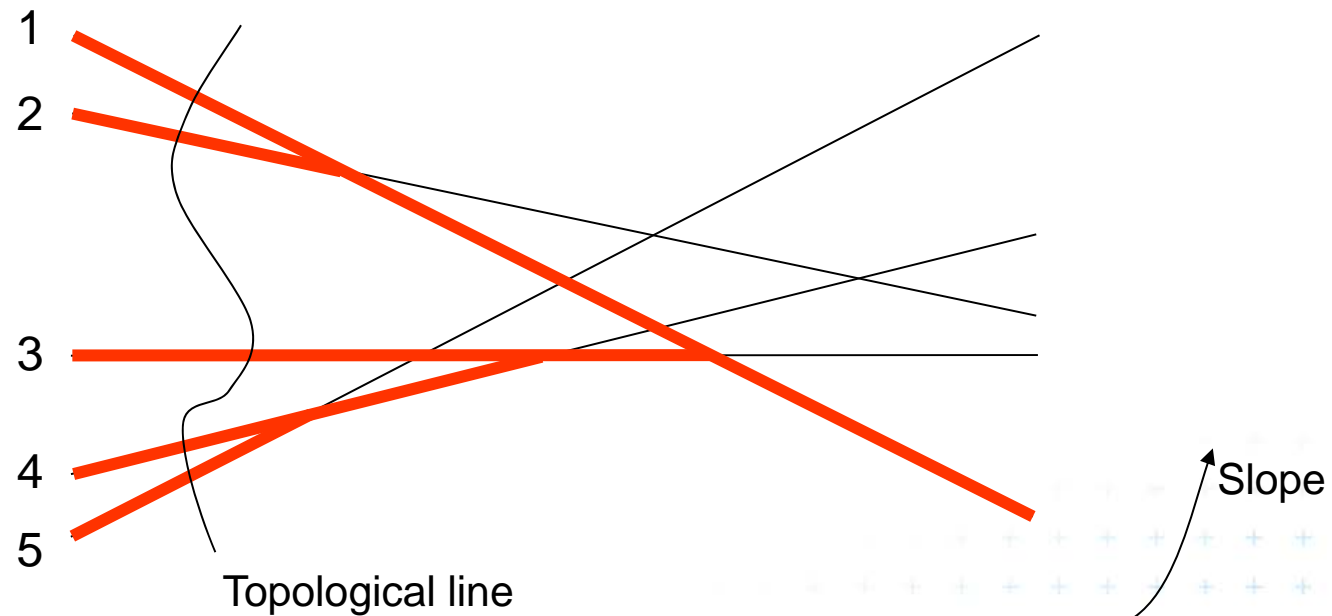





# Upper horizon tree (UHT) – init. construction

- Insert lines in order of **decreasing slope**
- Each new line starts above all the current lines
- The uppermost face = convex polygonal chain
- Walk left to right along the chain to determine the intersection
- Never walk twice over segment
  - Such segment is no longer part of the upper chain
  - $O(n)$  segments in UHT $\Rightarrow O(n)$  initial construction  
(after  $n \log n$  sorting of the lines)

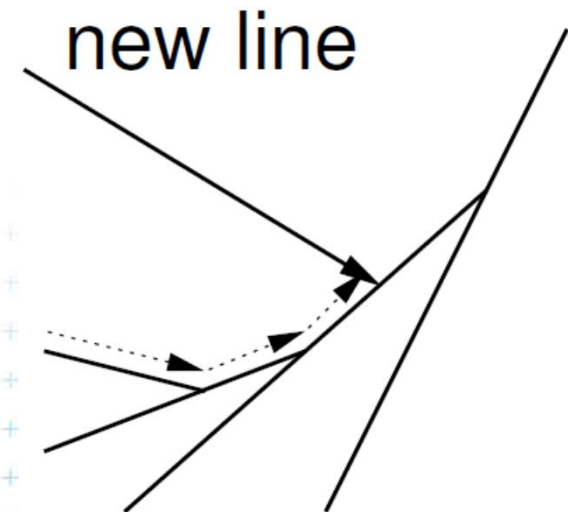

# Upper horizon tree (UHT) – update

- After the elementary step
- Two edges swap position along the sweep line
- Lower edge  $l$ 
  - Reenter to UHT
  - Terminate at nearest edge of UHT
  - Start in edge below in the current cut
  - Traverse the face in CCW order
  - Intersection must exist, as  $l$  has lower slope than the other edge from  $v$  and both belong to the same face

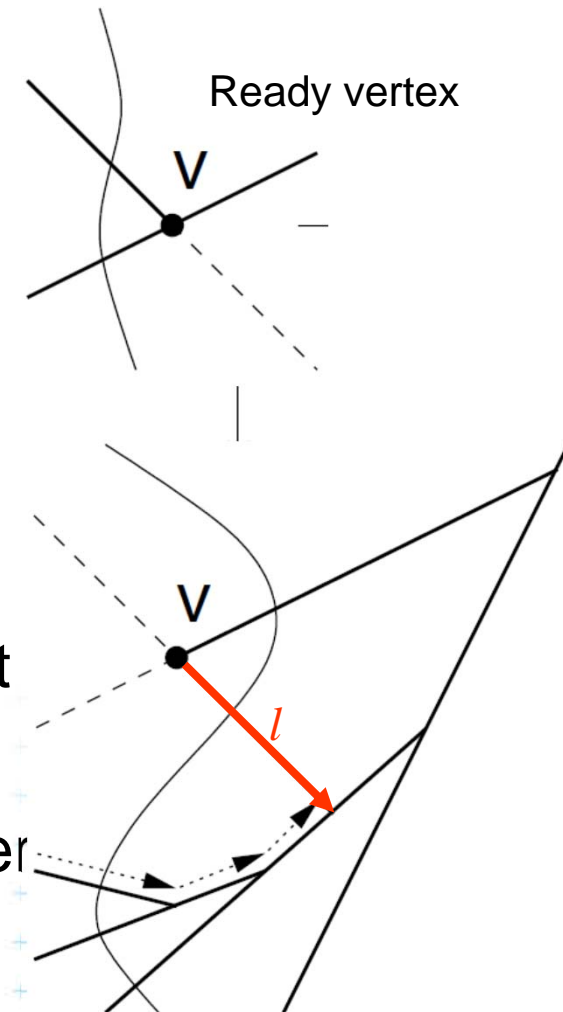

# Data structures for topological sweep alg.

---


Topological sweep line algorithm uses 5 arrays:

1. Line equation coefficients –  $E [1:n]$
2. Upper horizon tree – UHT  $[1:n]$
3. Lower horizon tree – LHT  $[1:n]$
4. Order of lines cut by the sweep line –  $C [1:n]$
5. Edges along the sweep line –  $N [1:n]$
6. Stack for ready vertices (events) –  $S$

( $n$  number of lines)



# 1) Line equation coefficients $E [1:n]$

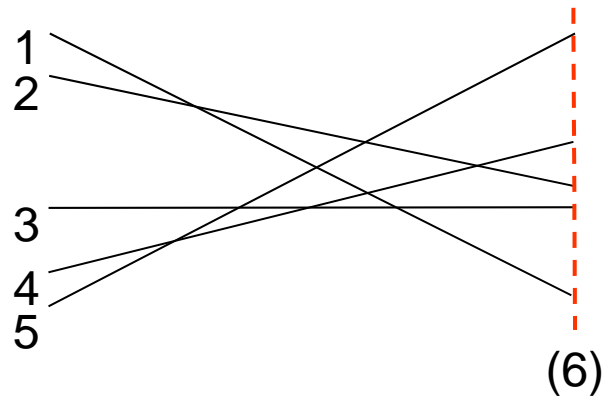


- Array of line equation coefs.  $E$ 
  - Contains coefficients  $a_i$  and  $b_i$  of line equations  $y = a_i x + b_i$
  - $E$  is indexed by the **line index**
  - **Lines are ordered** according to their slope (angle from  $-90^\circ$  to  $90^\circ$ )

Array of line equations  $E$


$$y = a_i x + b_i$$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |



# 2) and 3) – Horizon trees UHT and LHT

Their intersection is used for searching of legal steps (right points)  
 - the shorter edge wins

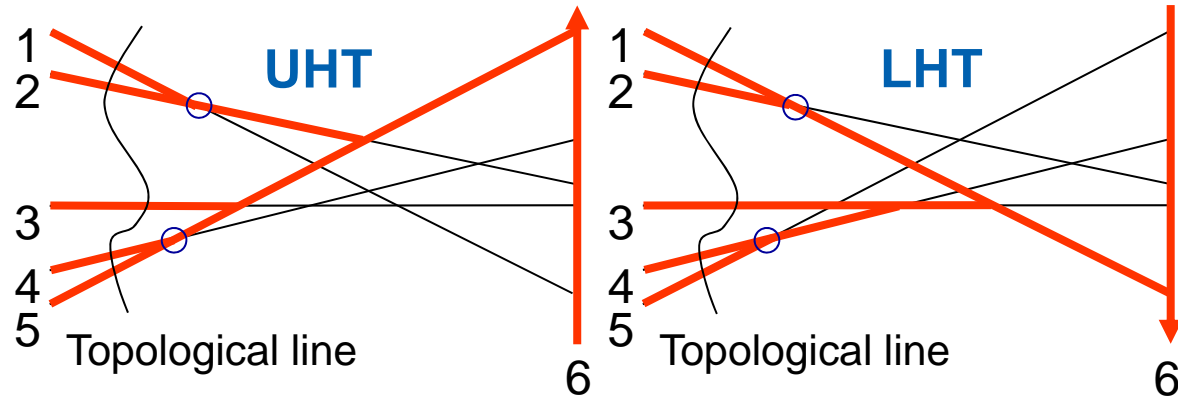

UHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | $-\infty$ | 5         |
| 5 | $-\infty$ | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | $-\infty$ | 3         |
| 5 | $-\infty$ | 4         |
| 6 | $+\infty$ | $-\infty$ |

Store pairs of line indices in E that delimit segment  $l_i$  to the left and to the right

Unlimited line has “indices”  $[-\infty, +\infty]$

One additional vertical line

- prevents the tree from splitting into forest of trees
- is inserted first and never trimmed
- is  $[-\infty, +\infty]$  for UHT
- is  $[\infty, -\infty]$  for LHT



## 4) Order of lines cut by sweep line – $C [1:n]$

- The topological sweep line cuts each line once
- Order of these cuts (along the topological sweep line) is stored in array  $C$  as a sequence of line indices
- For the initial leftmost cut, the order is the same as in  $E$
- Index  $c_i$  addresses  $i$ -th line from top along the sweep line

CUT Lines  $C$   
Indexes of supporting lines

|       |   |
|-------|---|
| $c_1$ | 1 |
| $c_2$ | 2 |
| $c_3$ | 3 |
| $c_4$ | 4 |
| $c_5$ | 5 |



## 5) Edges along the sweep line – $N [1:n]$

- Edges intersected by the topological sweep line are stored here (edges along the sweep line)
- Instead of endpoints themselves, we store the **indices of lines whose intersections delimit the edge**
- Order of these edges is the same as in  $C$  (this is the way used in the original paper)
- Index  $c_i$  addresses  $i$ -th edge from top along the sweep line

CUT edges  $N$   
Pairs of line indices  
delimiting the edge

|       |           |          |
|-------|-----------|----------|
| $c_1$ | $-\infty$ | <b>2</b> |
| $c_2$ | $-\infty$ | <b>1</b> |
| $c_3$ | $-\infty$ | <b>5</b> |
| $c_4$ | $-\infty$ | <b>5</b> |
| $c_5$ | $-\infty$ | <b>4</b> |



## 6) Stack S

---

- The exact order of events is not important
- Alg. can process any of the “ready vertex”
- **Event queue** is therefore **replaced by a stack** (faster –  $O(1)$  instead of  $O(\log n)$  of the queue)
- The stack stores just the **upper edge  $c_i$**
- Intersection in the ready vertex is computed between stored  $c_i$  and  $c_{i+1}$


Stack S  
Ready vertex  
first edge idx





# Topological sweep line demo

---

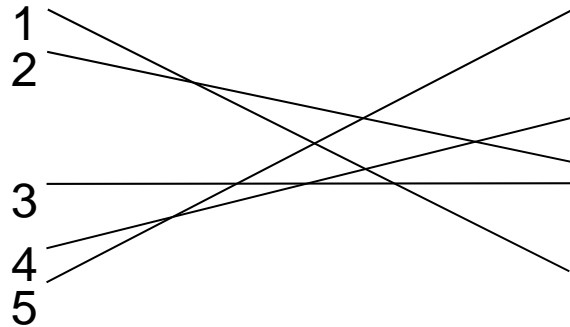


Array of line equations  $E$

$$y = a_i x + b$$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

Input


- set of lines  $L$  in the plane
- ordered in increasing slope ( $-90^\circ$  to  $90^\circ$ ), simple, not vertical
- line parameters in array  $E$



**DCGI**



# 1. Initial leftmost cut - C

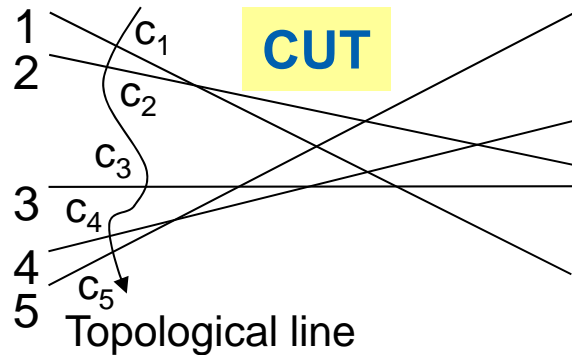

- Store the line indices into the Cut lines array C in increasing slope order

Array of line equations E  
 $y = a_i x + b$


|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

CUT Lines C  
Indexes of supporting lines

|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 4 |
| c5 | 5 |



# 1. Initial leftmost cut - N

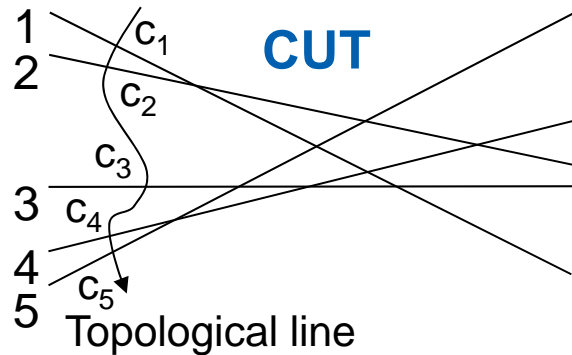

- Prepare array  $N$  for endpoints of the cutted edges (resp. for line indices delimiting these edges)

Array of line equations  $E$   
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

indices of lines



**DCGI**

CUT edges  $N$   
 Pairs of line indices delimiting the edge



|    |           |          |
|----|-----------|----------|
| c1 | $-\infty$ | $\infty$ |
| c2 | $-\infty$ | $\infty$ |
| c3 | $-\infty$ | $\infty$ |
| c4 | $-\infty$ | $\infty$ |
| c5 | $-\infty$ | $\infty$ |

CUT Lines  $C$   
 Indexes of supporting lines

|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 4 |
| c5 | 5 |



# 2a) Compute Upper Horizon Tree - UHT

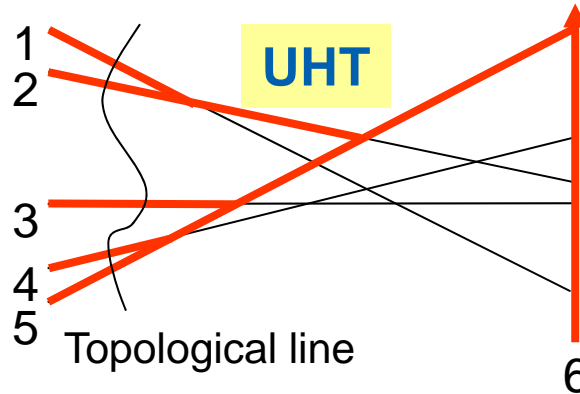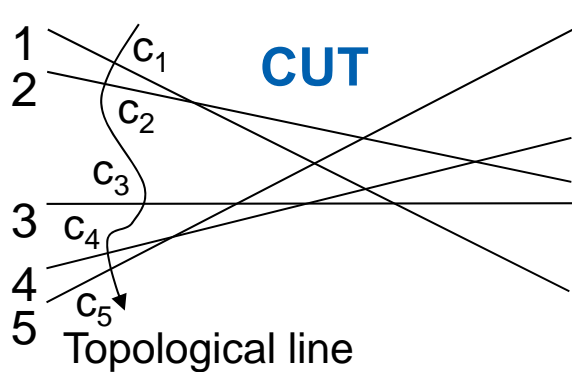

Array of line equations E  
 $y = a_i x + b_i$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | $-\infty$ | 5         |
| 5 | $-\infty$ | 6         |
| 6 | $-\infty$ | $+\infty$ |

CUT edges N  
Pairs of line indices delimiting the edge

|       |           |          |
|-------|-----------|----------|
| $c_1$ | $-\infty$ | $\infty$ |
| $c_2$ | $-\infty$ | $\infty$ |
| $c_3$ | $-\infty$ | $\infty$ |
| $c_4$ | $-\infty$ | $\infty$ |
| $c_5$ | $-\infty$ | $\infty$ |




CUT Lines C  
Indexes of supporting lines

|       |   |
|-------|---|
| $c_1$ | 1 |
| $c_2$ | 2 |
| $c_3$ | 3 |
| $c_4$ | 4 |
| $c_5$ | 5 |

Inserted first, never changed



# 2b) Compute Lower Horizon Tree - LHT

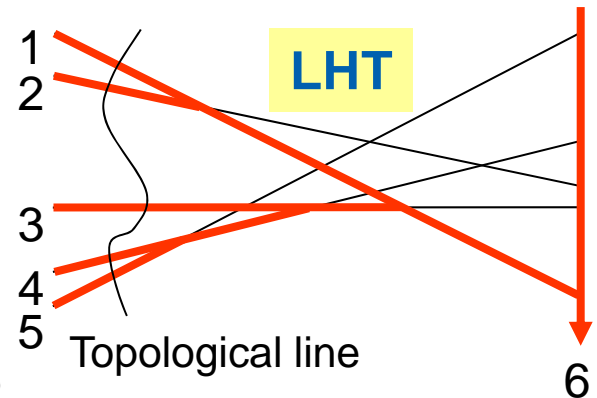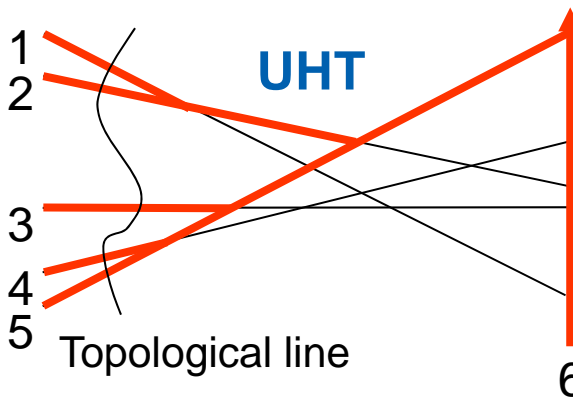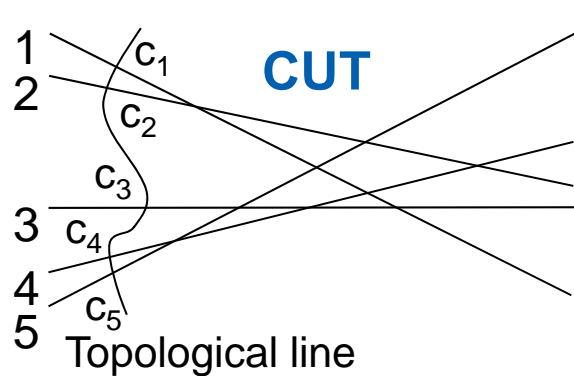

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | $-\infty$ | 5         |
| 5 | $-\infty$ | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | $-\infty$ | 3         |
| 5 | $-\infty$ | 4         |
| 6 | $+\infty$ | $-\infty$ |


CUT edges N  
Pairs of line indices delimiting the edge

|       |           |          |
|-------|-----------|----------|
| $c_1$ | $-\infty$ | $\infty$ |
| $c_2$ | $-\infty$ | $\infty$ |
| $c_3$ | $-\infty$ | $\infty$ |
| $c_4$ | $-\infty$ | $\infty$ |
| $c_5$ | $-\infty$ | $\infty$ |


CUT Lines C  
Indexes of supporting lines

|       |   |
|-------|---|
| $c_1$ | 1 |
| $c_2$ | 2 |
| $c_3$ | 3 |
| $c_4$ | 4 |
| $c_5$ | 5 |




Stack S  
Ready vertex first edge idx



Inserted first, never changed



# 3a) Determine right delimiters of edges - N

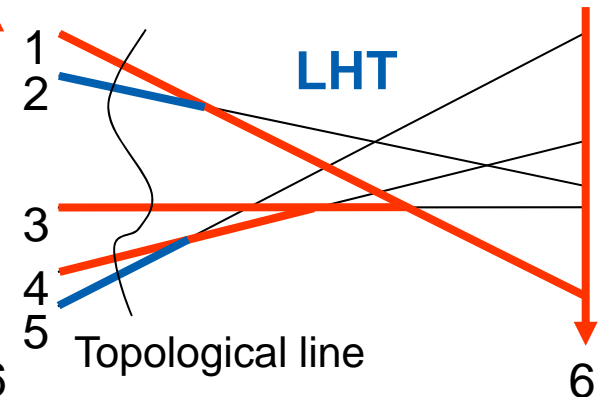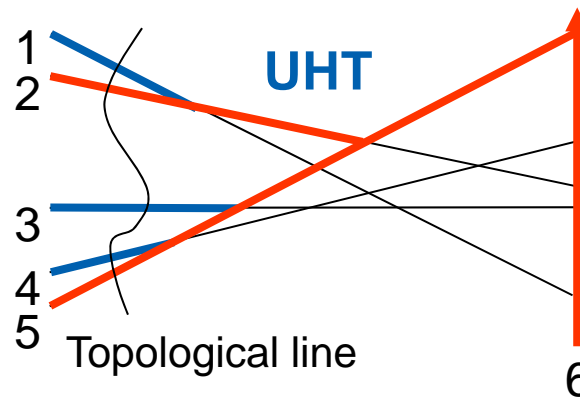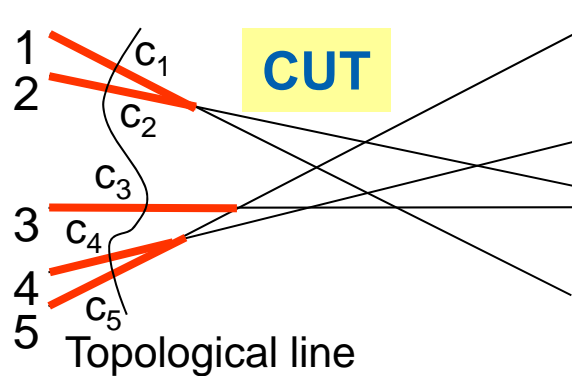

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | $-\infty$ | 5         |
| 5 | $-\infty$ | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | $-\infty$ | 3         |
| 5 | $-\infty$ | 4         |
| 6 | $+\infty$ | $-\infty$ |


**CUT edges N**  
Pairs of line indices delimiting the edge

|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | $-\infty$ | 5 |
| c4 | $-\infty$ | 5 |
| c5 | $-\infty$ | 4 |


CUT Lines C  
Indexes of supporting lines

|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 4 |
| c5 | 5 |




Stack S  
Ready vertex first edge idx



Intersect the trees – take the shorter edge



# 3b) Ready vertices = int. of neighbors – S

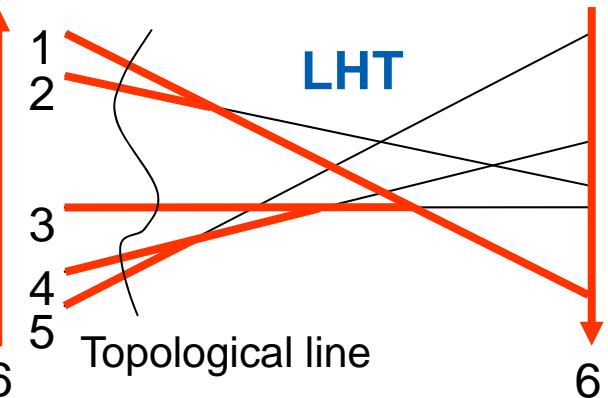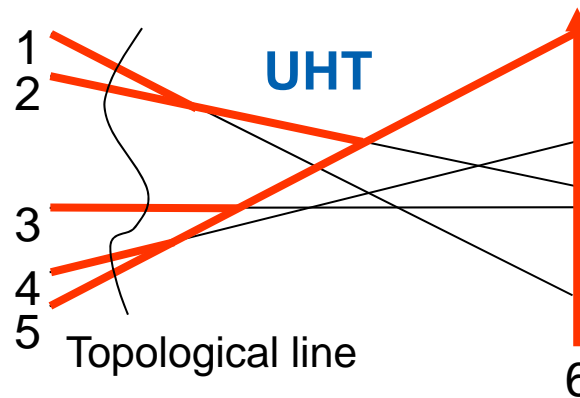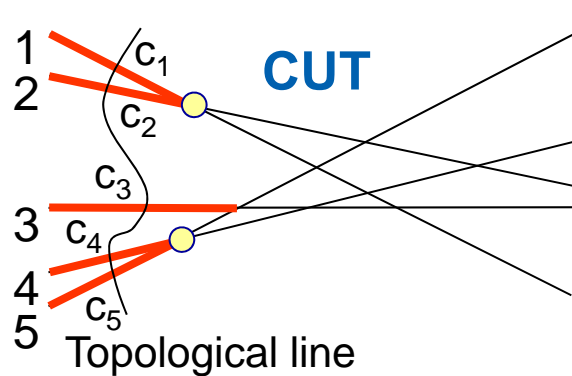

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | $-\infty$ | 5         |
| 5 | $-\infty$ | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | $-\infty$ | 3         |
| 5 | $-\infty$ | 4         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
Pairs of line indices delimiting the edge


|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | $-\infty$ | 5 |
| c4 | $-\infty$ | 5 |
| c5 | $-\infty$ | 4 |

CUT Lines C  
Indexes of supporting lines




|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 4 |
| c5 | 5 |

Stack S  
Ready vertex first edge idx

|    |
|----|
| c4 |
| c1 |



# 4a) Pop ready vertex from S – process c4

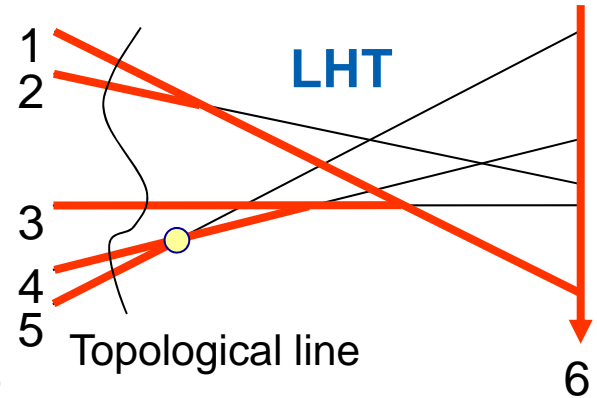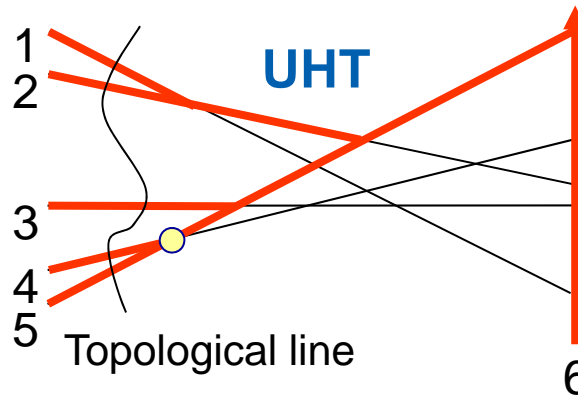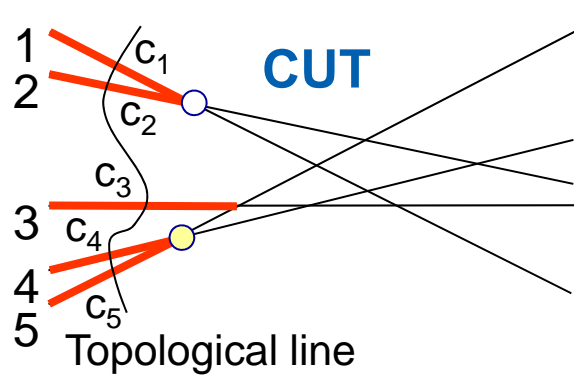

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | $-\infty$ | 5         |
| 5 | $-\infty$ | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | $-\infty$ | 3         |
| 5 | $-\infty$ | 4         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
Pairs of line indices delimiting the edge


|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | $-\infty$ | 5 |
| c4 | $-\infty$ | 5 |
| c5 | $-\infty$ | 4 |

CUT Lines C  
Indexes of supporting lines

|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 4 |
| c5 | 5 |




Stack S  
Ready vertex first edge idx

|    |
|----|
| c4 |
| c1 |





# 4b) Swap lines c4 and c5 – swap 4 and 5

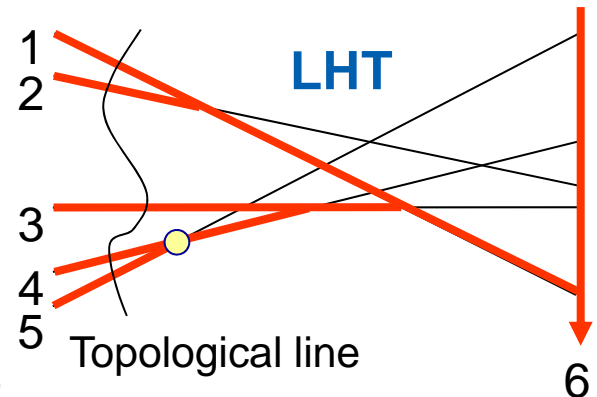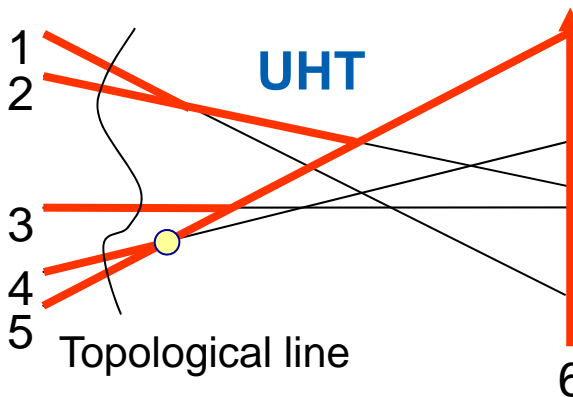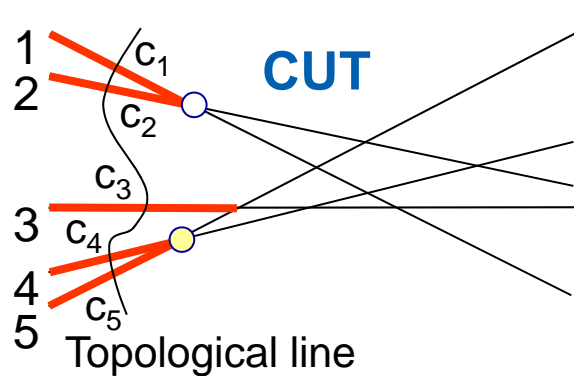

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | $-\infty$ | 5         |
| 5 | $-\infty$ | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | $-\infty$ | 3         |
| 5 | $-\infty$ | 4         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
Pairs of line indices delimiting the edge


|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | $-\infty$ | 5 |
| c4 | $-\infty$ | 4 |
| c5 | $-\infty$ | 5 |

CUT Lines C  
Indexes of supporting lines


|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 5 |
| c5 | 4 |

Stack S  
Ready vertex first edge idx

|    |
|----|
| c1 |
|----|



# 4c) Update the horizon trees – UHT and LHT

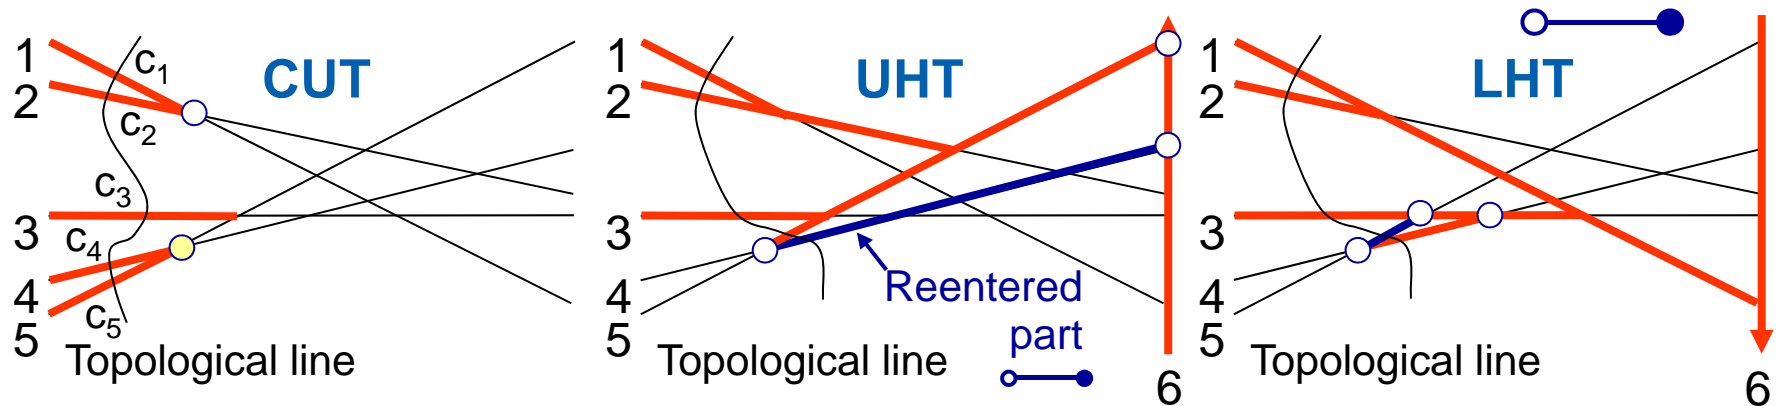

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | 5         | 6         |
| 5 | 4         | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | 5         | 3         |
| 5 | 4         | 3         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
 Pairs of line indices delimiting the edge


|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | $-\infty$ | 5 |
| c4 | $-\infty$ | 4 |
| c5 | $-\infty$ | 5 |

CUT Lines C  
 Indexes of supporting lines




|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 5 |
| c5 | 4 |

Stack S  
 Ready vertex upper edge id

|    |
|----|
| c1 |
|----|



# 4d) Determine new cut edges endpoints – N

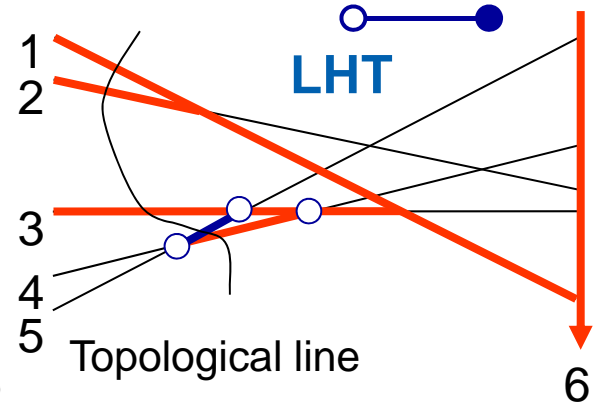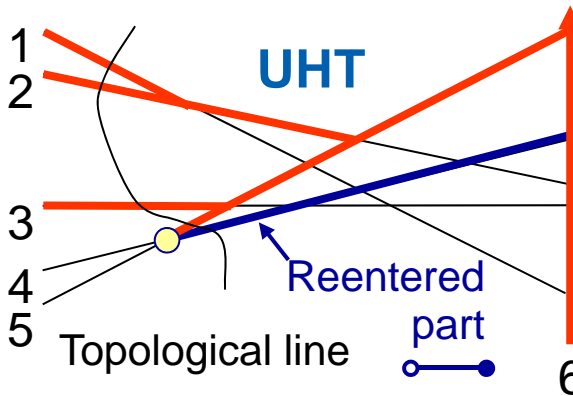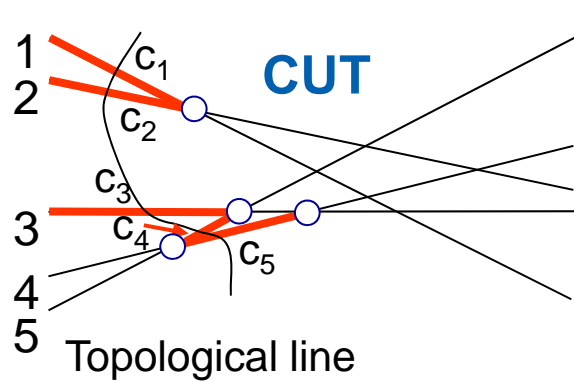

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | 5         | 6         |
| 5 | 4         | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | 5         | 3         |
| 5 | 4         | 3         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
Pairs of line indices delimiting the edge


|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | $-\infty$ | 5 |
| c4 | 4         | 3 |
| c5 | 5         | 3 |

CUT Lines C  
Indexes of supporting lines


|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 5 |
| c5 | 4 |

Stack S  
Ready vertex upper edge id




|    |
|----|
| c1 |
|----|



Intersect the trees – take the shorter edge



# 4e) Intersect with neighbors – push into S

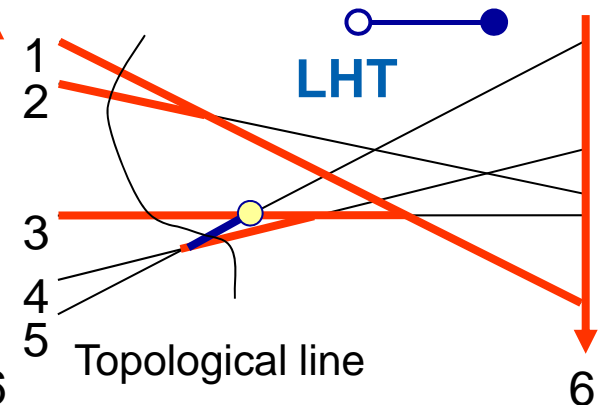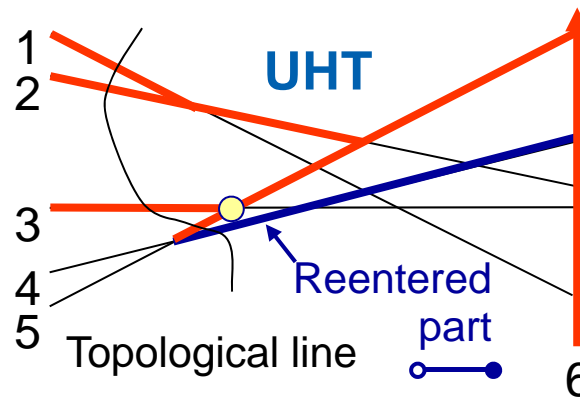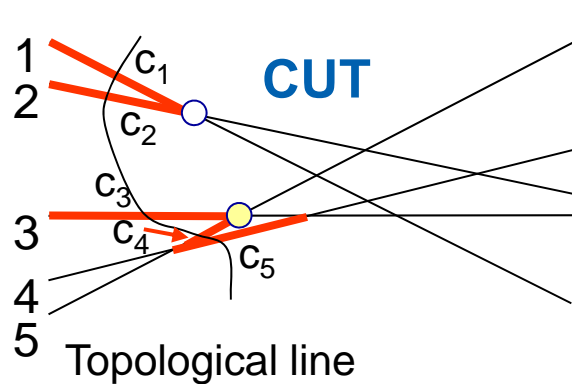

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | 5         | 6         |
| 5 | 4         | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | 5         | 3         |
| 5 | 4         | 3         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
 Pairs of line indices delimiting the edge

|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | $-\infty$ | 5 |
| c4 | 4         | 3 |
| c5 | 5         | 3 |

CUT Lines C  
 Indexes of supporting lines

|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 5 |
| c5 | 4 |




Stack S  
 Ready vertex upper edge id

|    |
|----|
|    |
|    |
|    |
| c3 |
| c1 |

Intersections of neighbors - into stack



# 4a) Pop ready vertex from S – process c3

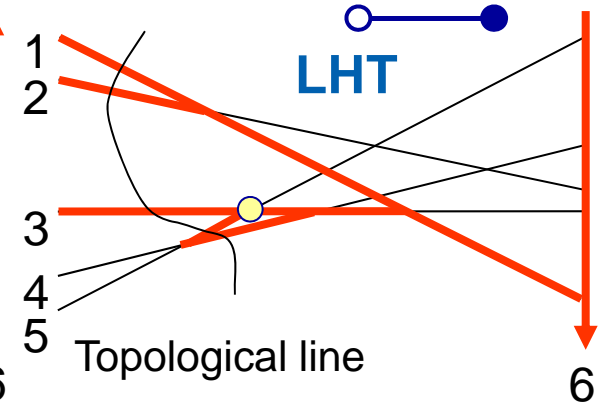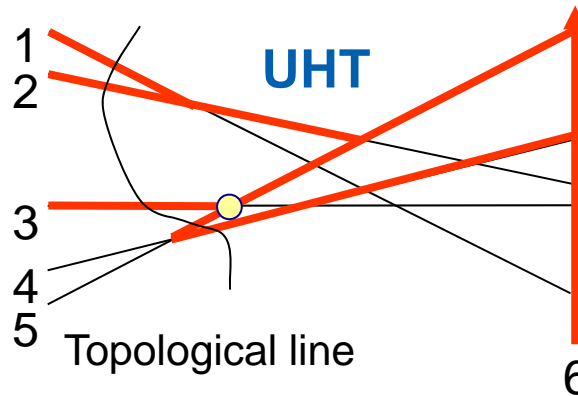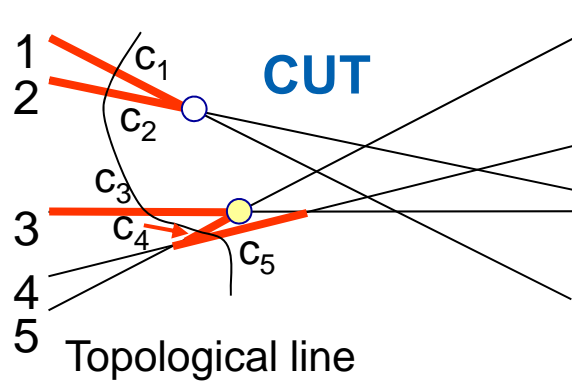

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | 5         | 6         |
| 5 | 4         | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | 5         | 3         |
| 5 | 4         | 3         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
Pairs of line indices delimiting the edge


|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | $-\infty$ | 5 |
| c4 | 4         | 3 |
| c5 | 5         | 3 |

CUT Lines C  
Indexes of supporting lines




|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 3 |
| c4 | 5 |
| c5 | 4 |

Stack S  
Ready vertex first edge idx

|           |
|-----------|
|           |
|           |
| <b>c3</b> |
| c1        |



# 4b) Swap lines c4 and c5 – swap 4 and 5

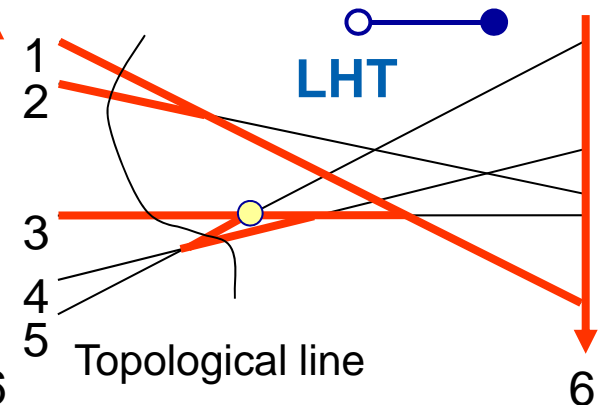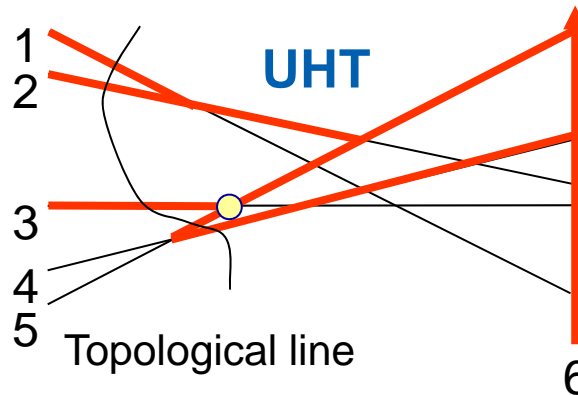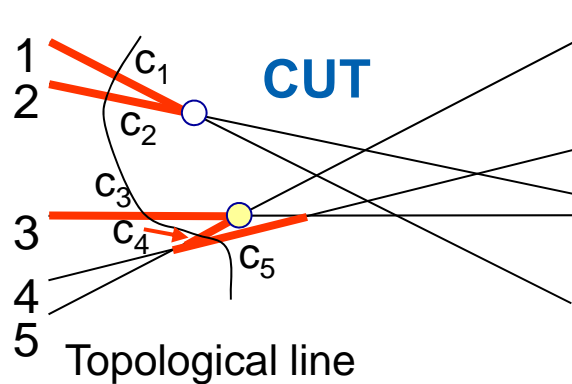

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | $-\infty$ | 5         |
| 4 | 5         | 6         |
| 5 | 4         | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | $-\infty$ | 1         |
| 4 | 5         | 3         |
| 5 | 4         | 3         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
 Pairs of line indices delimiting the edge

|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | 4         | 3 |
| c4 | $-\infty$ | 5 |
| c5 | 5         | 3 |

CUT Lines C  
 Indexes of supporting lines




|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 5 |
| c4 | 3 |
| c5 | 4 |

Stack S  
 Ready vertex first edge idx

|    |
|----|
|    |
|    |
| c3 |
| c1 |



# 4c) Update the horizon trees – UHT and LHT

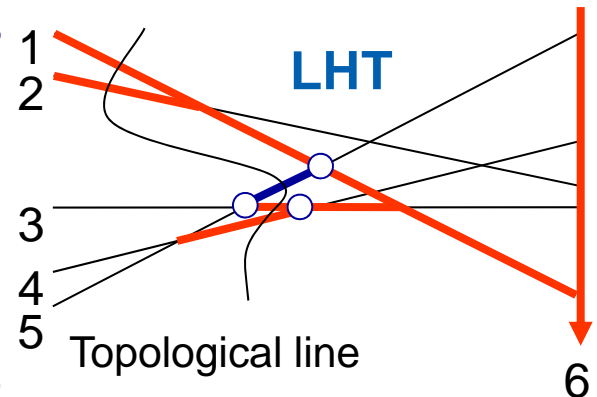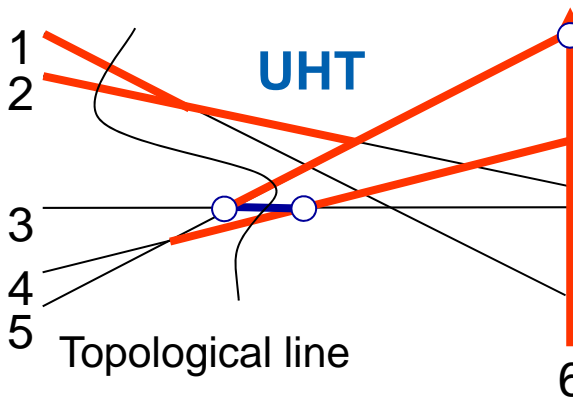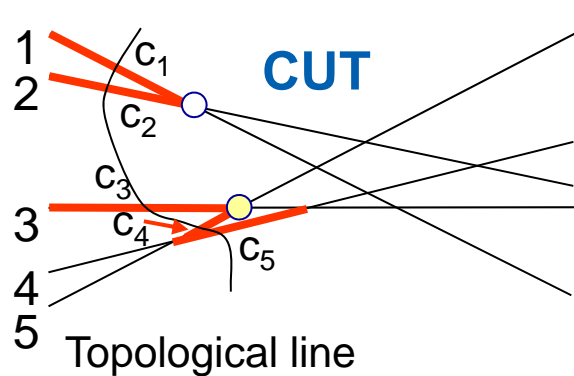

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | 5         | 4         |
| 4 | 5         | 6         |
| 5 | 3         | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | 5         | 1         |
| 4 | 5         | 3         |
| 5 | 3         | 1         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
 Pairs of line indices delimiting the edge

|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | 4         | 3 |
| c4 | $-\infty$ | 5 |
| c5 | 5         | 3 |

CUT Lines C  
 Indexes of supporting lines




|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 5 |
| c4 | 3 |
| c5 | 4 |

Stack S  
 Ready vertex first edge idx

|    |
|----|
|    |
|    |
| c3 |
| c1 |



# 4d) Determine new cut edges endpoints

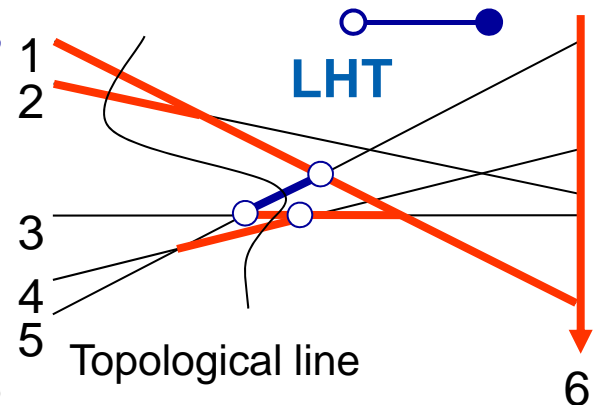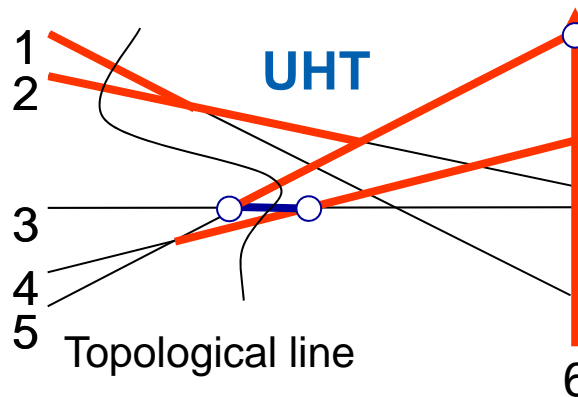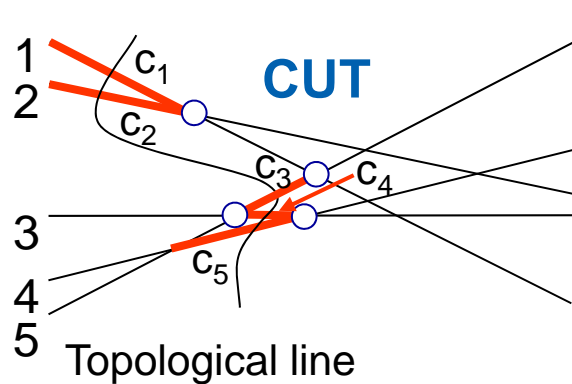

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | 5         | 4         |
| 4 | 5         | 6         |
| 5 | 3         | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | 5         | 1         |
| 4 | 5         | 3         |
| 5 | 3         | 1         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
Pairs of line indices delimiting the edge

|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | 3         | 1 |
| c4 | 5         | 4 |
| c5 | 5         | 3 |


CUT Lines C  
Indexes of supporting lines

|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 5 |
| c4 | 3 |
| c5 | 4 |

Stack S  
Ready vertex first edge idx


|    |
|----|
|    |
|    |
| c3 |
| c1 |

Intersect the trees – take the shorter edge





# 4e) Intersect with neighbors – push into S

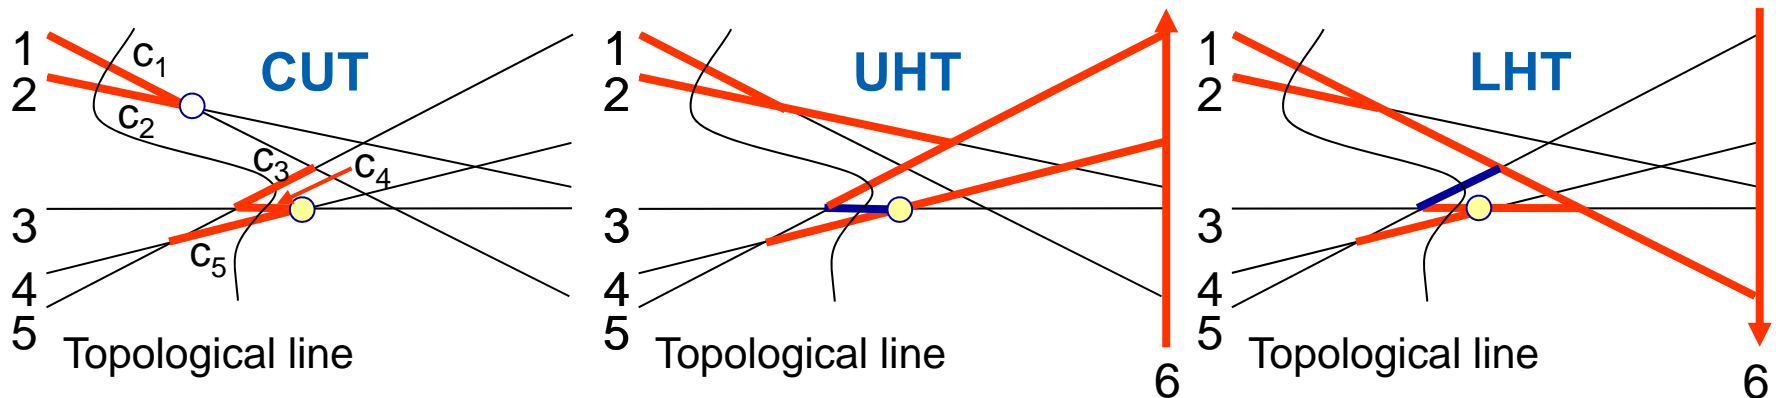

Array of line equations E  
 $y = a_i x + b$

|   |       |       |
|---|-------|-------|
| 1 | $a_1$ | $b_1$ |
| 2 | $a_2$ | $b_2$ |
| 3 | $a_3$ | $b_3$ |
| 4 | $a_4$ | $b_4$ |
| 5 | $a_5$ | $b_5$ |

UHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 2         |
| 2 | $-\infty$ | 5         |
| 3 | 5         | 4         |
| 4 | 5         | 6         |
| 5 | 3         | 6         |
| 6 | $-\infty$ | $+\infty$ |

LHT array  
 Delimiting lines indices

|   |           |           |
|---|-----------|-----------|
| 1 | $-\infty$ | 6         |
| 2 | $-\infty$ | 1         |
| 3 | 5         | 1         |
| 4 | 5         | 3         |
| 5 | 3         | 1         |
| 6 | $+\infty$ | $-\infty$ |

CUT edges N  
 Pairs of line indices delimiting the edge

|    |           |   |
|----|-----------|---|
| c1 | $-\infty$ | 2 |
| c2 | $-\infty$ | 1 |
| c3 | 3         | 1 |
| c4 | 5         | 4 |
| c5 | 5         | 3 |

CUT Lines C  
 Indexes of supporting lines

|    |   |
|----|---|
| c1 | 1 |
| c2 | 2 |
| c3 | 5 |
| c4 | 3 |
| c5 | 4 |

Stack S  
 Ready vertex  
 first edge idx

|    |
|----|
| c4 |
| c1 |



# Topological sweep algorithm



---

## TopoSweep( $L$ )

*Input:* Set of lines  $L$  sorted by slope ( $-90^\circ$  to  $90^\circ$ ), simple, not vertical

*Output:* All parts of an Arrangement  $A(L)$  detected and then destroyed

1. Let  $C$  be the **initial (leftmost) cut** – lines in increasing order of slope
2. Create the **initial UHT and LHT** incrementally:
  - a) UHT by inserting lines in decreasing order of slope
  - b) LHT by inserting lines in increasing order of slope
3. By consulting UHT and LHT
  - a) Determine the right endpoints  $N$  of all edges of the **initial cut  $C$**
  - b) Store neighboring **lines with common endpoints into stack  $S$**   
*(ready vertices)*
4. Repeat until stack not empty
  - a) Pop next ready vertex from stack  $S$  (its upper edge  $c_i$ )
  - b) Swap these lines within the cut  $C$  ( $c_i \leftrightarrow c_{i+1}$ )
  - c) Update the horizon trees UHT and LHT
  - d) Consulting UHT and LHT determine new cut edges endpoints  $N$
  - e) If new neighboring edges share an endpoint  $\rightarrow$  push them on  $S$

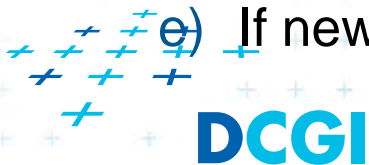

# Getting of cut edges from UHT and LHT

---

- for lines  $i = 1$  to  $n$ 
  - Compare UHT and LHT edges on line  $i$
  - Set the cut lying on edge  $i$  to the **shorter edge of these**
- Order of the cuts along the sweep line
  - Order changes at the intersection  $v$  only (neighbors)
  - Order of remaining cuts not incident with intersection  $v$  does not change
- After changes of the order, test the neighbors for intersections
  - Store intersections right from sweep line into the stack



# Complexity

---

- $O(n^2)$  intersections  
=>  $O(n^2)$  events (elementary steps)
- $O(1)$  amortized time for one step  
=>  $O(n^2)$  time for the algorithm

## Amortized time

= even though a single elementary step can take more than  $O(1)$  time, the total time needed to perform  $O(n^2)$  elementary steps is  $O(n^2)$ , hence the average time for each step is  $O(1)$ .



# References

---

- [Berg] Mark de Berg, Otfried Cheong, Marc van Kreveld, Mark Overmars: Computational Geometry: Algorithms and Applications, Springer-Verlag, 3rd rev. ed. 2008. 386 pages, 370 fig. ISBN: 978-3-540-77973-5, Chapters 8., <http://www.cs.uu.nl/geobook/>
- [Mount] David Mount, - CMSC 754: Computational Geometry, Lecture Notes for Spring 2007, University of Maryland, Lectures 8,15,16,31, and 32. <http://www.cs.umd.edu/class/spring2007/cmsc754/lectures.shtml>
- [Edelsbrunner] Edelsbrunner and Guibas. Topologically sweeping an arrangement. TR 9, 1986, Digital [www.hpl.hp.com/techreports/Compaq-DEC/SRC-RR-9.pdf](http://www.hpl.hp.com/techreports/Compaq-DEC/SRC-RR-9.pdf)
- [Rafalin] E. Rafalin, D. Souvaine, I. Streinu, "Topological Sweep in Degenerate cases", in Proceedings of the 4th international workshop on Algorithm Engineering and Experiments, ALENEX 02, in LNCS 2409, Springer-Verlag, Berlin, Germany, pages 155-156. <http://www.cs.tufts.edu/research/geometry/other/sweep/paper.pdf>





**OI-OPPA. European Social Fund  
Prague & EU: We invest in your future.**

---