

Linked Data

Petr Křemen

petr.kremen@fel.cvut.cz

April 25, 2014



Outline

1 Linked Data

- Core Linked Data
- Creating Linked Data
 - Tools for Getting and Interlinking Data
- Publishing Linked Open Data
- Licensing Open Data



1

Linked Data

- Core Linked Data
- Creating Linked Data
- Tools for Getting and Interlinking Data
- Publishing Linked Open Data
- Licensing Open Data


Linked Data



Linked Data [2] is a method for publishing structured and interlinked data on the web, building up on URLs, HTTP and RDF technologies.



Linking Open Data cloud diagram

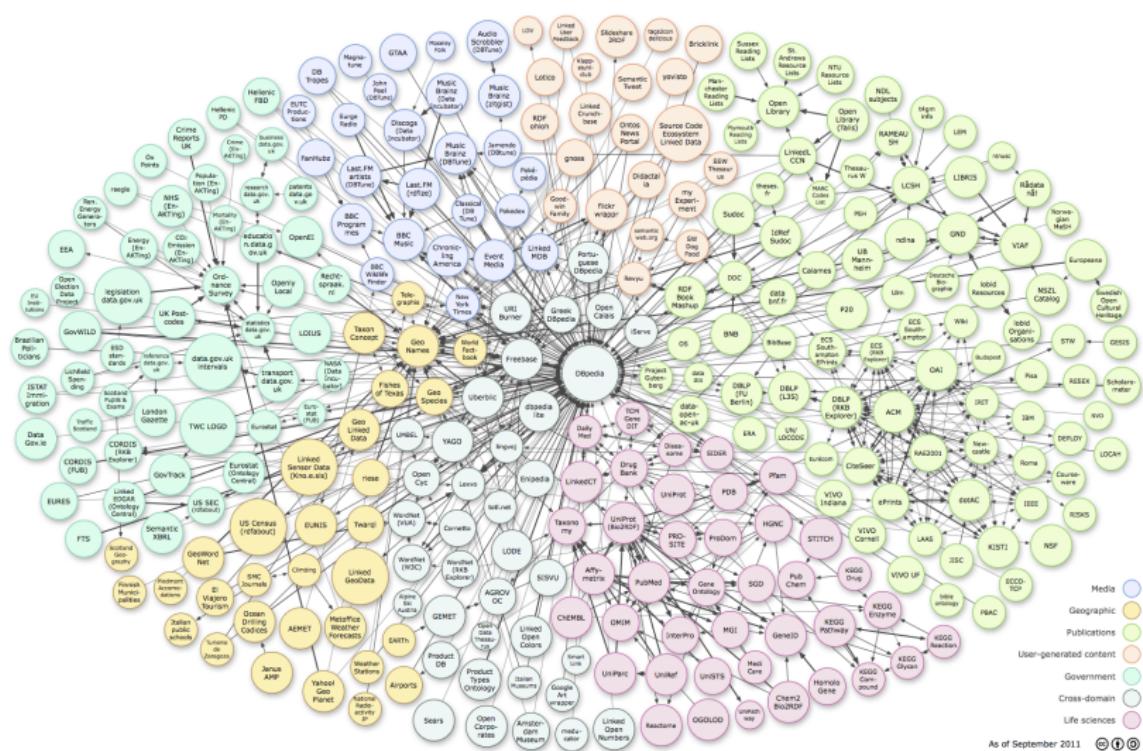

... by R.Cyganiak and A.Jentzsch. <http://lod-cloud.net/>, 2011

Petr Křemen (petr.kremen@fel.cvut.cz)

Linked Data

April 25, 2014

4 / 33

Statistics for the Linked Data Cloud

Domain	Number of datasets	Triples
Media	25	1,841,852,061
Geographic	31	6,145,532,484
Government	49	13,315,009,400
Publications	87	2,950,720,693
Cross-domain	41	4,184,635,715
Life sciences	41	3,036,336,004
User-generated content	20	134,127,413
	295	31,634,213,770

(in 2011)

Online formalized statistics are available at <http://stats.lod2.eu>.



Core Linked Data

1

Linked Data

- Core Linked Data
- Creating Linked Data

- Tools for Getting and Interlinking Data

- Publishing Linked Open Data
- Licensing Open Data



Classical Web vs. Semantic Web

- semantic web (RDF) links things, not just documents,

Example

RDF connects a person described within one document with its friends described in another document, while HTML links only these two documents.

- semantic web (hyper)links are typed

Example

RDF tells what kind of relationship between the two persons is (e.g. is-friend-of), while HTML hyper-links do not.



Linked Data Principles

- ① Use URIs as names for things.
- ② Use HTTP URIs so that people can look up those names.
- ③ When someone looks up a URI, provide useful information, using the standards (RDF, SPARQL).
- ④ Include links to other URIs, so that they can discover more things.

(Tim Berners-Lee, 2009 – <http://www.w3.org/DesignIssues/LinkedData.html>)

URIs satisfying the third point are **derefencable**.



Document vs. its. Content

When designing a URI scheme it is necessary to ensure proper distinction between a **document** and its **content**

Example

```
@prefix people: <http://example.com/people/>
people:John people:likes people:Mary
```


Is <http://example.com/people/Mary> a web document or a resource ? (Consider semantic consequences of each option).

This is handled by two strategies – 303 URIs and Hash URIs, each being suitable for different scenarios.



303 URIs

- 303 URIs are of the form `http://id.example.org/people/Alice`
- HTTP server sends 303 redirect to the corresponding **document** of the requested **resource**.
- HTTP client makes another request, based on Accept headers, the RDF/HTML version is delivered.

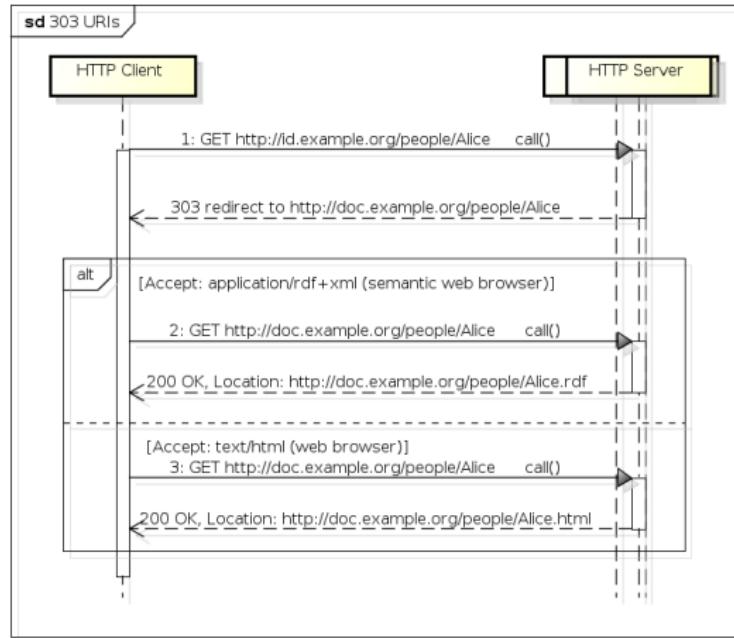


powered by Astah



Hash URLs

- Hash URLs are of the form `http://example.org/people#Alice`
- HTTP server sends the whole **document** of either RDF or HTML type based on Accept headers.
- Within the document, the HTTP client gets the particular entity after the hash symbol.

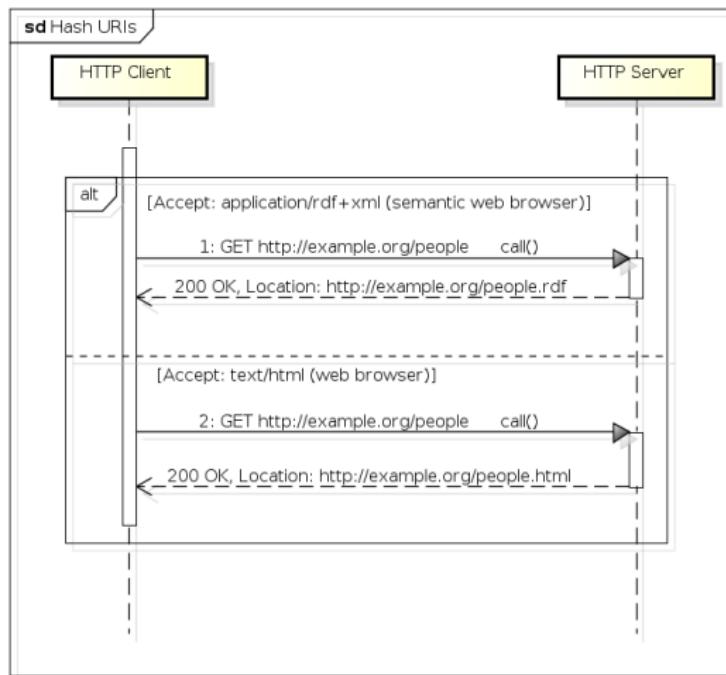

powered by Astah



303 URLs vs. Hash URLs

Hash URLs are suitable for small datasets that will hardly grow up,

303 URLs are suitable for large datasets for the sake of good performance.

Reason

The fragment part of an URL (after #) is evaluated on the HTTP client (not the HTTP server), so the HTTP client must fetch all data first and then filter them for the subsequent use locally.



Creating Linked Data

1

Linked Data

- Core Linked Data
- Creating Linked Data

● Tools for Getting and Interlinking Data

- Publishing Linked Open Data
- Licensing Open Data



Dereferencability of URIs

To make a URI dereferencable there are a few options:

Custom HTTP server – run a generic HTTP server (like Apache2) hosting your domain and configure the corresponding responses

Linked Data Platform – use existing Linked Data Platform

- for publishing RDF data backed by a SPARQL endpoint (Pubby)
- for publishing RDBMS data as Linked Data (D2R)
- for creating Linked Data Applications (Linked Data Platforms [1], like Callimachus)

When designing a URI scheme, you should consider making them as Cool URIs [4]. PURL (<http://purl.org>) might be used to ensure stability of the identifier.



Developing Custom Linked Data

- ① Find relevant vocabularies/ontologies using existing services – e.g. DBpedia, Watson, Sindice (see section 1)
- ② Extend these vocabularies/ontologies by introducing new resources in the namespace under your control.
- ③ Develop the dataset in RDF model (create the data/publish existing RDBMS data, etc.)
- ④ Intelink the dataset to existing data (search suitable datasets using similar techniques as in step 1)
- ⑤ Publish the Data using one of the options discussed in section 3.



Linking other data

There are a few types of links to other datasets.

Relationship links connect two individuals/objects (like people, places, animals) with some relationship (like knows, bornIn) from different datasets.

Identity links are placed to say that two individuals/objects are identical (e.g. describing one person in two datasets under different identities)

Vocabulary links point from data to the definitions (schema/ontology)



Suitable Vocabularies

FOAF (Friend Of A Friend) <http://xmlns.com/foaf/0.1/> – linking people and information about them

VCard (<http://www.w3.org/2006/vcard/ns#>) – describing people and organizations from the business perspective

Relationship (<http://purl.org/vocab/relationship>) – describing relationships between people

Basic GEO (<http://www.w3.org/2003/01/geo>) – describing basic spatial locations (more in lecture on Semantic GIS)

Dublin Core (<http://dublincore.org/documents/dcmi-terms>) – events and annotation of documents

Event Ontology (<http://purl.org/NET/c4dm/event.owl>) – temporal events

GoodRelations (<http://purl.org/goodrelations/v1#>) – E-commerce schema for describing products and their offers

VOID (<http://rdfs.org/ns/void#>) – description of a dataset

DOAP (Description Of A Project) (<http://usefulinc.com/ns/doap#>) – description of open-source projects

Sitemaps (<http://www.sitemaps.org/schemas/sitemap/0.9>) – semantic sitemaps vocabulary



Tools for Getting and Interlinking Data

1

Linked Data

- Core Linked Data
- Creating Linked Data

● Tools for Getting and Interlinking Data

- Publishing Linked Open Data
- Licensing Open Data



Apache Any23

Apache Any23 (<http://any23.apache.org/>) is an online service¹ for extracting structured data (RDF/XML, CSV) into arbitrary RDF format.

inputs – e.g. RDF/XML, Turtle, N3, RDFa, CSV

outputs – any RDF format

Example

```
http://any23.org/any23/?format=ttl&uri=http://dbpedia.org/resource/Praha  
http://any23.org/any23/best/https://www.linkedin.com/in/jaracimrman
```

Task

Try to extract your LinkedIn/Twitter profile information into Turtle.

¹also available as CLI and library



LDSpider


- LDSpider (<https://code.google.com/p/ldspider>) is a linked-data crawler (available as CLI and library). It takes an initial RDF resource and returns an RDF graph representing the resource by dereferencing the URIs to the configurable depth.
- More in tutorials.



Watson

Watson (<http://watson.kmi.open.ac.uk>) is a RDF document indexing and search engine .

- input – a set of keywords
- output – a set of RDF documents containing the keywords in their textual fields (e.g. `rdf:label`)

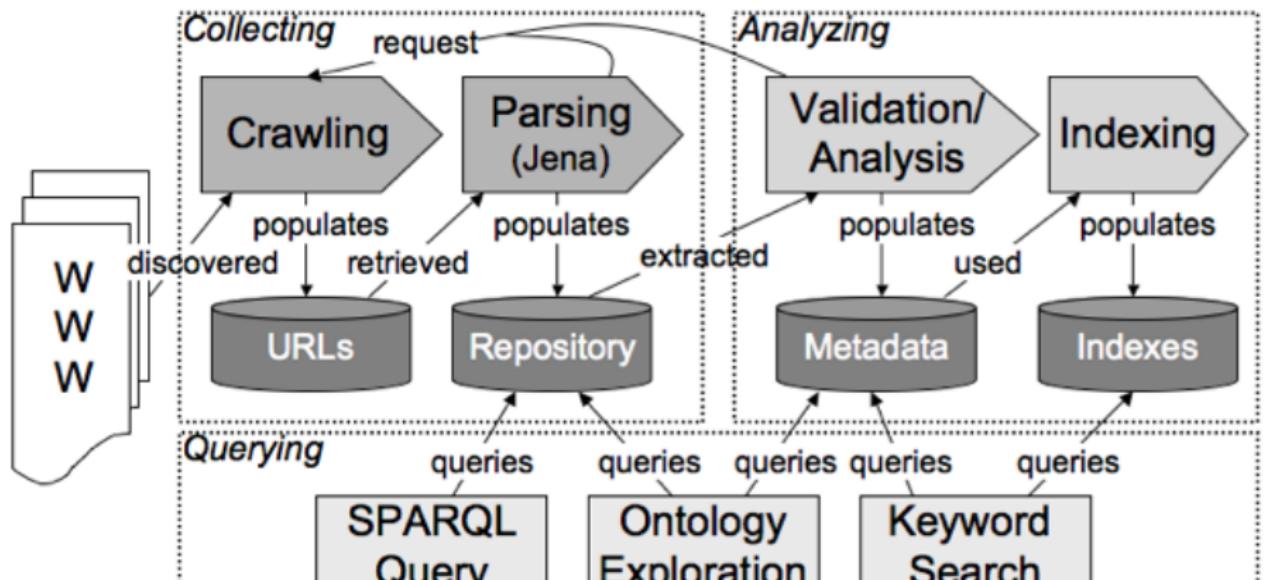

Sindice

Sindice (<http://sindice.com>) is the Semantic Web Index indexes semantic web.



Sig.ma

Sig.ma (<http://sig.ma>) is a Linked Data mashup tool

- input – a list of keywords
- output – a pretty-printed RDF graph subject of which is a resource “labeled by the input list of keywords”.



Jara Cimrman

picture:





Help About Support

Version 2.0.8

Order Options Use ↻

Sources	Approved	Rejected
27	0	0
Pending ↻		
1 Jara Cimrman	5 facts 2012-06-05	
http://dbpedia.org/resource/Jara_Cimrman		
2 http://yago-knowledge.or...	0 facts undefined	
http://yago-knowledge.org/resource/Jara_Cimrman		
3 Jara da Cimrman	7 facts 2014-04-24	
http://dbpedia.org/resource/Jara_da_Cimrman		
4 http://yago-knowledge.or...	0 facts undefined	
http://yago-knowledge.org/resource/Jara_Cimrman		
5 Jara Cimrman Lying, Slee...	7 facts 2014-04-24	
http://dbpedia.org/resource/Jara_Cimrman		
6 Jára Cimrman	12 facts 2014-04-24	
http://dbpedia.org/resource/19%C3%A1ra_Cim...		
7 Jara Cimrman Tour Dates ...	11 facts 2014-04-24	
http://www.songkick.com/artists/92844-jar...		
8 Jára Cimrman leží, spí ...	9 facts 2010-10-28	
http://www.rottenmattoes.com/m/jara-cimr...		
9 Jara Cimrman leží, spí ...	7 facts 2014-04-24	
http://dbpedia.org/resource/Jara_Cimrman		
10 http://www.kat.ph/jara-c...	0 facts undefined	
http://www.kat.ph/jara-cimrman-akt-t686739.html		
11 Songtext von Jára Cimrma...	2 facts 2012-05-25	
http://www.songtexte.com/songtext/t/jara-c...		
12 Songtext von Jára Cimrma...	8 facts 2014-04-24	

comment: Find Jara Cimrman live concert tour dates, tickets, reviews, and more on Songkick. Be the first to know when Jara Cimrman is playing live in your town! ↻

is creator of: [Show 147 values ↻](#)

app id: 123694567642603 [10]

fbladminid: 1106591.615860 [8]

fblmapp id: 308540029059 [7]

326803141017 [8]

gender: male [8]

icon: <http://www1.sil-static.com/images/favicon.ico> [7]

<http://images.rottentomatoescdn.com/images/icons/favicon.ico> [8]

<http://www.songtexte.com/img/icon-large.ico> [12,21,22,23]

identifier: [dbpedia.org/resource/Jara_Cimrman](#) [1]

[dbpedia.org/resource/Jara_da_Cimrman](#) [3]

[dbpedia.org/resource/Jara_Cimrman_Lying_Sleeping](#) [6]

musicbrainz_myanalist#91231b2-fa72-46cc-9fe7-ebc7bd42afbd#_ [8]

[dbpedia.org/resource/19%C3%A1ra_Cimrman](#) [6]

www.songkick.com/artists/92844-jara-cimrman [7]

www.rottentomatoes.com/m/jara-cimrman-lezci-sociaria-cimrman-kino-sleznina/ [8]



Publishing Linked Open Data

1

Linked Data

- Core Linked Data
- Creating Linked Data

● Tools for Getting and Interlinking Data

- Publishing Linked Open Data
- Licensing Open Data



Linked Data Publishing Checklist

- Does your data set links to other data sets?
- Do you provide provenance metadata? (e.g. VOID descriptions)
- Do you provide licensing metadata?
- Do you use terms from widely deployed vocabularies?
- Are the URIs of proprietary vocabulary terms dereferenceable?
- Do you map proprietary vocabulary terms to other vocabularies?
- Do you provide data set-level metadata?
- Do you refer to additional access methods?



Five Stars

- ★ Available on the web (whatever format) but with an open licence, to be Open Data
- ★★ Available as machine-readable structured data (e.g. excel instead of image scan of a table)
- ★★★ All the above, plus – Non-proprietary format (e.g. CSV instead of excel)
- ★★★★ All the above, plus – Use open standards from W3C (RDF and SPARQL) to identify things, so that people can point at your stuff
- ★★★★★ All the above, plus – Link your data to other people's data to provide context

(Tim Berners-Lee, 2009 – <http://www.w3.org/DesignIssues/LinkedData.html>)



CKAN and DataHub

CKAN (<http://ckan.org/>) is an open-source data portal for publishing, sharing and search through (linked) data.

It is prominently hosted

at <http://datahub.io>.

Datasets on DataHub can be submitted to the Linked Data Cloud.

The screenshot shows the DataHub website's dataset search interface. At the top, there is a navigation bar with links for Datasets, Organizations, About, Blog, Help, and a search bar. Below the navigation, the page title is "/ Datasets". A sidebar on the left contains filters for "Organizations" (Global (5)) and "Tags" (culturalHeritage (6), publication (4), culture (4), cultural (4), published-by-producer (3), museum (3), heritage (3), publicDomain (2), passage-type:catalog (2)). There is also a link to "Show More Organizations". The main content area displays a search result for "cultural heritage" with 14 datasets found. The first dataset listed is "Swedish Open Cultural Heritage" (SOCH), which is described as a collection of over 3.4 million cultural heritage objects from various museums and archives. Below the dataset details, there are links for "HTML", "application/rdf+xml", and "sparql endpoint". Other datasets listed include "Culture Grid", "Flickr - The Commons", "Amsterdam Museum as Linked Open Data in the Europeana Data Model", and "British Museum Collection". Each dataset entry includes a brief description, a link to its page, and a "sparql endpoint" link.

Datasets search

<http://datahub.io/dataset?q=cultural+heritage>

Linked Data Platforms

Pubby is a simple Linked Data publication server connectable to SPARQL endpoints,

Callimachus is an application server for linked data applications. To be explored in the tutorials,

Marmotta is a platform for publishing Linked Data (contributed from Linked Media Framework),

D2R is a platform for publishing relational database data in the form of Linked Data.



Licensing Open Data

1

Linked Data

- Core Linked Data
- Creating Linked Data
- Tools for Getting and Interlinking Data
- Publishing Linked Open Data
- **Licensing Open Data**



Open Definition (OD)

Choosing an appropriate license is a crucial point influencing possibilities of future reuse of your data as well as defining your responsibility for the data. Linked data can be used for enterprise (closed) data, as well as open data. Let's discuss licensing of the latter.

Open Definition – A piece of data or content is open if anyone is free to use, reuse, and redistribute it — subject only, at most, to the requirement to attribute and/or share-alike. – cit. from <http://opendefinition.org>



Selected OD-Conformant Creative Commons Licenses


The following licenses apply to both *data* (in the sense of a full database), as well as their *content* (in the sense of particular single statements from these databases).

attribution (BY) using the data/content requires to give proper credit to the author of the original data/content,

share-alike (SA) derivative works require using the same license as their original,

no-derivative (ND) forbids making derivative works,

non-commercial (NC) forces non-commercial derivation/redistribution.

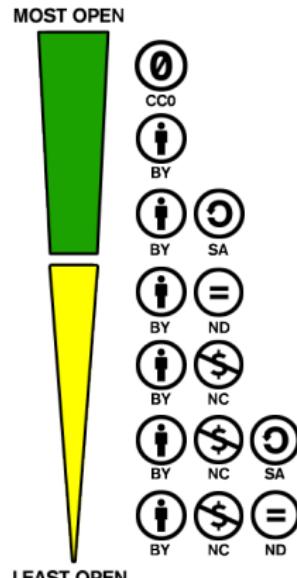

(from <http://creativecommons.org/examples>)



Creative Commons Licenses

Creative Commons CCZero (CC0) license² enforces neither attribution, nor share-alike.

- e.g. Europeana,

<http://datahub.io/dataset/europeana-sparql>

Creative Commons Attribution (CC-BY-4.0) license³ enforces attribution, but not share-alike.

- e.g. PLOS⁴, <http://datahub.io/dataset/plos>

Creative Commons Attribution (CC-BY-SA-4.0) license⁵ enforces attribution, as well as share-alike.

- e.g. DBPedia⁶, <http://dbpedia.org>

²<http://creativecommons.org/publicdomain/zero/1.0/legalcode>

³<http://creativecommons.org/licenses/by/4.0/>

⁴uses an older version of CC-BY

⁵<http://creativecommons.org/licenses/by-sa/4.0/>

⁶uses an older version of CC-BY-SA



References

1

Linked Data

- Core Linked Data
- Creating Linked Data

- Tools for Getting and Interlinking Data

- Publishing Linked Open Data
- Licensing Open Data



- [1] John Arwe, Ashok Malhotra, and Steve Speicher. *Linked Data Platform 1.0*. W3C Working Draft.
<http://www.w3.org/TR/2014/WD-ldp-20140311/>. W3C, Mar. 2014.
- [2] Tom Heath and Christian Bizer. *Linked Data: Evolving the Web into a Global Data Space*. 1st. Morgan & Claypool, 2011. ISBN: 9781608454303. URL: <http://linkeddatabook.com/>.
- [3] Robert Isele et al. “LDSpider: An open-source crawling framework for the Web of Linked Data”. In: *Proceedings of 9th International Semantic Web Conference (ISWC 2010) Posters and Demos*. 2010. URL: <http://iswc2010.semanticweb.org/pdf/495.pdf>.
- [4] Leo Sauermann and Richard Cyganiak. *Cool URIs for the Semantic Web*. W3C Note.
<http://www.w3.org/TR/2008/NOTE-cooluris-20081203/>. W3C, Dec. 2008.

