

# Introduction to C Programming

Jan Faigl

Department of Computer Science

Faculty of Electrical Engineering

Czech Technical University in Prague

Lecture 01

**B3B36PRG – Programming in C**



# Overview of the Lecture

- Part 1 – Course Organization
  - Course Organization
  - Course Goals and Means of Achieving the Course Goals
- Part 2 – Introduction to C Programming
  - Program in C
  - Values and Variables
  - Standard Input/Output

*K. N. King: chapters 1, 2, and 3*



# Part I

## Part 1 – Course Organization



# Outline

- Course Organization
- Course Goals and Means of Achieving the Course Goals



# Course and Lecturer

## B3B36PRG – Programming in C

- Course web page <https://cw.fel.cvut.cz/wiki/courses/b3b36prg>
- Submission of the homework – **BRUTE** Upload System  
<https://cw.felk.cvut.cz/brute> and individually during the labs.

- Lecturer:

- prof. Ing. **Jan Faigl**, Ph.D.



- Department of Computer Science – <http://cs.fel.cvut.cz>
    - Artificial Intelligence Center (AIC)
    - Center for Robotics and Autonomous Systems (CRAS)
    - Computational Robotics Laboratory (ComRob)

<http://aic.fel.cvut.cz>

<http://robotics.fel.cvut.cz>

<http://comrob.fel.cvut.cz>



# Course Organization

- B3B36PRG – Programming in C; Completion: Z,ZK; Credits: 6

*Z – ungraded assessment, ZK – exam*

1 ECTS credit is about 25–30 hours per semester, six credits is about **150–180 hours per semester**.

- Contact part (lecture and labs): 3 hours per week, 42 hours in total that is only about **25% of the expected effort** supposed to be dedicated to the course.
- Exam including preparation: *10 hours*.
- Home preparation (first **book reading** and followed by homework) approx **9 hours per week** *Median load*.

---

- **Ongoing work during the semester**

- Homeworks *mandatory, optional, and bonus parts.*
- **Semestral project** – multi-thread computational applications.

- Exam test and implementation exam – verification of the acquired knowledge and skills from the teaching part of the semester. *An independent work with the computer in the lab (class room).*

- 
- Attendance to labs, submission of homework, and semestral project.

- 
- **Consultation** - If you do not know, or spent too much time with the homework, consult with the instructor/lecturer.

- **Maximize the contact time during labs and lectures, ask questions, and discuss.**



## Course Evaluation

Point Source	Maximum Points	Required Minimum Points		
Assignment	25	<i>All assignments must be turned in.</i>	} <b>25</b>	
Bonus Assignment	10			-
Labs (MCU)	6			-
Labs Quizes	4			-
Semester project	30		<b>10</b>	
Exam test	20		† <b>10</b>	
Implementation exam	20		<b>10</b>	
Total	115	<b>55</b>		

† If you fail the implementation and score exam test for 13 or more points, the following exam term is only for the implementation, and vice versa, if you do not ask otherwise.

**55 points is solid E, not borderline, but solid.** The exam test (and implementation) is not corrected but evaluated, the scoring is upper bound, i.e., it might contain less points than evaluated.

- The course can be passed with **ungraded assessment** and **exam**.
- **All homework must be submitted and they have to pass the mandatory assessment.**

<https://cw.fel.cvut.cz/wiki/courses/b3b36prg/resources/exam>



## Resources and Literature

### ■ Textbook

*„C Programming: A Modern Approach“ (King, 2008)*



C Programming: A Modern Approach, 2nd Edition, *K. N. King*,  
W. W. Norton & Company, 2008, ISBN 860-1406428577



*The main course textbook*

### ■ During the first weeks, take your time and read the book!

*The first homework HW01 deadline is on 15.03.2025!*

- 
- Lectures – support for the textbook, slides, comments, and **your notes**.

*Demonstration source codes are provided as a part of the lecture materials!*

- Laboratory exercises – gain practical skills by doing homework (yourself).





## Resources and Literature

### ■ Textbook

*„C Programming: A Modern Approach“ (King, 2008)*



C Programming: A Modern Approach, 2nd Edition, K. N. King,  
W. W. Norton & Company, 2008, ISBN 860-1406428577



*The main course textbook*

### ■ During the first weeks, take your time and read the book!

*The first homework HW01 deadline is on 15.03.2025!*

---




### ■ Lectures – support for the textbook, slides, comments, and **your notes**.


*Demonstration source codes are provided as a part of the lecture materials!*

### ■ Laboratory exercises – gain practical skills by doing homework (yourself).



## Further Books

-  Programming in C, 4th Edition,  
*Stephen G. Kochan*, Addison-Wesley, 2014,  
ISBN 978-0321776419
  -  21st Century C: C Tips from the New School, *Ben Klemens*,  
O'Reilly Media, 2012,  
ISBN 978-1449327149
  -  The C Programming Language, 2nd Edition (ANSI C) , *Brian W.  
Kernighan, Dennis M. Ritchie*, Prentice Hall, 1988 (1st edition –  
1978)
- 
-  Advanced Programming in the UNIX Environment, 3rd edition,  
*W. Richard Stevens, Stephen A. Rago* Addison-Wesley, 2013,  
ISBN 978-0-321-63773-4




## Further Resources



The C++ Programming Language, 4th Edition (C++11) ,  
*Bjarne Stroustrup*, Addison-Wesley, 2013, ISBN 978-0321563842



Introduction to Algorithms, 3rd Edition, *Cormen, Leiserson,  
Rivest, and Stein*, The MIT Press, 2009, ISBN 978-0262033848



Algorithms, 4th Edition , *Robert Sedgewick, Kevin Wayne*,  
Addison-Wesley, 2011, ISBN 978-0321573513



# Outline

- Course Organization
- Course Goals and Means of Achieving the Course Goals



## Course Goals

- **Master** (yourself) programming skills.
- **Acquire** knowledge of C programming language.
- **Acquire experience** of C programming to use it efficiently.
- **Gain experience** to read, write, and understand small C programs.
- **Acquire** programming habits to write
  - easy to read and understandable source codes
  - reusable programs.
- **Experience** programming with
  - Workstation/desktop computers – using services of operating system.  
*E.g., system calls, read/write files, input and outputs.*
  - Multithreaded applications.
  - Embedded applications – **STM32F446 Nucleo**.

**Labs, homework, exam**

*Your own experience!*



## Teaching Programming in B3B36PRG

- Our aim is to build your experience and develop your programming skills.
  - Programming vs. algorithmization;
  - Programming is the “craft” of how to implement an algorithm correctly.
  - **Functional is not enough - the program must be correct too!** *Expected input vs. what the user can input.*
- The learning load is therefore spread over the course of the semester.
  - Practice assignments and homework deadlines.
- Systematic development of programming skills throughout the semester is essential.

*Typically, there is time at the beginning of the semester to understand the principles (reading the textbook)!*
- Without knowing the constructs and basic commands, you cannot program effectively.
- Know and know how to use (not “stick”). *Dependence on whisperer or Co-pilot!*
  - Starting with relatively simple tasks to learn programming constructs and how to organize source code. *Code clarity and the ability to navigate code efficiently!*
  - *The assignments can be implemented based on the topics covered in the lectures/labs.*

Solutions with more advanced constructs may be more elegant(shorter), but may not provide the necessary insight.
  - In the first lectures we cover the necessary knowledge, which is further deepened.
    - Exercises complement the lectures and give more space for practical learning.
- You can choose a practical way of absorbing programming knowledge from examples, which is suitable to complement **theoretical preparation from textbook(s).**



## Overview of the Lectures

1. Course information, Introduction to C programming *K. N. King: chapters 1, 2, and 3*
2. Writing your program in C, control structures (loops), expressions *K. N. King: chapters 4, 5, 6, and 20*
3. Data types, arrays, pointer, memory storage classes, function call *K. N. King: chapters 7, 8, 9, 10, 11, and 18*
4. Data types: arrays, strings, and pointers *K. N. King: chapters 8, 11, 12, 13, and 17*
5. Data types: Struct, Union, Enum, Bit fields. Preprocessor and Large Programs  
*K. N. King: chapters 10, 14, 15, 16, and 20*
6. Input/Output – reading/writing from/to files and other communication channels, Standard C library – selected functions  
*K. N. King: chapters 21, 22, 23, 24, 26, and 27*
7. Parallel and multi-thread programming – methods and synchronizations primitives
8. Multi-thread application models, POSIX threads and C11 threads
9. C programming language wrap up, examples such as linked lists
10. *Accuracy and Speed of Calculation*
11. *ANSI C, C99, C11 and differences between C and C++* Introduction to C++.  
*Reserve (Thursday's schedule)*
12. *Quick introduction to C++*
13. *Resource Ownership in C++*

All supporting materials for the lectures are available at  
<https://cw.fel.cvut.cz/wiki/courses/b3b36prg/start>

Read slides, **textbook**, or even watch the recorded lectures before the lecture contact time!



# Homeworks

- 1+7 homework - seven for the workstation.

<https://cw.fel.cvut.cz/wiki/courses/b3b36prg/hw/start>

- |   |                      |                   |
|---|----------------------|-------------------|
| 1. HW 00 – <b>Testing</b> (1 point)   |                      | 1 h               |
| 2. HW 01 – <b>ASCII Art</b> (2 points)  |                      | 3 h               |
| <b>Coding style penalization – up to -100% from the gain points.</b>                |                      |                   |
| 3. HW 02 – <b>Prime Factorization</b> (2 points + 4 points bonus)                   | <b>Coding style</b>  | 4 h + 4 h (bonus) |
| 4. HW 03 – <b>Caesar Cipher</b> (2 points + 2 points bonus)                         | <b>Coding style</b>  | 3 h + 3 h (bonus) |
| 5. HW 04 – <b>Text Search</b> (2 points + 3 points optional)                        |                      | 5 h               |
| 6. HW 05 – <b>Matrix Calculator</b> (2 points + 3 points optional + 4 points bonus) | <b>Coding style!</b> | 6 h + 5 h (bonus) |
| 7. HW 06 – <b>Circular Buffer</b> (2 points + 2 points optional)                    |                      | 5 h               |
| 8. HW 07 – <b>Linked List Queue with Priorities</b> (2 pts + 2 pts optional)        |                      | 7 h               |

- All homework must be submitted to award an ungraded assessment

*Total about 42–47 hours.*

**Late submission is penalized!**

- Coding style needs to be learned, penalization is to motivate you thinking about it and learn the craft of coding.

**If you improve over the semester, penalization can be compensated at the end.**





## Semestral Project

- A combination of control and computational applications with multithreading, communication, and user interaction.

<https://cw.fel.cvut.cz/wiki/courses/b3b36prg/semestral-project/start>

- Mandatory tasks can be awarded up to **20 points**.
- Bonus part can be awarded for an additional **10 points**.

Up to 30 points in the total for the semestral project.

- **Minimum required points: 10!**

Deadline – best before 16.05.2025@23:59 CEST.

Further updates and additional points might be possible!

Deadline – 18.05.2025@23:59 CEST.


- The expected required time to finish the semestral project is about 30–50 hours.



## Expected and Reported Times Needed to Complete Homeworks

- B3B36PRG - Average sum of the reported median times.
  - **97 hours** (with HW05B ~ 5 h, SEM ~ 49 h).
- *6 credits is about 150–180 hours that is*
  - 42 h contact part
  - 10 h exam, and
  - about 100–128 hours for homework.
- **Plan your work! Use the first weeks to read the textbook!**

Reported (in the literature) programming courses success rate is about 30%–75%. It is usually at the end of other STEM courses. PRG is not an exception. 2023/2024: 69% (100% of awarded credits)  
 2022/2023: 73% (97% of awarded credits)  
 2021/2022: 60% (97% of awarded credits)  
 2020/2021: 60% (95% of awarded credits)

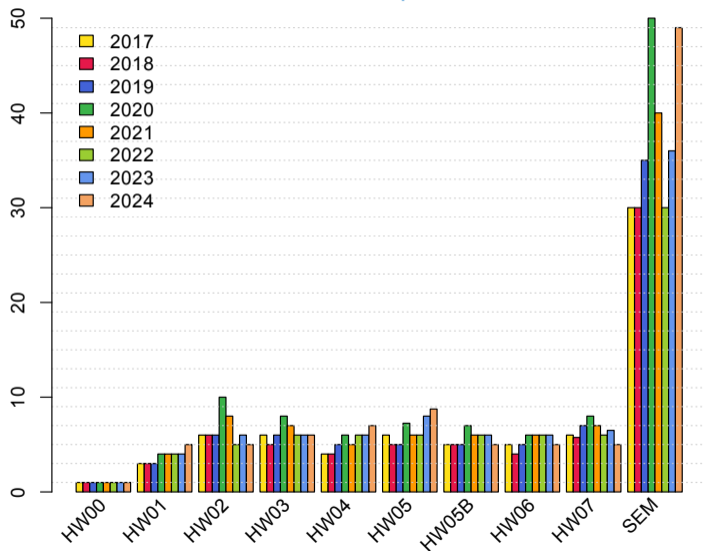

## Homework Assignment – BRUTE

- **BRUTE** – Bundle for Reservation, Uploading, Testing and Evaluation
  - Formal check – compiling the program.
  - Functionality and correctness testing – **checking output for a given input.**
    - Public inputs and corresponding outputs / non-public inputs.
  - Test the program yourself before uploading it.
    - Using the available inputs and outputs.
    - Creating your own inputs and debugging the program.
    - Creating inputs **with the included input generator.**
    - Verifying the output **with the attached test or reference program.**
- Understanding the code and checking possible states.
  - **For each line, you should be able to answer why it is there and what it does!**
  - For **each function or input retrieval** from the user, parse the possible input values or **function return values!**
    - If the input or return value is critical in terms of functionality, **check the input and/or the appropriate action**, e.g., output a message and exit the program.

For example, the expected input is a number, and the user enters something else.



## Tasks and BRUTE

- Tasks are not just about submitting an implementation that passes the BRUTE tests.

- The goal is not to submit tasks in BRUTE; it is to verify the program functionality.
- BRUTE is a tool to continuously check your progress and gain knowledge.
- The goal is to learn to **independently program** functional programs correctly.

- Tasks are all about gaining **gradual experience** with specific constructs.

- All of the task assignments have been implemented many times, and even generative AI can do it.

In this course, you have the opportunity to understand C programming through your own implementation of assignments. **The task successful submission is a means to reach the goal, not the goal itself.**

- Tasks are very similar in relative difficulty. It is important to solve the tasks independently and to learn the sub-skills. Absolutely, the tasks get progressively more and more difficult!
- Rather than struggling too long on your own, ask (on Discord), for practice or **consultation**.
- Tasks HW01–HW03 and HW05 are checked for correctness and code clarity.
  - Focused on consistency, readability, and **modularity** (splitting into functions).  
*In terms of training and learning, try to split even a seemingly trivial program into multiple functions.*
  - *The motivation is not to spend too much time with coding without significant progress.*



# Part II

## Part 2 – Introduction to C Programming



# Outline

- Program in C
- Values and Variables
- Standard Input/Output



# C Programming Language

- Low-level programming language.
- System programming language (operating system).  
*Language for (embedded) systems — MCU, cross-compilation.*
- A user (programmer) can do almost everything.  
*Initialization of the variables, release of the dynamically allocated memory, etc.*
- Very close to the hardware resources of the computer.  
*Direct calls of OS services, direct access to registers and ports.*
- Dealing with memory is crucial for correct behaviour of the program.  
*One of the goals of the PRG course is to acquire fundamental principles that can be further generalized for other programming languages. The C programming language provides great opportunity to become familiar with the memory model and key elements for writing efficient programs.*

**It is highly recommended to have compilation of your program fully under control.**

*It may look difficult at the beginning, but it is relatively easy and straightforward. Therefore, we highly recommend to use fundamental tools for your program compilation. After you acquire basic skills, you can profit from them also in more complex development environments.*



# C Programming Language

- Low-level programming language.
- System programming language (operating system).  
*Language for (embedded) systems — MCU, cross-compilation.*
- A user (programmer) can do almost everything.  
*Initialization of the variables, release of the dynamically allocated memory, etc.*
- Very close to the hardware resources of the computer.  
*Direct calls of OS services, direct access to registers and ports.*
- Dealing with memory is crucial for correct behaviour of the program.  
*One of the goals of the PRG course is to acquire fundamental principles that can be further generalized for other programming languages. The C programming language provides great opportunity to become familiar with the memory model and key elements for writing efficient programs.*

**It is highly recommended to have compilation of your program fully under control.**

*It may look difficult at the beginning, but it is relatively easy and straightforward. Therefore, we highly recommend to use fundamental tools for your program compilation. After you acquire basic skills, you can profit from them also in more complex development environments.*





## Writing Your C Program

- Source code of the C program is written in **text files**.
  - **Header files** usually with the suffix **.h**.
  - **Sources files** usually named with the suffix **.c**.

---
- Header and source files together with **declaration** and **definition** (of functions) support.
  - **Organization** of sources into several files (modules) and libraries.
  - **Modularity** – Header file declares a visible interface to others.
    - A description (list) of functions and their arguments without particular implementation.*
  - **Reusability**
    - Only the “interface” declared in the header files is needed to use functions from available binary libraries.

---
- Sources consists of **keywords**, language **constructs** such as **expressions** and programmer’s **identifiers**:
  - **variables** – named mamory space;
  - **function names** – named sequences of instructions).



## Escape Sequences

- Escape sequences for writing special symbols
  - `\o`, `\oo`, where `o` is an octal numeral
  - `\xh`, `\xhh`, where `h` is a hexadecimal numeral

```
1 int i = 'a';
2 int h = 0x61;
3 int o = 0141;
4
5 printf("i: %i h: %i o: %i c: %c\n", i, h, o, i);
6 printf("oct: \141 hex: \x61\n");
```

*E.g., `\141`, `\x61` [lec01/esqdh0.c](#)*

- `\0` – character reserved for the end of the text string (null character)



## Writing Identifiers in C

- Identifiers are names of variables (custom types and functions).

*Types and functions, viz further lectures.*

- Rules for the identifiers

- Characters a–z, A–Z, 0–9, and `_`.
- The first character is not a numeral.
- Case sensitive.
- Length of the identifier is not limited.

*First 31 characters are significant – depends on the implementation / compiler.*

- Keywords<sub>32</sub>

auto break case char const continue default do double else enum  
extern float for goto if int long register return short signed sizeof  
static struct switch typedef union unsigned void volatile while

C98

*C99 introduces, e.g., `inline`, `restrict`, `_Bool`, `_Complex`, `_Imaginary`.*

*C11 further adds, e.g., `_Alignas`, `_Alignof`, `_Atomic`, `_Generic`, `_Static_assert`, `_Thread_local`.*



# Simple C Program

```
1 #include <stdio.h>
3 int main(void)
4 {
5     puts("I like B3B36PRG!\n");
7     return 0;
8 }
```

lec01/program.c

Is the program correct? Or, strictly correct? See further!

- Source files are compiled by the compiler to the so-called **object files** usually with the suffix **.o**.

*Object code contains relative addresses and function calls or just references to function without known implementations.*

- The final executable program is created from the object files by the **linker**.



## Program Compilation and Execution

- Source file `program.c` is compiled into runnable form by the compiler, e.g., `clang` or `gcc`.

```
clang program.c
```

- There is a new file `a.out` that can be executed, e.g.,

```
./a.out
```

*Alternatively the program can be run only by `a.out` in the case the actual working directory is set in the search path of executable files*

- The program prints the argument of the function `printf()`.

```
./a.out
```

```
I like B3B36PRG!
```

- 
- If you prefer to run the program just by `a.out` instead of `./a.out` you need to add your actual working directory to the search paths defined by the environment variable `PATH`.

```
export PATH="$PATH: `pwd`"
```

*Notice, this is not recommended, because of potentially many working directories.*

- The command `pwd` prints the actual working directory, see `man pwd`.



## Program Compilation and Execution

- Source file `program.c` is compiled into runnable form by the compiler, e.g., `clang` or `gcc`.

```
clang program.c
```

- There is a new file `a.out` that can be executed, e.g.,

```
./a.out
```

*Alternatively the program can be run only by `a.out` in the case the actual working directory is set in the search path of executable files*

- The program prints the argument of the function `printf()`.

```
./a.out
```

```
I like B3B36PRG!
```

---

- If you prefer to run the program just by `a.out` instead of `./a.out` you need to add your actual working directory to the search paths defined by the environment variable `PATH`.

```
export PATH="$PATH: `pwd`"
```

*Notice, this is not recommended, because of potentially many working directories.*

- The command `pwd` prints the actual working directory, see `man pwd`.



## Program Building: Compiling and Linking

- The previous example combines three particular steps of the program building in a single call of the command (`clang` or `gcc`).
- The particular steps can be performed individually.
  1. Text preprocessing by the **preprocessor**, which utilizes its own macro language (commands with the prefix `#`).

*All referenced header files are included into a single source file.*

2. Compilation of the source file into the object file.

*Names of the object files usually have the suffix `.o`.*

**`clang -c program.c -o program.o`**

*The command combines preprocessor and compiler.*


3. Executable file is linked from the particular object files and referenced libraries by the linker (linking), e.g.,

**`clang program.o -o program`**



## Compilation and Linking Programs

- Program development is editing of the source code (files with suffixes `.c` and `.h`).  
*Human readable*
- Compilation of the particular source files (`.c`) into object files (`.o` or `.obj`).  
*Machine readable*
- Linking the compiled files into executable binary file.
- Execution and debugging of the application and repeated editing of the source code.

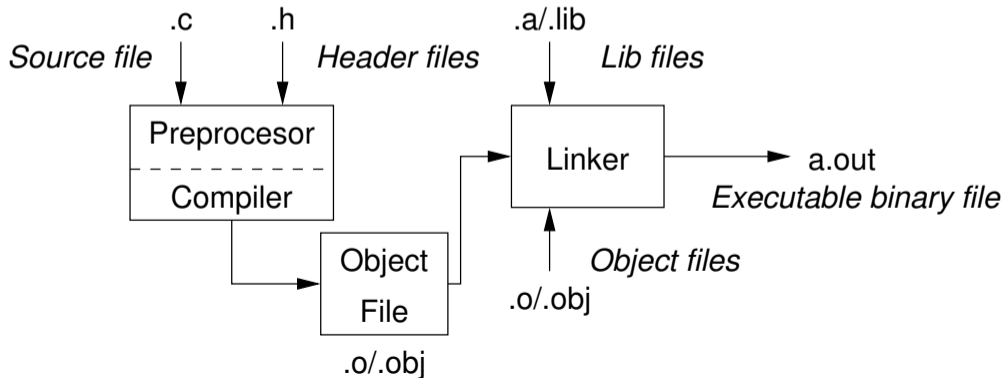



## Steps of Compiling and Linking

- **Preprocessor** – allows to define macros and adjust compilation according to the particular environment.  
*The output is text (“source”) file.*
- **Compiler** – Translates source (text) file into machine readable form.  
*Native (machine) code of the platform, bytecode, or assembler alternatively.*
- **Linker** – links the final application from the object files.  
*Under OS, it can still reference library functions (dynamic libraries linked during the program execution), it can also contain OS calls (libraries).*
- Particular steps **preprocessor**, **compiler**, and **linker** are usually implemented by a “single” program that is called with appropriate arguments.

*E.g., clang or gcc.*



## Compilers of C Program Language

- In PRG, we mostly use compilers from the families of compilers:

- `gcc` – GNU Compiler Collection;

<https://gcc.gnu.org>

- `clang` – C language family frontend for LLVM.

<http://clang.llvm.org>

*Under Win, two derived environments can be utilized: `cygwin` or `MinGW`.*

<https://www.cygwin.com/> or `MinGW` <http://www.mingw.org/>

But, it is straightforward to use WSL(2) – Windows Subsystem for Linux.

- Basic usage (flags and arguments) are identical for both compilers.

*`clang` is compatible with `gcc`*

- Example

- compile: `gcc -c main.c -o main.o`

- link: `gcc main.o -o main`



## Structure of the Source Code – Commented Example

- Commented source file program.c.

```
1  /* Comment is inside the markers (two characters)
2     and it can be split to multiple lines */
3  // In C99 - you can use single line comment
4  #include <stdio.h> /* The #include direct causes to include header file stdio.h from
     the C standard library */
6  int main(void) // simplified declaration
7  {             // of the main function
8     puts("I like B3B36PRG!\n"); /* calling puts() function from the stdio.h library to
     print string to the standard output. \n denotes a new line */
9     return 0; /* termination of the function. Return value 0 to the operating system,
     0 means EXIT_SUCCESS */
10 }
```

- The program is functional; however, it is not exactly correct as `puts()` might fail.

See [man puts](#).

The functions `fputs()` and `puts()` return a nonnegative integer on success and EOF on error.



## Handling Function's Return Values

```
1 #include <stdio.h> // for puts()
2 #include <stdlib.h> // for EXIT_SUCCESS and EXIT_FAILURE
4 int main(void)
5 {
6     int ret = EXIT_SUCCESS;
7     if (puts("I like B3B36PRG!\n") == EOF) {
8         ret = EXIT_FAILURE;
9     }
10    return ret;
11 }
```

- An error when printing to the standard output (`stdout`) can be considered an extreme case.
- Typically, an error does not occur on standard (text) output (`stdout`), yet checking **the return values of functions is essential**, especially when working with files or loading input.
- The program is functional; however, it is not exactly correct as `puts()` might fail.

Nevertheless, for the sake of clarity, in B3B36PRG, we do not require checking the return values when printing to `stdout` using functions like `puts()` or `printf()`. If such as an error occurs, it is unlikely we can somehow manage the error.



## Functions, Modules, and Compiling and Linking

- Function is the fundamental building block of the **modular** programming language.

*Modular program is composed of several modules/source files.*

- **Function definition** consists of the

- **Function header;**
- **Function body.**

*Definition is the function implementation.*

- **Function prototype (declaration)** is the function header to provide information how the function can be called.

*It allows to use the function prior its definition, i.e., it allows to compile the code without the function implementation, which may be located in other place of the source code, or in other module.*

- **Declaration** is the **function header** and it has the form

```
type function_name(arguments);
```



## Functions in C

- Function definition inside other function is not allowed in C.
- Function names can be exported to other modules.

**Module is an independent file (compiled independently).**

- Function are implicitly declared as **extern**, i.e., visible.
- Using the **static** specifier, the visibility of the function can be limited to the particular module. **Local module function.**
- Function arguments are **local variables** initialized by the values passed to the function.  
*Arguments are passed by value (call by value).*
- **C allows recursions** – local variables are **auto**matically allocated at the stack.  
*Further details about storage classes in next lectures.*
- Arguments of the function are not mandatory – void arguments.

**fnc(void)**

- The return type of the function can be **void**, i.e., a function without return value –  
**void fnc(void);**



## Program Example / Module

```
1 #include <stdio.h> /* header file */
2 #define NUMBER 5 /* symbolic constant */
4 int compute(int a); /* function header/prototype */
6 int main(int argc, char *argv[])
7 { /* main function */
8     int v = 10; /* variable definition - assignment of the memory to the variable
9         name; it is also declaration that allows using the variable name from this line
10        */
11     int r; /* variable definition (and declaration) */
12     r = compute(v); /* function call */
13     return 0; /* termination of the main function */
14 }
15 int compute(int a)
16 { /* definition of the function */
17     int b = 10 + a; /* function body */
18     return b; /* function return value */
19 }
```



## Program Starting Point – main()

- Each executable program must contain a single definition of the function and that function must be the `main()`.
- The `main()` function is the starting point of the program with two basic forms.
  1. Full variant for programs running under an Operating System (OS).

```
1 int main(int argc, char *argv[])
2 {
3     ...
4 }
```

2. For embedded systems without OS

```
1 int main(void)
2 {
3     ...
4 }
```





## Arguments of the `main()` Function

- During the program execution, the OS passes to the program the number of arguments (`argc`) and the arguments (`argv`).

*In the case we are using OS.*

- The first argument is the name of the program.

```
1 int main(int argc, char *argv[])
2 {
3     int v;
4     v = 10;
5     v = v + 1;
6     return argc;
7 }
```

lec01/var.c

- The program is terminated by the `return` in the `main()` function.
- The returned value is passed back to the OS and it can be further use, e.g., to control the program execution.



## Example of Compilation and Program Execution

- Building the program by the `clang` compiler – it automatically joins the compilation and linking of the program to the file `a.out`.

```
clang var.c
```

- The output file can be specified, e.g., program file `var`.

```
clang var.c -o var
```

- Then, the program can be executed as follows.

```
./var
```

- The compilation and execution can be joined to a single command.

```
clang var.c -o var; ./var
```

- The execution can be conditioned to successful compilation.

```
clang var.c -o var && ./var
```

*Programs return value — 0 means OK.*

*Logical operator && depends on the command interpret, e.g., `sh`, `bash`, `zsh`.*



## Example – Program Execution under Shell

- The return value of the program is stored in the variable `$?`.
- Example of the program execution with different number of arguments.

*sh, bash, zsh*

```
./var
./var; echo $?
1
./var 1 2 3; echo $?
4
./var a; echo $?
2
```



# Outline

- Program in C
- Values and Variables
- Standard Input/Output



## Writing Values of the Numeric Data Types – Literals

- Values of the data types are called **literals**
- C has 6 type of constants (literals)
  - Integer
  - Rational
  - Characters
  - Text strings
  - Enumerated
- Symbolic – `#define NUMBER 10`

*We cannot simply write irrational numbers.*

*Enum*

*Preprocessor*



## Integer Literals

- Integer values are stored as one of the integer type (keywords): `int`, `long`, `short`, `char` and their `signed` and `unsigned` variants.

*Further integer data types are possible.*

- Integer values (literals)

■ Decimal	123 450932	
■ Hexadecimal	0x12 0xFAFF	(starts with <code>0x</code> or <code>0X</code> )
■ Octal	0123 0567	(starts with <code>0</code> )
■ <code>unsigned</code>	12345U	(suffix <code>U</code> or <code>u</code> )
■ <code>long</code>	12345L	(suffix <code>L</code> or <code>l</code> )
■ <code>unsigned long</code>	12345ul	(suffix <code>UL</code> or <code>ul</code> )
■ <code>long long</code>	12345LL	(suffix <code>LL</code> or <code>ll</code> )

- Without suffix, the literal is of the type `int`.



## Literals of Rational Numbers

- Rational numbers can be written
  - with floating point – `13.1`;
  - or with mantissa and exponent – `31.4e-3` or `31.4E-3`.

*Scientific notation*

- Floating point numeric types depends on the implementation, but they usually follow IEEE-754-1985.

`float`, `double`

- Data types of the rational literals:
  - `double` – by default, if not explicitly specified to be another type;
  - `float` – suffix `F` or `f`;
  - `long double` – suffix `L` or `l`.

```
float f = 10.f;
```

```
long double ld = 10.1l;
```



## Character Literals

- Format – single (or multiple) character in apostrophe.

`'A'`, `'B'` or `'\n'`

- Value of the single character literal is the code of the character.

`'0'` ~ 48, `'A'` ~ 65

*Value of character out of ASCII (greater than 127) depends on the compiler.*

- Type of the character constant (literal).
  - **Character constant is the `int` type.**





## String Literals

- Format – a sequence of character and control characters (escape sequences) enclosed in quotation (citation) marks.

"This is a string constant with the end of line character `\n`".

- String constants separated by white spaces are joined to single constant, e.g.,

"String literal" "with the end of the line character `\n`"

is concatenate into

"String literal with end of the line character `\n`"

- Type

- String literal is stored in the array of the type `char` terminated by the `null` character `'\0'`.

E.g., String literal `"word"` is stored as

'w'	'o'	'r'	'd'	'\0'
-----	-----	-----	-----	------

*The size of the array must be about 1 item longer to store `\0`!*

*More about text strings in the following lectures and labs.*



## Constants of the Enumerated Type

- The default values of the enumeration type constants start from 0 and the values can be explicitly prescribed.
- Without specifying a value, the next element has a value one higher than the previous one.
- Enumeration type constants can have the same values.

```
1 enum {
2     SPADES,
3     CLUBS,
4     HEARTS,
5     DIAMONDS
6 };
```

```
1 enum {
2     SPADES = 10,
3     CLUBS, // the value is 11
4     HEARTS = 15,
5     DIAMONDS = 13
6 };
```

```
1 enum {
2     NUMBER_1 = 1,
3     NUMBER_2 = 2,
4     NUMBER_3 = 1,
5     NUMBER_4, // the value is 2
6 };
```

*The enumeration values are usually written in uppercase.*

- Type – enumerated constant is the `int` type.
  - Value of the enumerated literal can be used in loops.

```
1 enum { SPADES = 0, CLUBS, HEARTS, DIAMONDS, NUM_COLORS };
3 for (int i = SPADES; i < NUM_COLORS; ++i) {
4     ...
5 }
```

lec01/enum.c



## Symbolic Constant – #define

- Format – the constant is established by the preprocessor command `#define`.
  - It is macro command without argument.
  - Each `#define` must be on a new line.

```
#define SCORE 1
```

*Usually written in uppercase.*

- Symbolic constants can express constant expressions.

```
#define MAX_1 ((10*6) - 3)
```

- Symbolic constants can be nested.

```
#define MAX_2 (MAX_1 + 1)
```

- **Preprocessor performs the text replacement of the define constant by its value.**

```
#define MAX_2 (MAX_1 + 1)
```

*It is highly recommended to use brackets to ensure correct evaluation of the expression, e.g., the symbolic constant `5*MAX_1` with the outer brackets is  $5*((10*6) - 3)=285$  vs  $5*(10*6) - 3=297$ .*



## Variable with a constant value modifier (keyword) (`const`)

- Using the keyword `const`, a variable can be marked as constant.

*Compiler checks assignment and do not allow to set a new value to the variable.*

- A constant value can be defined as follows.

```
const float pi = 3.14159265;
```

- In contrast to the symbolic constant.

```
#define PI 3.14159265
```

- Constant values have type, and thus it supports **type checking**.



## Example: Sum of Two Values

```
1  #include <stdio.h>
3  int main(void)
4  {
5      int sum; // definition of local variable of the int type
7      sum = 100 + 43; /* set value of the expression to sum */
8      printf("The sum of 100 and 43 is %i\n", sum);
9      /* %i formatting command to print integer number */
10     return 0;
11 }
```

- The variable `sum` of the type `int` represents an integer number. Its value is stored in the memory.
- `sum` is selected symbolic name of the memory location, where the integer value (type `int`) is stored.



## Example of Sum of Two Variables

```
1  #include <stdio.h>
3  int main(void)
4  {
5      int var1;
6      int var2 = 10; /* inicialization of the variable */
7      int sum;
9      var1 = 13;
11     sum = var1 + var2;
13     printf("The sum of %i and %i is %i\n", var1, var2, sum);
15     return 0;
16 }
```

- Variables `var1`, `var2` and `sum` represent three different locations in the memory (allocated automatically), where three integer values are stored.



# Variable Definition

- The variable definition has a general form  
**declaration-specifiers variable-identifier;**
- Declaration specifiers are following.
  - **Storage classes:** at most one of the `auto`, `static`, `extern`, `register`;
  - **Type quantifiers:** `const`, `volatile`, `restrict`;  
*None or more type quantifiers are allowed.*
  - **Type specifiers:** `void`, `char`, `short`, `int`, `long`, `float`, `double`, `signed`, `unsigned`.  
In addition, `struct` and `union` type specifiers can be used. Finally, own types defined by `typedef` can be used as well.

*Detailed description in further lectures.*




# Assignment, Variables, and Memory – Visualization

## unsigned char

```
1 unsigned char var1;  
2 unsigned char var2;  
3 unsigned char sum;  
  
5 var1 = 13;  
6 var2 = 10;  
8 sum = var1 + var2;
```

- Each variable allocate 1 byte
- Content of the memory is not defined after allocation
- Name of the variable “references” to the particular memory location
- Value of the variable is the content of the memory location






# Assignment, Variables, and Memory – Visualization

## unsigned char

```
1 unsigned char var1;  
2 unsigned char var2;  
3 unsigned char sum;  
  
5 var1 = 13;  
6 var2 = 10;  
8 sum = var1 + var2;
```

- Each variable allocate 1 byte
- Content of the memory is not defined after allocation
- Name of the variable “references” to the particular memory location
- Value of the variable is the content of the memory location




# Assignment, Variables, and Memory – Visualization

## unsigned char

```
1 unsigned char var1;  
2 unsigned char var2;  
3 unsigned char sum;  
  
5 var1 = 13;  
6 var2 = 10;  
8 sum = var1 + var2;
```

- Each variable allocate 1 byte
- Content of the memory is not defined after allocation
- Name of the variable “references” to the particular memory location
- Value of the variable is the content of the memory location




# Assignment, Variables, and Memory – Visualization

## unsigned char

```
1 unsigned char var1;  
2 unsigned char var2;  
3 unsigned char sum;  
5 var1 = 13;  
6 var2 = 10;  
8 sum = var1 + var2;
```

- Each variable allocate 1 byte
- Content of the memory is not defined after allocation
- Name of the variable “references” to the particular memory location
- Value of the variable is the content of the memory location




# Assignment, Variables, and Memory – Visualization

## unsigned char

```
1 unsigned char var1;  
2 unsigned char var2;  
3 unsigned char sum;  
5 var1 = 13;  
6 var2 = 10;  
8 sum = var1 + var2;
```

- Each variable allocate 1 byte
- Content of the memory is not defined after allocation
- Name of the variable “references” to the particular memory location
- Value of the variable is the content of the memory location




# Assignment, Variables, and Memory – Visualization

## unsigned char

```
1 unsigned char var1;  
2 unsigned char var2;  
3 unsigned char sum;  
  
5 var1 = 13;  
6 var2 = 10;  
8 sum = var1 + var2;
```

- Each variable allocate 1 byte
- Content of the memory is not defined after allocation
- Name of the variable “references” to the particular memory location
- Value of the variable is the content of the memory location




# Assignment, Variables, and Memory – Visualization

## unsigned char

```
1 unsigned char var1;  
2 unsigned char var2;  
3 unsigned char sum;  
  
5 var1 = 13;  
6 var2 = 10;  
8 sum = var1 + var2;
```

- Each variable allocate 1 byte
- Content of the memory is not defined after allocation
- Name of the variable “references” to the particular memory location
- Value of the variable is the content of the memory location




# Assignment, Variables, and Memory – Visualization

## unsigned char

```
1 unsigned char var1;  
2 unsigned char var2;  
3 unsigned char sum;  
  
5 var1 = 13;  
6 var2 = 10;  
8 sum = var1 + var2;
```

- Each variable allocate 1 byte
- Content of the memory is not defined after allocation
- Name of the variable “references” to the particular memory location
- Value of the variable is the content of the memory location



## Assignment, Variables, and Memory – Visualization `int`

```


1  int var1;
2  int var2;
3  int sum;
5  // 00 00 00 13
6  var1 = 13;
8  // x00 x00 x01 xF4
9  var2 = 500;
11 sum = var1 + var2;

```

- Variables of the `int` types allocate 4 bytes.

*Size can be find out by the operator `sizeof(int)`.*

- Memory content is not defined after the definition of the variable to the memory.

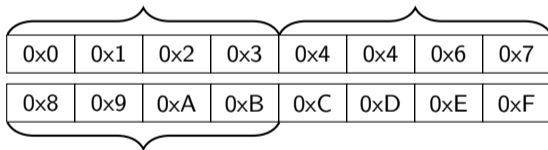

500 (dec) is 0x01F4 (hex)

513 (dec) is 0x0201 (hex)

*For Intel x86 and x86-64 architectures, the values (of multi-byte types) are stored in the **little-endian** order.*





## Assignment, Variables, and Memory – Visualization `int`

```


1  int var1;
2  int var2;
3  int sum;
5  // 00 00 00 13
6  var1 = 13;
8  // x00 x00 x01 xF4
9  var2 = 500;
11 sum = var1 + var2;

```

- Variables of the `int` types allocate 4 bytes.

*Size can be find out by the operator `sizeof(int)`.*

- Memory content is not defined after the definition of the variable to the memory.

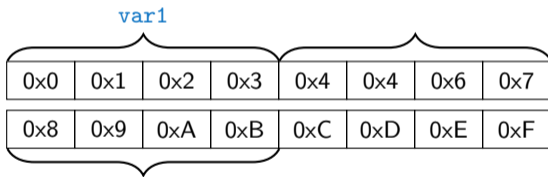

500 (dec) is 0x01F4 (hex)

513 (dec) is 0x0201 (hex)

*For Intel x86 and x86-64 architectures, the values (of multi-byte types) are stored in the **little-endian** order.*



## Assignment, Variables, and Memory – Visualization `int`

```


1  int var1;
2  int var2;
3  int sum;
5  // 00 00 00 13
6  var1 = 13;
8  // x00 x00 x01 xF4
9  var2 = 500;
11 sum = var1 + var2;

```

- Variables of the `int` types allocate 4 bytes.

*Size can be find out by the operator `sizeof(int)`.*

- Memory content is not defined after the definition of the variable to the memory.

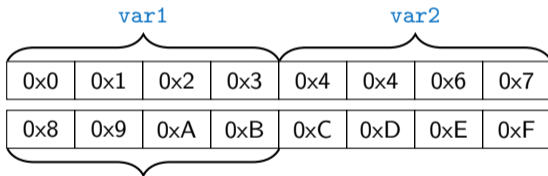

500 (dec) is 0x01F4 (hex)

513 (dec) is 0x0201 (hex)

*For Intel x86 and x86-64 architectures, the values (of multi-byte types) are stored in the **little-endian** order.*



## Assignment, Variables, and Memory – Visualization `int`

```


1  int var1;
2  int var2;
3  int sum;
5  // 00 00 00 13
6  var1 = 13;
8  // x00 x00 x01 xF4
9  var2 = 500;
11 sum = var1 + var2;

```

- Variables of the `int` types allocate 4 bytes.

*Size can be find out by the operator `sizeof(int)`.*

- Memory content is not defined after the definition of the variable to the memory.

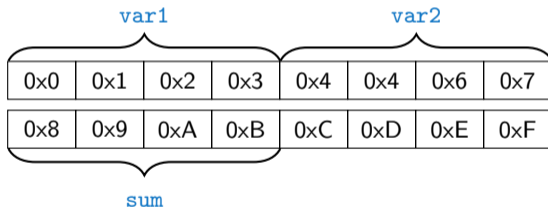

500 (dec) is 0x01F4 (hex)

513 (dec) is 0x0201 (hex)

*For Intel x86 and x86-64 architectures, the values (of multi-byte types) are stored in the **little-endian** order.*



## Assignment, Variables, and Memory – Visualization `int`

```


1  int var1;
2  int var2;
3  int sum;
5  // 00 00 00 13
6  var1 = 13;
8  // x00 x00 x01 xF4
9  var2 = 500;
11 sum = var1 + var2;

```

- Variables of the `int` types allocate 4 bytes.

*Size can be find out by the operator `sizeof(int)`.*

- Memory content is not defined after the definition of the variable to the memory.

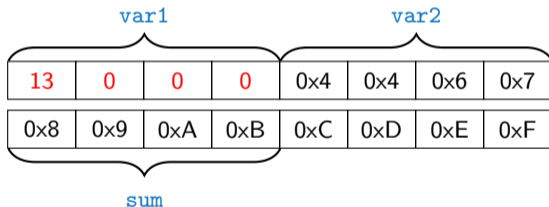

500 (dec) is 0x01F4 (hex)

513 (dec) is 0x0201 (hex)

*For Intel x86 and x86-64 architectures, the values (of multi-byte types) are stored in the **little-endian** order.*



## Assignment, Variables, and Memory – Visualization `int`

```


1  int var1;
2  int var2;
3  int sum;
5  // 00 00 00 13
6  var1 = 13;
8  // x00 x00 x01 xF4
9  var2 = 500;
11 sum = var1 + var2;

```

- Variables of the `int` types allocate 4 bytes.

*Size can be find out by the operator `sizeof(int)`.*

- Memory content is not defined after the definition of the variable to the memory.

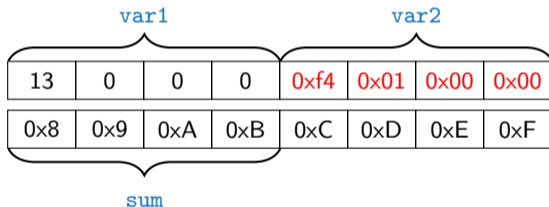

500 (dec) is 0x01F4 (hex)

513 (dec) is 0x0201 (hex)

*For Intel x86 and x86-64 architectures, the values (of multi-byte types) are stored in the **little-endian** order.*



# Assignment, Variables, and Memory – Visualization `int`

```


1  int var1;
2  int var2;
3  int sum;
5  // 00 00 00 13
6  var1 = 13;
8  // x00 x00 x01 xF4
9  var2 = 500;
11 sum = var1 + var2;

```

- Variables of the `int` types allocate 4 bytes.

*Size can be find out by the operator `sizeof(int)`.*

- Memory content is not defined after the definition of the variable to the memory.

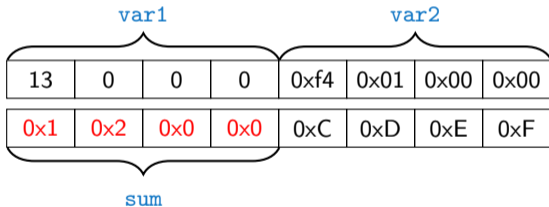

500 (dec) is 0x01F4 (hex)

513 (dec) is 0x0201 (hex)

*For Intel x86 and x86-64 architectures, the values (of multi-byte types) are stored in the **little-endian** order.*



# Outline

- Program in C
- Values and Variables
- **Standard Input/Output**



## Standard Input and Output

- An executed program within Operating System (OS) environments has assigned (usually text-oriented) standard input (`stdin`) and output (`stdout`).

*Programs for MCU without OS does not have them.*

- The `stdin` and `stdout` streams can be utilized for communication with a user.
- Basic function for text-based input is `getchar()` and for the output `putchar()`.

*Both are defined in the standard C library `<stdio.h>`.*

- For parsing numeric values the `scanf()` function can be utilized.
- The function `printf()` provides formatted output, e.g., a number of decimal places.

*They are library functions, not keywords of the C language.*





## Formatted Output – printf()

- Numeric values can be printed to the standard output using `printf()`.

`man printf` or `man 3 printf`

- The first argument is the format string that defines how the values are printed.
- The conversion specification starts with the character `'%'`.
- Text string not starting with `%` is printed as it is.
- Basic format strings to print values of particular types are as follows.

<code>char</code>	<code>%c</code>
<code>_Bool</code>	<code>%i, %u</code>
<code>int</code>	<code>%i, %x, %o</code>
<code>float</code>	<code>%f, %e, %g, %a</code>
<code>double</code>	<code>%f, %e, %g, %a</code>

- Specification of the number of digits is possible, as well as an alignment to left (right), etc.

*Further options in homeworks and lab exercises.*



## Formatted Input – scanf()

- Numeric values can be read (from stdin) by the `scanf()` function. man scanf or man 3 scanf
- The argument of the function is a format string. Syntax is similar to printf().
- A memory address of the variable has to be provided to set its value from the `stdin`.
- The return value of the `scanf()` call is the number of successfully parsed values.
- Example of readings integer value and value of the `double` type.

```
1 #include <stdio.h> // printf and scanf
2 #include <stdlib.h> // EXIT_FAILURE and EXIT_SUCCESS
4 int main(void)
5 {
6     int ret = EXIT_FAILURE;
7     int i;
8     double d;
10    printf("Enter int value: ");
11    int r = scanf("%i", &i); // operator & returns the address of i
12    if (r == 1)
13        printf("Enter a double value: ");
14    if (r == 1 && scanf("%lf", &d) == 1) { // !!! Return value !!!
15        printf("You entered %02i and %0.1f\n", i, d);
16        ret = EXIT_SUCCESS; // zero - exit success
17    }
18    return ret; // indicate failure or success
19 }
```

lec01/scanf.c



## Example: Program with Output to the stdout 1/2

- Instead of `printf()` we can use `fprintf()` with explicit output stream `stdout`, or alternatively `stderr`; both functions from the `<stdio.h>`.

```
1 #include <stdio.h>
3 int main(int argc, char **argv) {
4     int r = fprintf(stdout, "My first program in C!\n");
5     fprintf(stdout, "printf() returns %d that is a number of printed characters\n", r);
6     r = fprintf(stdout, "123\n");
7     fprintf(stdout, "printf(\"123\\n\") returns %d because of end-of-line '\\n'\n", r);
8     fprintf(stdout, "Its name is \"%s\"\n", argv[0]);
9     fprintf(stdout, "Run with %d arguments\n", argc);
10    if (argc > 1) {
11        fprintf(stdout, "The arguments are:\n");
12        for (int i = 1; i < argc; ++i) {
13            fprintf(stdout, "Arg: %d is \"%s\"\n", i, argv[i]);
14        }
15    }
16    return 0;
17 }
```

lec01/pring\_args.c



## Example: Program with Output to the stdout 2/2

- Notice, using the header file `<stdio.h>`, several other files are included as well to define types and functions for input and output. *Check by, e.g., `clang -E print_args.c`*

```
./print_args first second
My first program in C!
printf() returns 23 that is a number of printed characters
123
printf("123\n") returns 4 because of end-of-line '\n'
Its name is "./print_args"
Run with 3 arguments
The arguments are:
Arg: 1 is "first"
Arg: 2 is "second"
```



## Programming - Loops - Example Printed Text Message

- For example, a message can be printed 4× by repeating the print command.

```
1  #include <stdio.h>
3  int main(void)
4  {
5      printf("I like B3B36PRG!\n");
6      printf("I like B3B36PRG!\n");
7      printf("I like B3B36PRG!\n");
8      printf("I like B3B36PRG!\n");
9      return 0;
10 }
```

```
1  #include <stdio.h>
3  int main(void)
4  {
5      const int N = 4;
6      for (int i = 0; i < N; ++i) {
7          printf("I like B3B36PRG!\n");
8      }
9      return 0;
10 }
```

- Using a loop and a control variable is the **programming approach**.
- We can generalize the example by having the user specify the number of repetitions from the standard input.



## Programming - Loops – Example 1/3

```
1 #include <stdio.h>
2 #include <stdlib.h> // for EXIT_SUCCESS and EXIT_FAILURE
4 int main(void)
5 {
6     int ret = EXIT_SUCCESS;
7     int n; // variable is not initialize
8     printf("Enter a positive integer number from 1 to 9: ");
9     int r = scanf("%d", &n); // test scan has been successful in reading integer value
10    if (r == 1 && n > 0 && n < 10) {
11        int i = 0;
12        while (i < n) {
13            puts("I like B3B36PRG!");
14            i = i + 1;
15        }
16    } else {
17        printf("ERROR: Input value must be in the range (0,10)\n");
18        ret = EXIT_FAILURE;
19    }
20    return ret;
21 }
```

lec01/print.c



- Naive, functional solution, in principle sufficient, but we can decompose such a program.

## Programming - Loops – Example 2/3

```
1 #include <stdio.h>
2 #include <stdlib.h> // for EXIT_SUCCESS and EXIT_FAILURE
4 void print(int n);
6 int main(void)
7 {
8     int ret = EXIT_SUCCESS;
9     int n;
10    printf("Enter a positive integer number from 1 to 9: ");
11    int r = scanf("%d", &n); // passing address of the n variable
12    if (r == 1 && n > 0 && n < 10) {
13        print(n);
14    } else {
15        fprintf("ERROR: Input value must be in the range (0,10)\n");
16        ret = EXIT_FAILURE;
17    }
18    return ret;
19 }
```

lec01/print2.c

- Print in a separate function `print()`.
- Better, but still relatively complex – we can separate the loading, but also generalize the values and avoid „magic numbers“ in the function definition.



## Programming - Loops – Example 3/3

```

1  #include <stdio.h>
2  #include <stdlib.h>
4  int read(int min, int max, int *n);
5  void print(int n);
7  #define MIN 1
8  #define MAX 9
10 int main(void)
11 {
12     int ret = EXIT_SUCCESS;
13     int n;
14     if (read(MIN, MAX, &n)) {
15         print(n);
16     } else {
17         ret = EXIT_FAILURE;
18     }
19     ret && printf("ERROR: Input value must
        be in the range (%d,%d)\n", MIN - 1,
        MAX + 1);
20     return ret;
21 }
23 int read(int min, int max, int *n)
24 {
25     printf("Enter a positive integer number
        from %d to %d: ", min, max);
26     return scanf("%d", n) == 1 && *n >= min &&
        *n <= max; // logical true is a value !=
        0, shortcut evaluation
27 }
29 void print(int n)
30 {
31     int i = 0;
32     while (i < n) {
33         puts("I like B3B36PRG!");
34         i = i + 1;
35     }
36 }

```

lec01/print3.c

- We pass the `read()` function a pointer to a valid memory address, it is done programmatically.
- The program returns a return value and warns the user on incorrect input.
- We can further extend the values of **MIN** and **MAX** to be defined at compile time (`#ifndef`).

*We can also use `fprintf(stderr,)`.*





# Summary of the Lecture



# Topics Discussed

- Information about the Course
- Introduction to C Programming
  - Program, source codes and compilation of the program
  - Structure of the source code and writing program
  - Variables and basic types
  - Variables, assignment, and memory
  - Basic Expressions
  - Standard input and output of the program
  - Formatting input and output
  
- Next: Expressions and Bitwise Operations, Selection Statements and Loops



# Topics Discussed

- Information about the Course
- Introduction to C Programming
  - Program, source codes and compilation of the program
  - Structure of the source code and writing program
  - Variables and basic types
  - Variables, assignment, and memory
  - Basic Expressions
  - Standard input and output of the program
  - Formatting input and output
  
- Next: Expressions and Bitwise Operations, Selection Statements and Loops



# Part IV

## Appendix



# Example of Step Debugging

```

08 // - function -----
09 Bool dijkstra_solve(void *dijkstra, int label)
10 {
11     dijkstra_t *dj = (dijkstra_t*)dijkstra;
12     if (!dj || label < 0 || label >= dj->num_nodes) {
13         return false;
14     }
15     dj->start_node = label;
16
17     void *pq = pq_alloc(dj->num_nodes);
18
19     dj->nodes[label].cost = 0; // initialize the starting node
20     pq_push(pq, label, 0);
21
22     int cur_label;
23     while (! !pq_is_empty(pq) && pq_pop(pq, &cur_label) ) {
24         node_t *cur = &dj->nodes[cur_label];
25         for (int i = 0; i < cur->edge_count; ++i) // relax all children
26             edge_t *edge = &dj->edges[cur->edge_start + i]; // avoid copying
27             node_t *to = &dj->nodes[edge->to];
28             const int cost = cur->cost + edge->cost;
29     }
30 }

```

LOCALS

```

edges: 0x55555555c3a0
  from: 0
  to: 39
  cost: 411
  > to: 0x55555555a2c8
  cost: 21845
  l: 0
  cur: 0x55555555bc10
  edge_start: 0
  edge_count: 4
  parent: -1

```

WATCH

```

g->num_edges: var-create: unable to create va
g->num_edges > 0: var-create: unable to creat

```

CALL STACK

```

dijkstra_solve(void * dijkstra, int label) :
main(int argc, char ** argv) tgraph_search.c

```

TERMINAL

```

Load graph from g
Find all shortest paths from the node 0

```

<https://youtu.be/-QXu3Wk-WxQ> (~ 25 min)

Debugging in Visual Studio Code <https://cw.fel.cvut.cz/wiki/courses/b3b36prg/resources/coding>

Or a two-part tutorial motivated by BAB36PRGA: <https://youtu.be/uAszrJoY1NU> (~11 minutes) and

<https://youtu.be/g290dyMTAdQ> (~15 minutes).



# Outline

- Programs



# Computer Calculation

- Understanding of the calculation on a processor simulator such as Little Man Computer.

<https://peterhigginson.co.uk/LMC/>, <https://gcsecomputing.org.uk/lmc/>

<http://www.vivaxsolutions.com/web/lmc.aspx>, <https://www.youtube.com/watch?v=6cbJWV4AGmk>

- LDA** – Load to the acc.
- STA** – Store the acc. to address
- ADD** – Add to the acc.
- INP** – Input to the acc.
- OUT** – Output of the acc.
- BRP** – Set PC on zero or positive acc.
- HLT** – Stop executing program

**Assembly Language Code**

```

00 INP 9 01
01 STA 99
02 INP 9 01
03 ADD 99
04 OUT 9 02
05 HLT 0 00

// Output the sum of two
// numbers

```

**CPU**

PROGRAM COUNTER: 06

INSTRUCTION REGISTER: 0

ADDRESS REGISTER: 00

ACCUMULATOR: 003

ARITH-METIC UNIT

**RAM**

0	1	2	3	4	5	6	7	8	9
901	399	901	199	902	000	000	000	000	000
10	11	12	13	14	15	16	17	18	19
000	000	000	000	000	000	000	000	000	000
20	21	22	23	24	25	26	27	28	29
000	000	000	000	000	000	000	000	000	000
30	31	32	33	34	35	36	37	38	39
000	000	000	000	000	000	000	000	000	000
40	41	42	43	44	45	46	47	48	49
000	000	000	000	000	000	000	000	000	000
50	51	52	53	54	55	56	57	58	59
000	000	000	000	000	000	000	000	000	000
60	61	62	63	64	65	66	67	68	69
000	000	000	000	000	000	000	000	000	000
70	71	72	73	74	75	76	77	78	79
000	000	000	000	000	000	000	000	000	000
80	81	82	83	84	85	86	87	88	89
000	000	000	000	000	000	000	000	000	000
90	91	92	93	94	95	96	97	98	99
000	000	000	000	000	000	000	000	000	001

**INPUT**: 2

**OUTPUT**: 3

Program HALTED, RESET, LOAD, SELECT or alter

default fast | ©GCSEcomputing.org.uk and Peter Higginson



## Example – Processing the Source Code by Preprocessor

- Using the `-E` flag, we can perform only the preprocessor step.

```
gcc -E var.c
```

*Alternatively* `clang -E var.c`

```
1 # 1 "var.c"
2 # 1 "<built-in>"
3 # 1 "<command-line>"
4 # 1 "var.c"
5 int main(int argc, char **argv) {
6     int v;
7     v = 10;
8     v = v + 1;
9     return argc;
10 }
```

lec01/var.c





## Example – Compilation of the Source Code to Assembler

- Using the `-S` flag, the source code can be compiled to Assembler.

```
clang -S var.c -o var.s
```

```

1  .file "var.c"
2  .text
3  .globl main
4  .align 16, 0x90
5  .type main,@function
6  main:                                #
    @main
7  .cfi_startproc
8  # BB#0:
9  pushq %rbp
10 .Ltmp2:
11  .cfi_def_cfa_offset 16
12 .Ltmp3:
13  .cfi_offset %rbp, -16
14  movq %rsp, %rbp
15 .Ltmp4:
16  .cfi_def_cfa_register %rbp
17  movl $0, -4(%rbp)
18  movl %edi, -8(%rbp)
19  movq %rsi, -16(%rbp)
20  movl $10, -20(%rbp)
21  movl -20(%rbp), %edi
22  addl $1, %edi
23  movl %edi, -20(%rbp)
24  movl -8(%rbp), %eax
25  popq %rbp
26  ret
27 .Ltmp5:
28  .size main, .Ltmp5-main
29  .cfi_endproc
32  .ident "FreeBSD clang version 3.4.1 (tags
    /RELEASE_34/dot1-final 208032) 20140512"
33  .section ".note.GNU-stack","",@progbits

```



## Example – Compilation to Object File

- The source file is compiled to the object file.

```
clang -c var.c -o var.o
```

```
% clang -c var.c -o var.o
```

```
% file var.o
```

```
var.o: ELF 64-bit LSB relocatable, x86-64, version 1 (FreeBSD), not stripped
```

- **Linking** the object file(s) provides the executable file.

```
clang var.o -o var
```

```
% clang var.o -o var
```

```
% file var
```

```
var: ELF 64-bit LSB executable, x86-64, version 1 (FreeBSD), dynamically linked (uses shared  
libs), for FreeBSD 10.1 (1001504), not stripped
```

*dynamically linked  
not stripped*



## Example – Executable File under OS 1/2

- By default, executable files are “tied” to the C library and OS services.
- The dependencies can be shown by `ldd var`.

```
ldd var
var:
    libc.so.7 => /lib/libc.so.7 (0x2c41d000)
```

*ldd – list dynamic object dependencies*

- The so-called static linking can be enabled by the `-static`.

```
clang -static var.o -o var
% ldd var
% file var
var: ELF 64-bit LSB executable, x86-64, version 1 (FreeBSD), statically linked, for FreeBSD
    10.1 (1001504), not stripped
% ldd var
ldd: var: not a dynamic ELF executable
```

*Check the size of the created binary files!*



## Example – Executable File under OS 2/2

- The compiled program (object file) contains symbolic names (by default).

*E.g., usable for debugging.*

```
clang var.c -o var
wc -c var
    7240 var
```

*wc – word, line, character, and byte count*

*-c – byte count*

- Symbols can be removed by the tool (program) **strip**.

```
strip var
wc -c var
    4888 var
```

*Alternatively, you can show size of the file by the command `ls -l`.*



## Extended Variants of the `main()` Function

- Extended declaration of the `main()` function provides access to the environment variables.

*For Unix and MS Windows like OS.*

```
1 int main(int argc, char **argv, char **envp) { ... }
```

*The environment variables can be accessed using the function `getenv()` from the standard library `<stdlib.h>`.*

`lec01/main_env.c`

- For Mac OS X, there are further arguments.

```
1 int main(int argc, char **argv, char **envp, char **apple)  
2 {  
3     ...  
4 }
```

