

Resource Ownership in C++

Jan Faigl

Department of Computer Science
Faculty of Electrical Engineering
Czech Technical University in Prague

Lecture 13

B3B36PRG – Programming in C

Overview of the Lecture

- Part 1 – RAII Principle (in C++)
 - Acquisition-Release Pattern in C/C++
 - RAII – Resource Acquisition is Initialization
 - RAII Threading
 - Smart Pointers
- Part 2 – Move and Copy Semantics (in C++)
 - Assignment of Objects Holding Resources
 - lvalues & rvalues
 - Move and Copy Semantics

Part I

Part 1 – RAII Principle (in C++)

Acquisition-Release Pattern in C

```
int main(void)
{
    int *array = malloc(SIZE * sizeof(int)); /* ACQUISITION */

    /* do work */

    free(array); /* RELEASE */
    return 0;
}
```

Acquisition-Release Pattern in C

```
int main(void)
{
    FILE *in_file = fopen(FILE_NAME, "r"); /* ACQUISITION */

    /* do work */

    fclose(in_file); /* RELEASE */
    return 0;
}
```

Acquisition-Release Pattern in C

```
int main(void)
{
    pthread_create(&thread, NULL, foo, NULL); /* ACQUISITION */

    /* do work */

    pthread_join(&thread, NULL); /* RELEASE */
    return 0;
}
```

Acquisition-Release Pattern in C

```
int main(void)
{
    pthread_mutex_init(&mtx, NULL);
    pthread_mutex_lock(&mtx); /* ACQUISITION */

    /* do work in critical section */

    pthread_mutex_unlock(&mtx); /* RELEASE */
    return 0;
}
```

Acquisition-Release Pattern in C++

```
int main(void)
{
    MyClass* c = new MyClass(); /* ACQUISITION */
    int* array = new int[SIZE];

    /* do work */

    delete[] array;
    delete c; /* RELEASE */
    return 0;
}
```

But what if something goes wrong?

```
int main(void)
{
    int *array = malloc(SIZE * sizeof(int)); /* ACQUISITION */

    if(!everything_ok) {
        return 100; /* !!! Resource is not released */
    }

    free(array); /* RELEASE */
    return 0;
}
```

Automatic Destructor Call

- Destructor is called at the end of life-time!

```
int main(void)
{
    MyClass c; /* Constructor MyClass() is called */

    if(not everything_ok) {
        return 100;
        // ~MyClass() /* EVEN HERE! */
    }

    return 0;
    // ~MyClass() /* Desctructor is called at the end of scope. */
}
```

Automatic Destructor Call

- Destructor is called at the end of life-time!

```
int main(void)
{
    MyClass c; /* Constructor MyClass() is called */

    /* do work */

    return 0;
    // ~MyClass() /* Desctructor is called at the end of scope. */
}
```

Resources Acquisition is Initialization

- Implement *resource acquisition* in a constructor(*initialization*).
- Failure to release resource is handled by throwing an exception.
- Resource release is handled by the destructor.
- Resource is bound to lifetime object instance.

Example Array Implementation

```

struct MallocException : std::exception {
    const char* what() const noexcept { return "Malloc error"; }
};

class MyArray {
    ulong size_p;
    int* data_p;
public:
    MyArray(ulong size);
    ~MyArray();

    int& operator[](ulong index);
    uint size() const;
};

```

lec13/myarray.cpp

14 / 48

Implementation of RAII in Standard Library

- Dynamic array – `std::vector`
- File – `std::ifstream` / `std::ofstream`
- Mutex – `std::lock_guard`
- Thread – `std::jthread`
- Pointer to heap – `std::unique_ptr` / `std::shared_ptr`

Example Array Implementation

```

MyArray::MyArray(ulong size) : size_p(size) {
    data_p = (int*)calloc(size, sizeof(int));
    if(data_p == nullptr) {
        throw MallocException();
    }
}

MyArray::~MyArray() {
    free(data_p);
}

```

B3B36PRG – Lecture 13: Ownership in C++

15 / 48

`std::vector`

- Generic wrapper for dynamic array.
- More general version of `MyArray`.
- Other useful features:
 - such as `push_back()` with dynamic reallocation of the underlying array.

```

int main()
{
    std::vector<int> v = { 7, 5, 16, 8 };

    v.push_back(25);
    v.push_back(13);

    std::cout << "v = { ";
    for (int n : v) {
        std::cout << n << ", ";
    }
    std::cout << "}; \n";
}

```

File streams

```
int main(void)
{
    std::ofstream outFile("out.txt");
    outFile << "Hello World\n";

    std::ifstream inFile("in.txt");
    int a;
    inFile >> a;

    /* Destructor of outFile/inFile automatically closes the files. */
    return 0;
}
```

RAII Thread and Mutex

```
class my_lock_guard {
    std::mutex* mtx;

public:
    my_lock_guard(std::mutex& mtx) : mtx(&mtx) {
        mtx.lock();
    };

    ~my_lock_guard() {
        mtx->unlock();
    };
};
```

RAII Thread and Mutex

```
/* jthread not implemented in g++ 9.4.0 */
class my_jthread {
    std::thread thread;

public:
    template<class Function, class... Args>
    my_jthread(Function&& f, Args&&... args) : thread(f, args...) {};

    ~my_jthread() {
        if(thread.joinable()) {
            thread.join();
        }
    }
};
```

RAII Thread and Mutex

```
void countnWorker(int n, int* a, std::mutex* mtx) {
    for(int i = 0; i < n; ++i) {
        my_lock_guard guard(*mtx);
        int tmp = *a;
        std::this_thread::sleep_for(std::chrono::microseconds(1));
        *a = tmp + 1;
    }
}

void countTwice2(int* counter, int val) {
    std::mutex counterMutex;

    my_jthread thrd1(countnWorker, val, counter, &counterMutex);
    my_jthread thrd2(countnWorker, val, counter, &counterMutex);
}
```

RAII Thread and Mutex

```

int main(void)
{
    int counter = 0;
    countTwice2(&counter, 10);

    std::cout << "final counter value: " << counter << '\n';

    return 0;
}

```

Shared Pointer

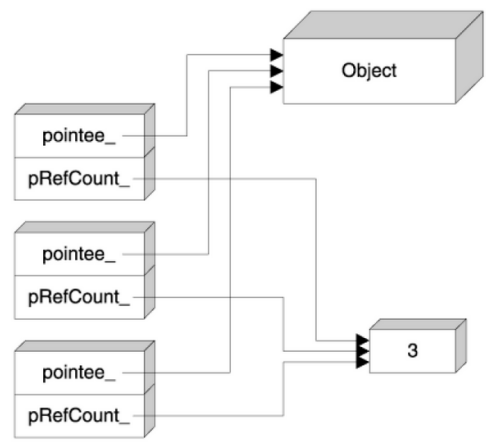


image source: <https://stackoverflow.com/questions/9200664/how-is-the-stdtr1shared-ptr-implemented>

Smart Pointers

- Wrappers around heap pointer.
- `std::unique_ptr`
 - Frees the memory on deletion.
 - Only one `unique_ptr` pointing to a specific address may exist.
 - May not be *copied* only *moved*.
- `std::shared_ptr`
 - Keeps reference counter.
 - Last shared pointer frees the memory.
 - Multiple `shared_ptr`s pointing to the same address may exist.

Shared Pointer

```

template<class T>
class my_shared_ptr {
    T* ptr;
    int* ref_counter;

public:
    my_shared_ptr(T* ptr);
    my_shared_ptr(my_shared_ptr<T>& other);

    ~my_shared_ptr();

    T& operator*();
};

```

[lec13/shared_ptr.cpp](#)

Shared Pointer

```

template<class T> my_shared_ptr<T>::my_shared_ptr(T* ptr)
    : ptr(ptr), ref_counter(new int(1)) {}
template<class T> my_shared_ptr<T>::my_shared_ptr(my_shared_ptr<T>&
    other)
    : ptr(other.ptr), ref_counter(other.ref_counter) {
    *ref_counter += 1;
}
template<class T> my_shared_ptr<T>::~my_shared_ptr() {
    if (*ref_counter > 1) {
        *ref_counter -= 1;
    } else {
        delete ref_counter;
        delete ptr;
    }
}

```

Assignment of Objects Holding Resources

- Recall MyArray
- What should the following code do?

```

MyArray array1(10);
MyArray array2 = array1;

```

- Remember MyArray structure

```

class MyArray {
    ulong size_p;
    int* data_p;
};

```

Part II

Part 2 – Move and Copy Semantics (in C++)

Assignment of Objects Holding Resources

```


class MyArray {
    ulong size_p;
    int* data_p;
};

```

- More specifically:
What should happen to data_p?
- Multiple options:
 - Copy the pointer.
 - Allocate new array and copy data.
 - Copy the pointer, but invalidate original data.

Assignment of Objects Holding Resources


- Copy the pointer.

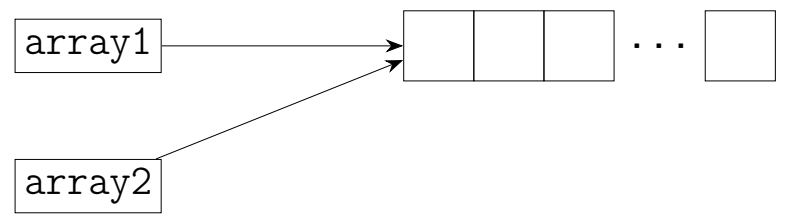

- PROBLEM: Which object handles deletion of the array.
- This is similar to the behavior of `shared_ptr`.

Assignment of Objects Holding Resources


- Copy the pointer, but invalidate original data.

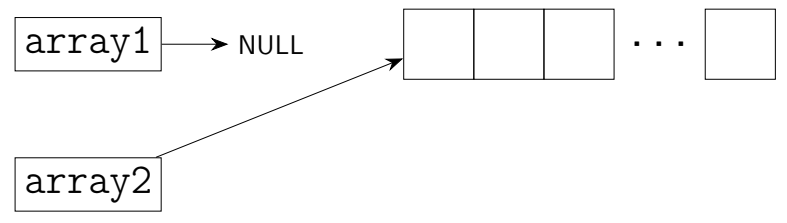

- PROBLEM: Original array becomes invalid.
- Similar to the behavior of `unique_ptr`.

Assignment of Objects Holding Resources


- Allocate new array and copy data.

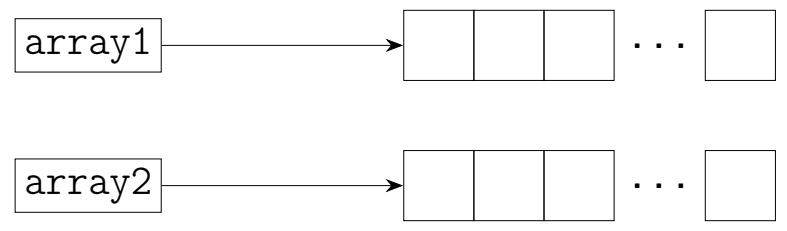


- PROBLEM: Possible redundancy if array1 is about to be deleted (e.g. returning from function).

Move and Copy Semantics

- Copy:

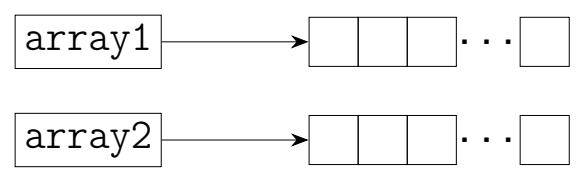

- Move:

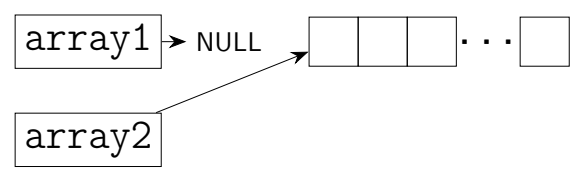

Value Categories

- Each expression in C++ has a type and value category.
- lvalue** – ‘left value’ (L = r)
 - An expression whose evaluation determines the identity of an object or function¹ – glvalue
 - Is not xvalue.
- rvalue** – ‘right value’ (l = R)
 - An expression whose evaluation computes the value of an operand of a built-in operator (such as prvalue has no result object), or initializes an object.¹ – prvalue
 - Object whose resources can be reused.¹ – xvalue

¹en.cppreference.com/w/cpp/language/value_category

lvalue

- lvalue** – ‘left value’ (L = r)
- Can be assigned to.
 - Variable name
 - Function/operator call whose value is a (lvalue) reference, such as the assignment operator `a = b`.
 - Pre-increment/decrement `++i`, `--i`.
 - Indirection `*p`.
 - Subscript `a[i]`.
 - and more¹

¹en.cppreference.com/w/cpp/language/value_category

rvalue

- rvalue** – ‘right value’ (l = R)
- Cannot be assigned to.
 - Function/operator call whose value is non-reference.
 - Post-increment/decrement `i++`, `i--`.
 - All built in arithmetic operators `a + b`, `a % b`, ...
 - Address-of expression `&a`;
 - `std::move(T)`
 - And more¹

¹en.cppreference.com/w/cpp/language/value_category

rvalue / lvalue reference

- lvalue reference T&**
 - Alias to an existing object.
 - Can be initialized by an lvalue.
- rvalue reference T&&**
 - Extend lifetime of temporary object.¹ e.g. result of an operator


```
std::string s = "hello";
std::string&& r = s + s;
```
 - Can be initialized by an rvalue.

¹en.cppreference.com/w/cpp/language/value_category

Copy Semantics

- Copy constructor: `T(const T&)`
 - Constructs object as a copy of another object.
- Copy assignment: `T& operator=(const T&)`
 - Copies an object in another object
 - Frees resources previously owned by the modified object.
- Any resources required by an object for a given instance must be acquired.

Copy Semantics of MyArray

```
MyArray::MyArray(const MyArray& other)
    : size_p(other.size_p), data_p(new int[size_p])
{
    std::cout << "MyArray(&)" << '\n';
    for(int i = 0; i < size_p; ++i) {
        data_p[i] = other.data_p[i];
    }
}
MyArray& MyArray::operator=(const MyArray& other) {
    std::cout << "MyArray operator=(&)" << '\n';
    delete[] data_p;
    size_p = other.size_p;
    data_p = new int[size_p];
    for(int i = 0; i < size_p; ++i) {
        data_p[i] = other.data_p[i];
    }
    return *this;
}
```

Move Semantics

- Move constructor: `T(const T&&)`
 - Constructs an object using resources of another object.
- Move assignment: `T& operator=(T&&)`
 - Moves an object into another.
 - Ownership of resources is transferred.
 - Frees resources previously owned by the modified object.
- No new resources are allocated.
- It is assumed the source object will be destroyed after the move.

Move Semantics of MyArray

```
MyArray::MyArray(MyArray&& other)
    : size_p(other.size_p), data_p(other.data_p)
{
    std::cout << "MyArray(&&)" << '\n';
    other.size_p = 0;
    other.data_p = nullptr;
}
MyArray& MyArray::operator=(MyArray&& other) {
    std::cout << "MyArray operator=(&&)" << '\n';
    delete[] data_p;
    size_p = other.size_p;
    data_p = other.data_p;
    other.size_p = 0;
    other.data_p = nullptr;
    return *this;
}
```

Summary of the Lecture

Topics Discussed

- Resource Acquisition-Release pattern.
- RAII using automatic destructor call
- Example RAII array wrapper
- RAII handling of other resources
 - Files
 - Mutexes
 - Threads
 - Smart pointers
- Assignment of object with resources.
- lvalue and rvalue
- lvalue reference and rvalue reference
- Move and copy semantics