

1 Introduction

Course Organization

`https://cw.fel.cvut.cz/wiki/courses/osw`

1.1 Sharing meaning of data

1.1.1 Some examples of misunderstanding

One event or two events?

DID YOU KNOW



Awaken the mind.

Just months before 9/11, the World Trade Center's lease was privatized and sold to Larry Silverstein.

Silverstein took out an insurance plan that 'fortuitously' covered terrorism.

After 9/11, Silverstein took the insurance company to court, claiming he should be paid double because there were 2 attacks.

Silverstein won, and was awarded \$4,550,000,000.


What is an event ? How many events occurred at 9/11 – One or Two ?

Knowledge Management

9/11 ... matter of billions of USD

source:<https://www.metabunk.org/larry-silversteins-9-11-insurance.t2375>

What is the trend of Runway Incursion incidents at an airline operator ?

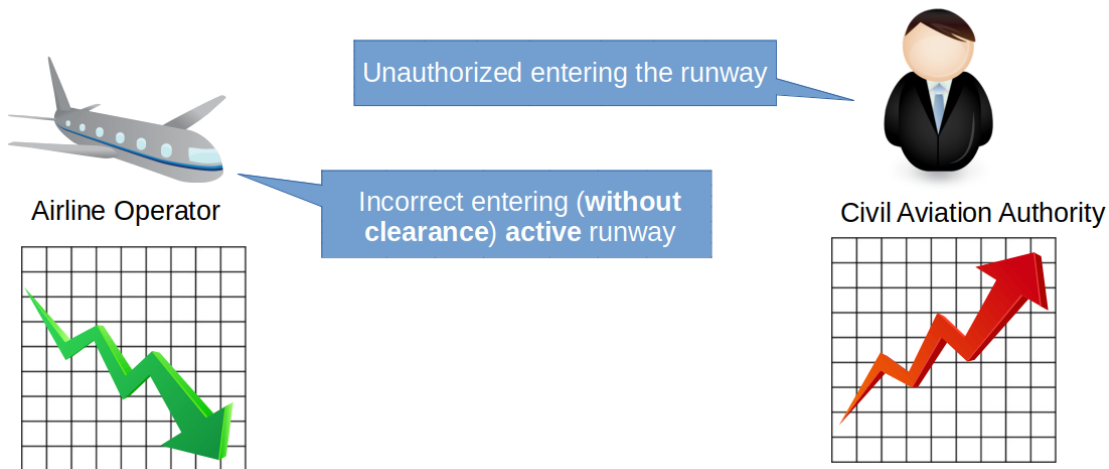


1.1.2 What is a dataset about?

What is inside a dataset?




See OpenData portal of Prague OpenData portal of Prague

What is a building?

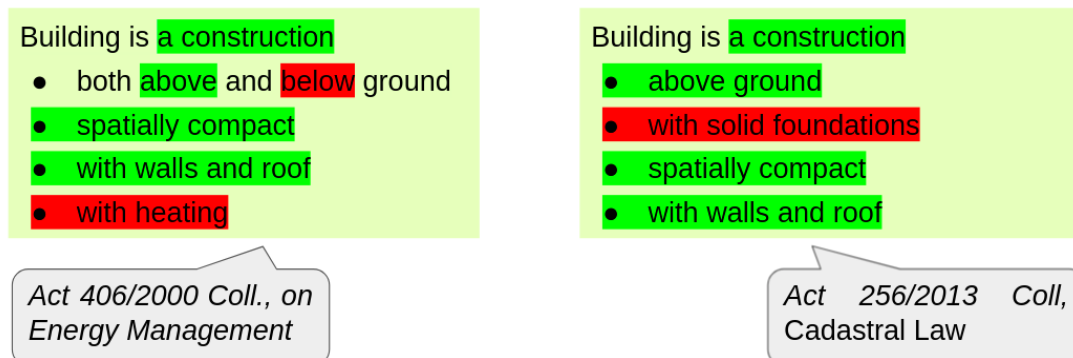

1 Introduction

But things are even more complicated ...

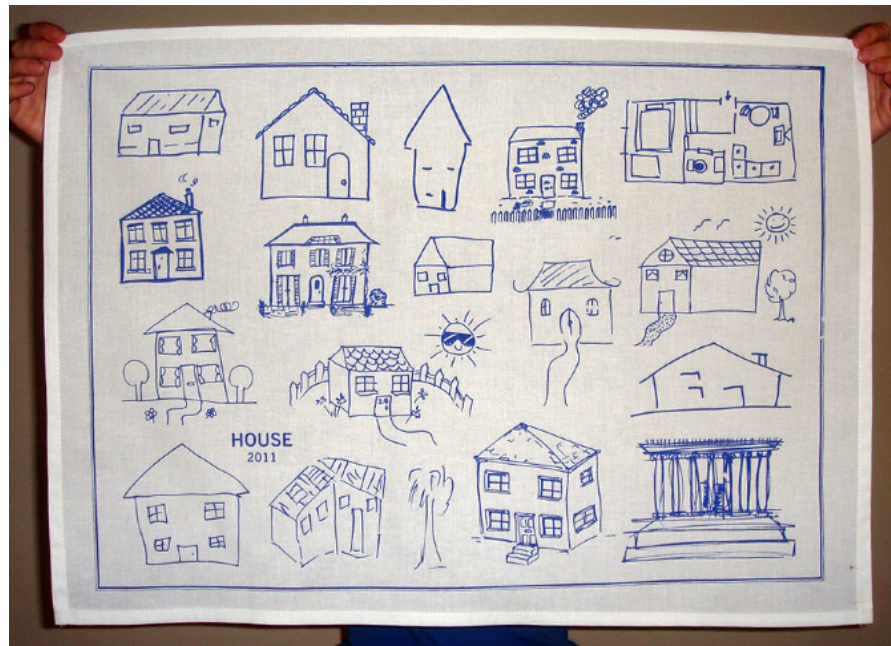

What is a building?



1. ... is a **construction** which is **heated**.

2. ... is a **construction** to provide **protection** to their users or internal equipment and is typically **closed** and has a **permanent position**.

ČSN EN 15643-5 -Sustainability of construction works

Building


3. ... is a **construction above ground** which is **spatially-compact** and **closed by walls and roof**.

Act 256/2013 Coll., Cadastral Law


4. ... is a **construction above and below ground** which is **spatially-compact** and **closed by walls and roof** and is **heated or cooled**.

Act 406/2000 Coll., on Energy Management

What is a building?

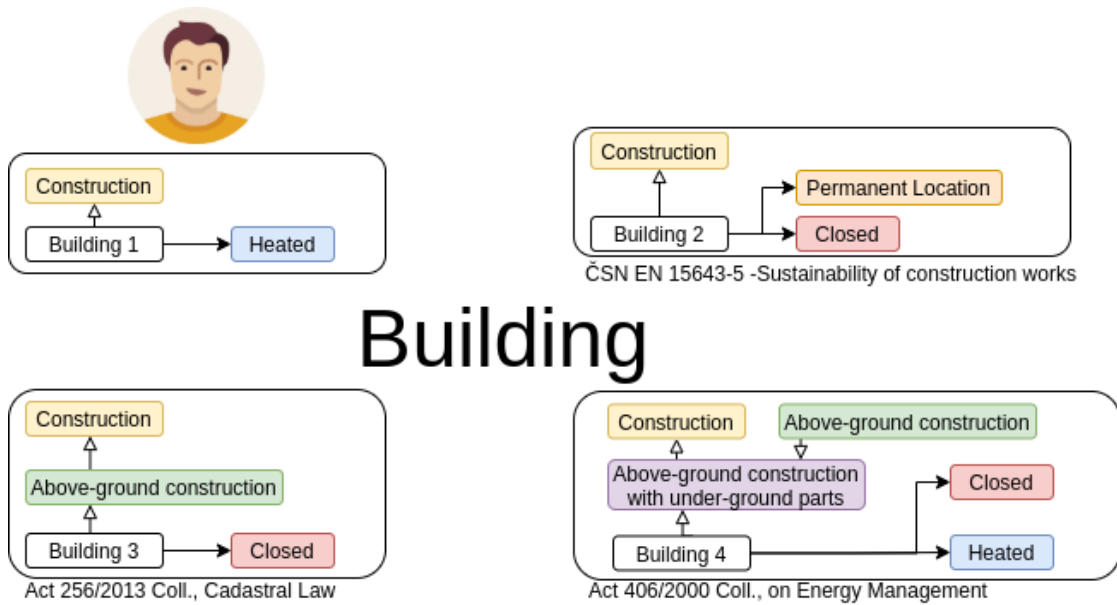

New knowledge can be inferred

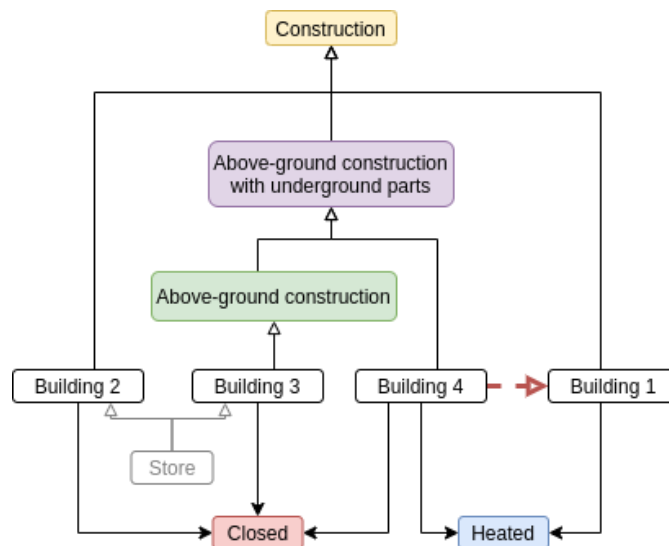

1.1.3 From conceptual models to ontologies

Ontological Conceptual Modeling

- a way to **capture** and **explain** meaning.
- the language must be understandable to non-experts (UML max)
- the language must be computable – we want to use the models to infer new knowledge or validate data

1 Introduction

About ontologies


Ontologies

are **formal specifications of conceptualization**.

Ontologies help to stabilize the knowledge, to share meaning both among computers and among people. Use-cases include


- Data Integration
- Semantic Web
- Open (Linked) Data

First, People Need to Understand Each Other

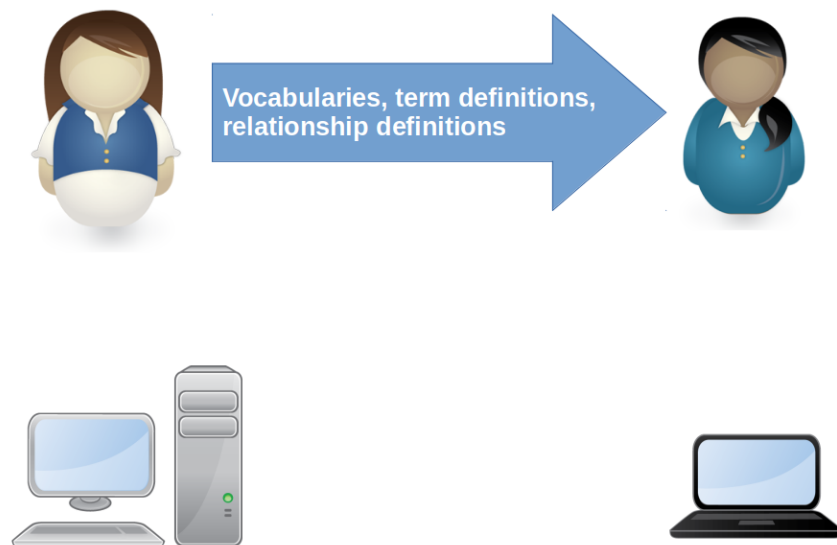


Second, People Need to Explain Things to Computers

1.1 Sharing meaning of data

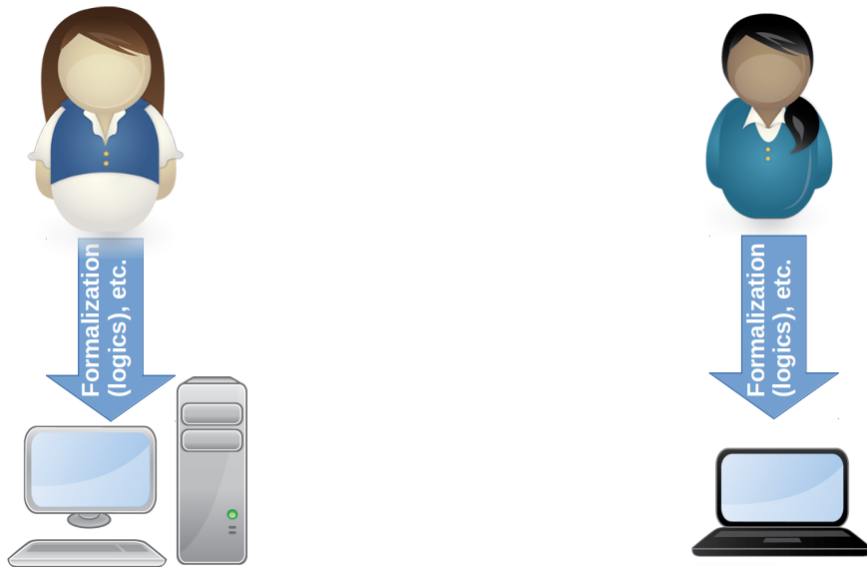


Third, Computers Can Understand One Another

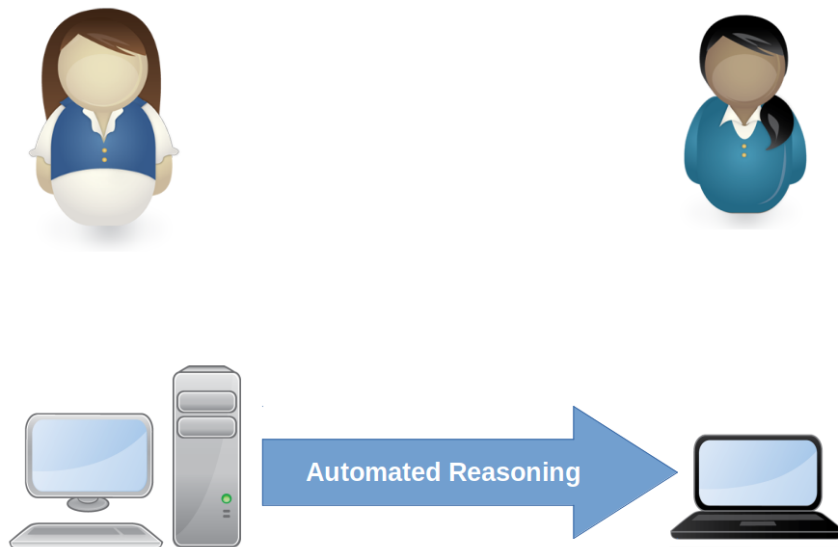


Ontology

Explicit Conceptualization of Shared Meaning

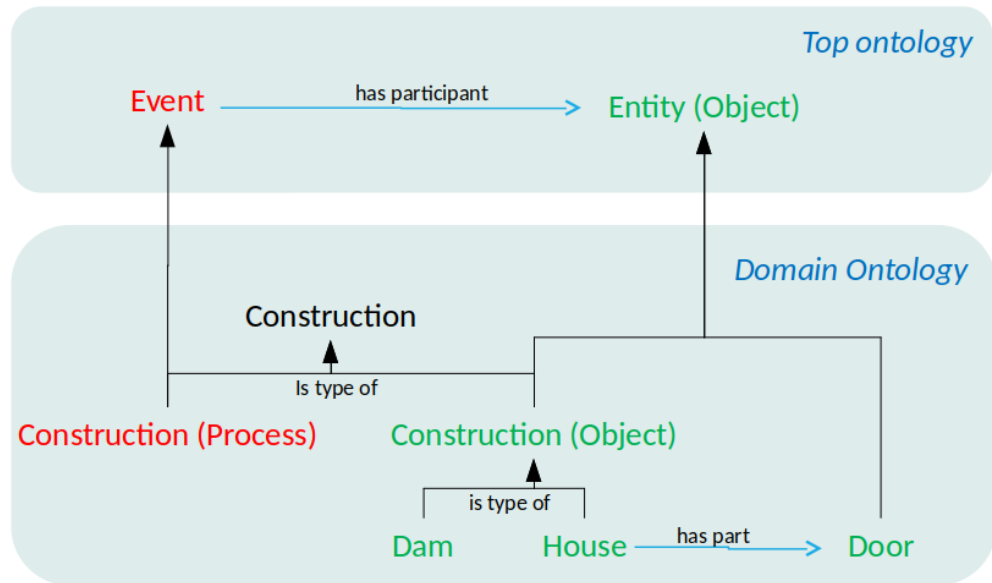


Example Top-Level Ontology

Small part of Unified Foundational Ontology (UFO)

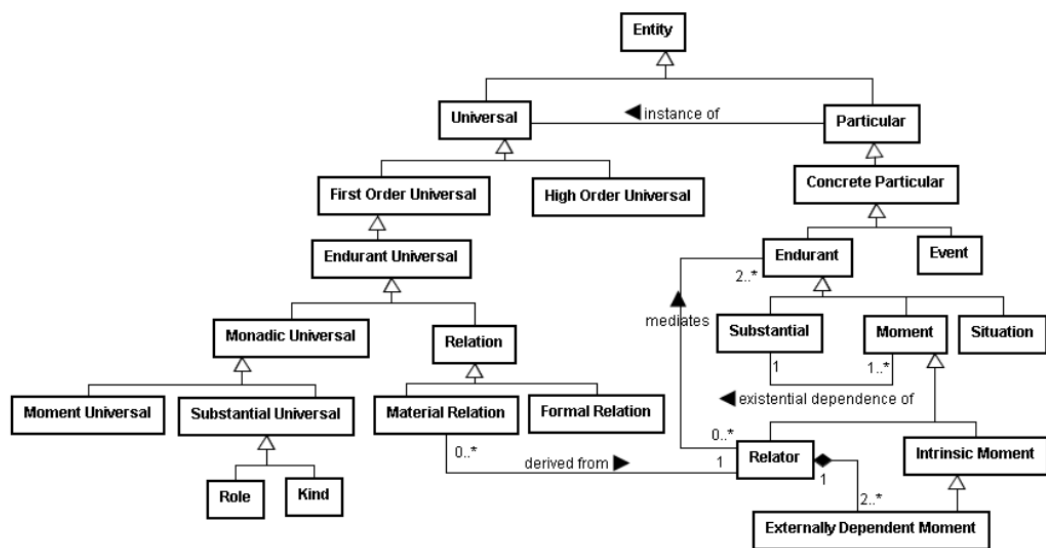

Example Ontology Hierarchy

Each helicopter is also an aircraft.

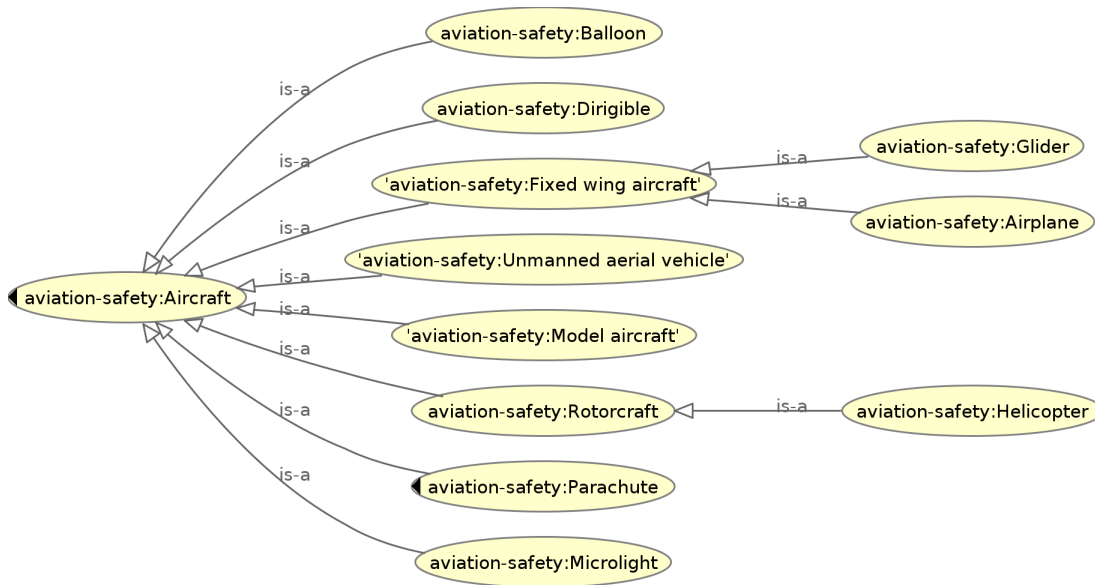

Ontologies $\neq$ Taxonomies


Taxonomies = just a single type of relationship.

Construction	→ broad meaning (object, construction site, process)
Dam	
House	→ broad meaning (dwelling, construction)
Door	→ specific meaning (not type of house, but its part)


1.1.4 Ontologies for data integration

Data Integration Scenario


1 Introduction

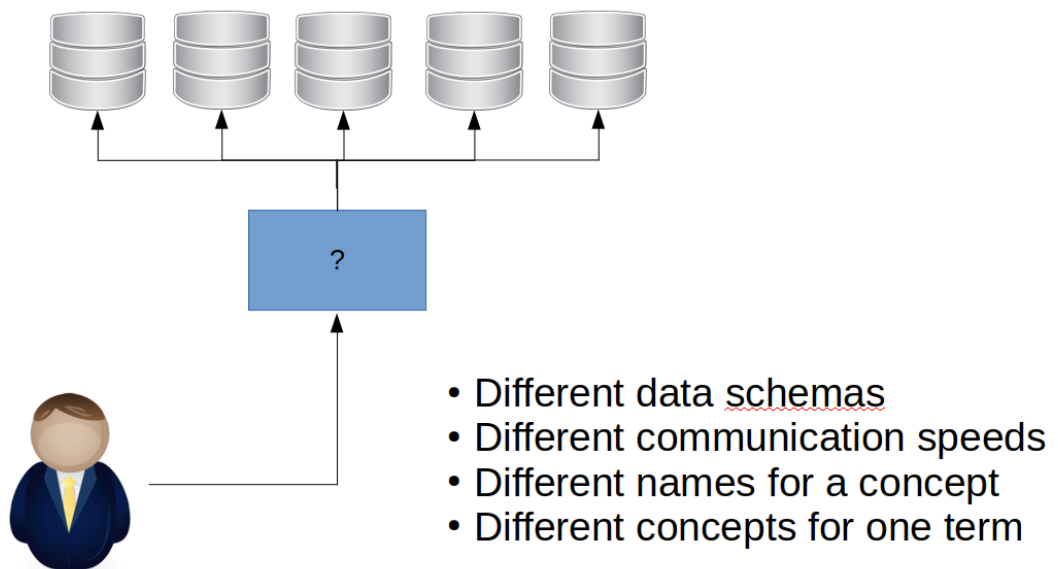

Data Integration Scenario

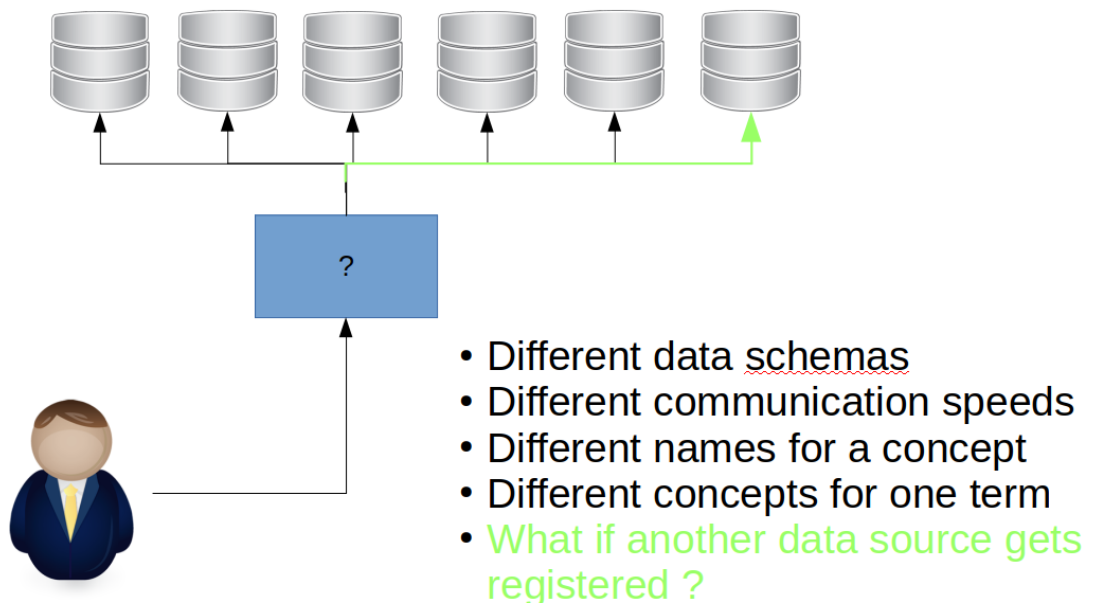


Use-case – HealthCare Data Integration

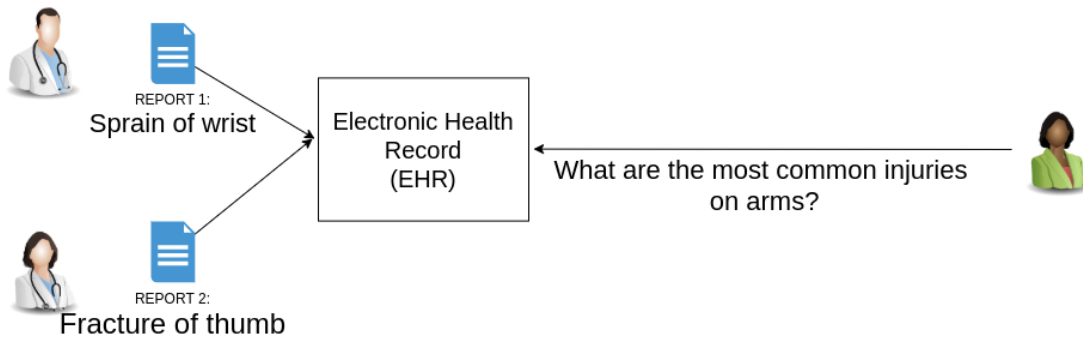

SNOMED-CT

Systematized Nomenclature of Medicine - Clinical Terms

- ~ 300k clinical concepts
- international standard – adopted e.g. in UK, USA, Australia
- uses ontology reasoning to classify/query the concepts

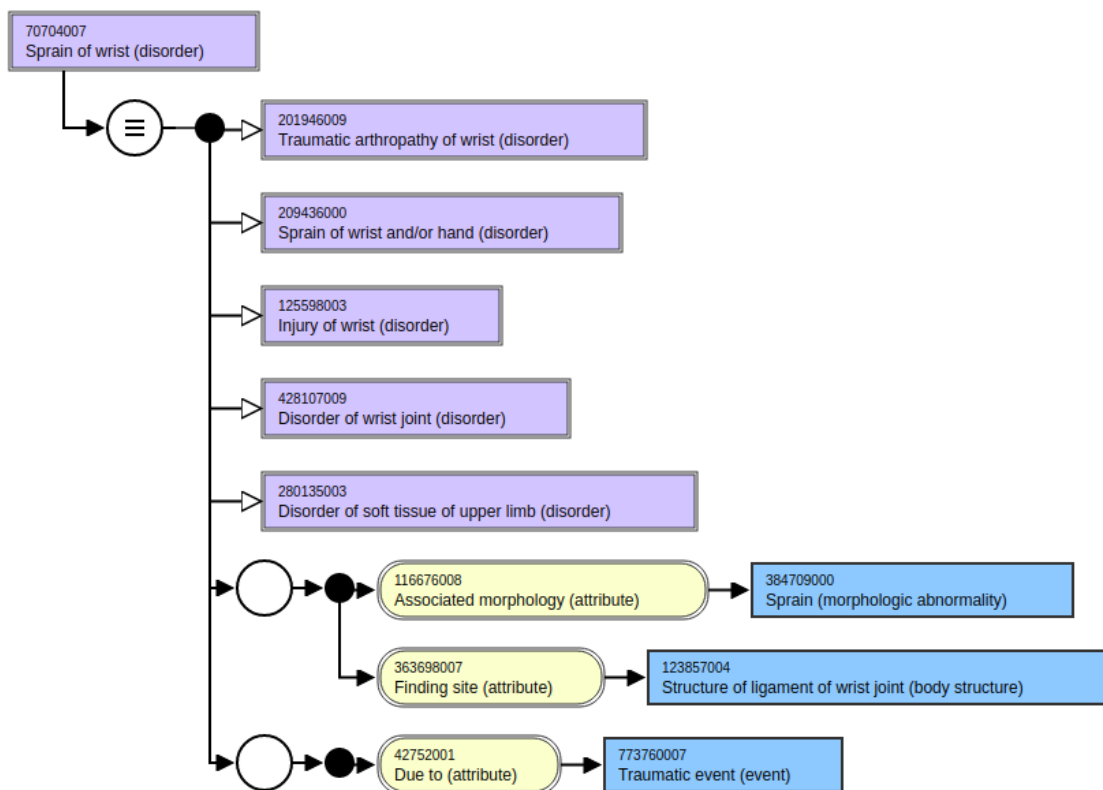

SNOMED-CT

Systematized Nomenclature of Medicine - Clinical Terms


<https://browser.ihtsdotools.org/?perspective=full&conceptId1=70704007&edition=MAIN/2020-07-31&release=&languages=en>

1.2 Semantic Web

Current Web vs. Semantic Web

- SoA – semistructured HTML or XML data. There is vast amount of search engines like Google, Yahoo, MSN, etc. Many of them are invaluable, but as the engines use just keywords and/or some natural language preprocessing methods, the search results contain lots of irrelevant results that need to be processed manually.
- How to make web search more efficient ?
 - more expressive power for web designers to capture complexities – SW languages (RDF(S), OWL),
 - more efficient search engines to handle SW languages – new inference techniques for these languages,
 - better search engines interfaces – more expressive query languages
- the amount of (unstructured) data is steadily growing

Semantic search

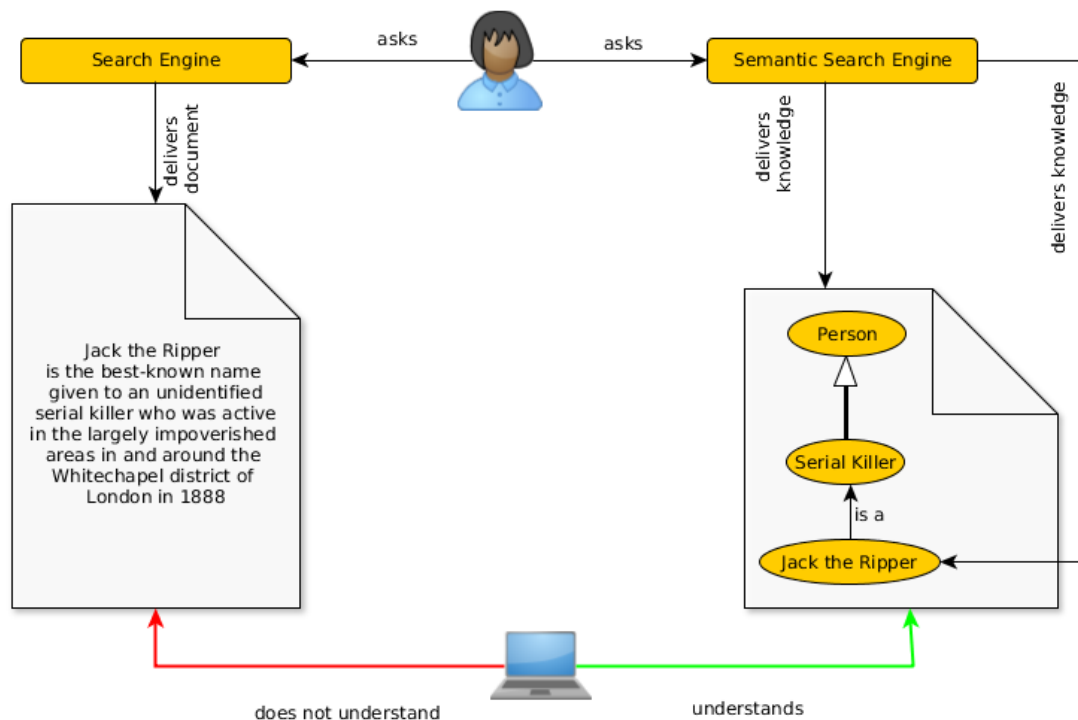

Ontologies and Semantic Web

ontology has many definitions, but let's consider it a **formal representation of a complex domain knowledge that is shared with others to ensure intelligent system interoperability**,

semantic web is *an extension of the current Web in which information is given well-defined meaning, better enabling computers and people to work in cooperation.* (cit. Semantic Web. Tim Berners-Lee, James Hendler and Ora Lassila, Scientific American, 2001)

Idea of Semantic Web

- W3C web page - <http://www.w3.org/2001/sw>
- The data format will be either RDF(S) or OWL,
- Reasoners for RDF(S) can be used for partial derivation in OWL,
- Reasoners for OWL can be used for derivation in RDF(S)

Unique Data Identification – URIs

Semantic web speaks about resources.

URI is a unique identifier for addressing web resources in the form

```
<scheme name> : <hier. part> [ ? <query> ] [ # <fragment> ]
```

. HTTP scheme is used typically.

URN a URI with *scheme name* equal to 'urn'; used e.g. in SWRL atom identification,

URL a URI that can be resolved to a content using the protocol (e.g. HTTP),

IRI generalization of URIs allowing non-ascii characters. IRI is the standard identifier for OWL.

Open World Assumption


The semantic web inference must take into account that we handle *incomplete knowledge*.

Description

Open world (OWA): Everything that cannot be proven is unknown, Closed world (CWA): Everything that cannot be proven is false.

Statement : "John is a Man." Query: "Is Jack a Man ?" OWA Answer: "I don't know." CWA Answer: "No."

Semantic Web Stack

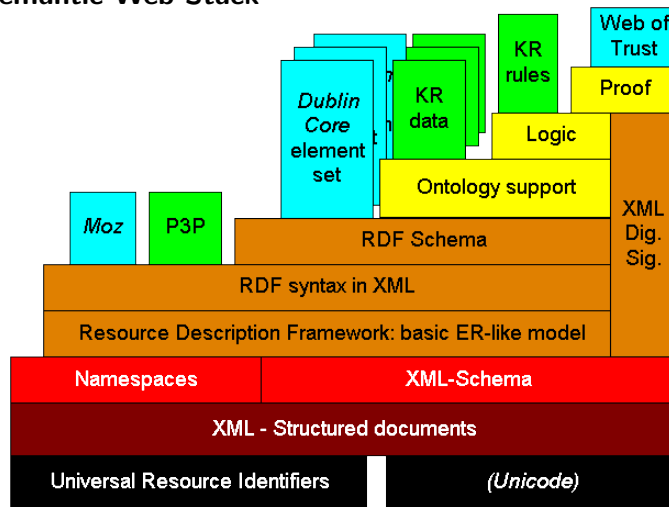

Taken from <http://www.w3.org/2000/Talks/0906-xmlweb-tbl/slide9-0.html>, by Tim Berners Lee.

1.2.1 Linked Data

How to publish data related to other ?

Based on semantic web principles, Linked Data provide means to efficiently connect data created by different publishers.

- Web of Documents – WWW
 - webpage – readable by human
 - identifiers – IRI
 - transfer protocol – HTTP
 - unified language – HTML
- Web of Data – Linked Data
 - webpage – readable by machine
 - identifiers – IRI
 - transfer protocol – HTTP
 - unified language – RDF

Linked Data [Heath2011] is a method for publishing structured and interlinked data on the web, building up on URIs, HTTP and RDF technologies.

Linked Data Principles

1. Use URIs as names for things.
2. Use HTTP URIs so that people can look up those names.

3. When someone looks up a URI, provide useful information, using the standards (RDF, SPARQL).
4. Include links to other URIs, so that they can discover more things.

(Tim Berners-Lee, 2009 – <http://www.w3.org/DesignIssues/LinkedData.html>)

URIs satisfying the third point are **dereferencable**.

Document vs. its Content

When designing a URI scheme it is necessary to ensure proper distinction between a **document** and its **content**

Example

```
@prefix people: <http://example.com/people/>
people:John people:likes people:Mary
```


Is <http://example.com/people/Mary> a web document or a resource ? (Consider semantic consequences of each option).

This is handled by two strategies – 303 URIs and Hash URIs, each being suitable for different scenarios.

303 URIs

- 303 URIs are of the form <http://id.example.org/people/Alice>
- HTTP server sends 303 redirect to the corresponding **document** of the requested **resource**.
- HTTP client makes another request, based on Accept headers, the RDF/HTML version is delivered.


1 Introduction

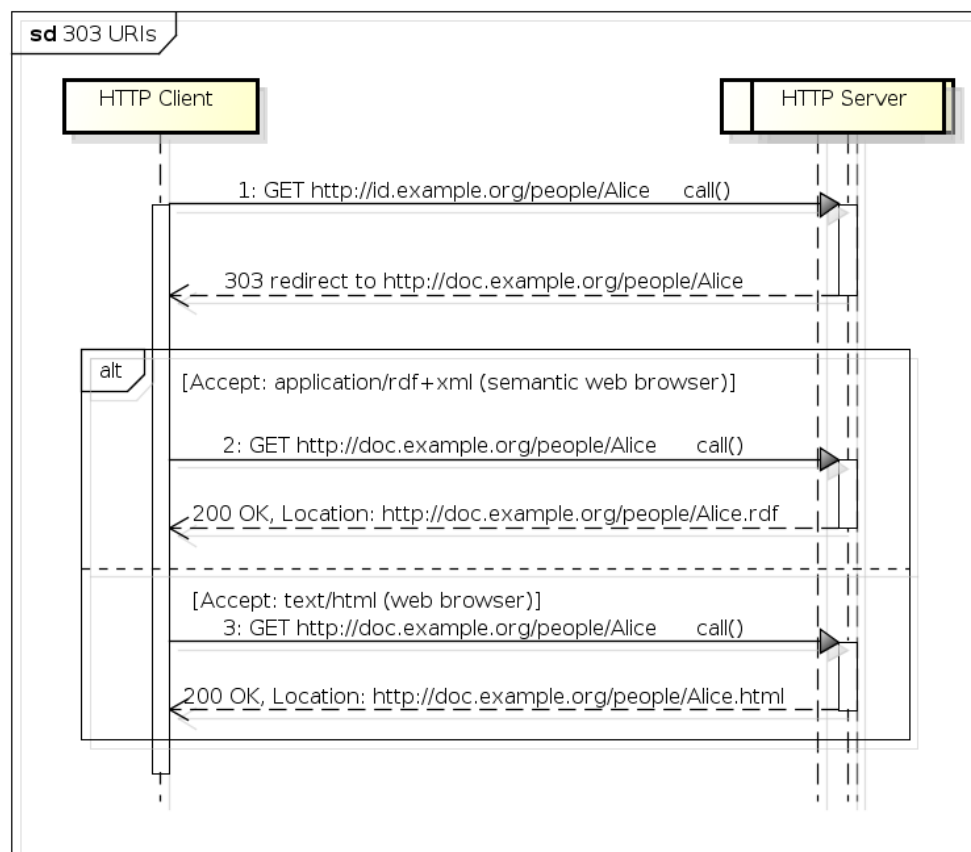

powered by Astah

Hash URIs

- Hash URIs are of the form `http://example.org/people#Alice`
- HTTP server sends the whole **document** of either RDF or HTML type based on Accept headers.
- Within the document, the HTTP client gets the particular entity after the hash symbol.

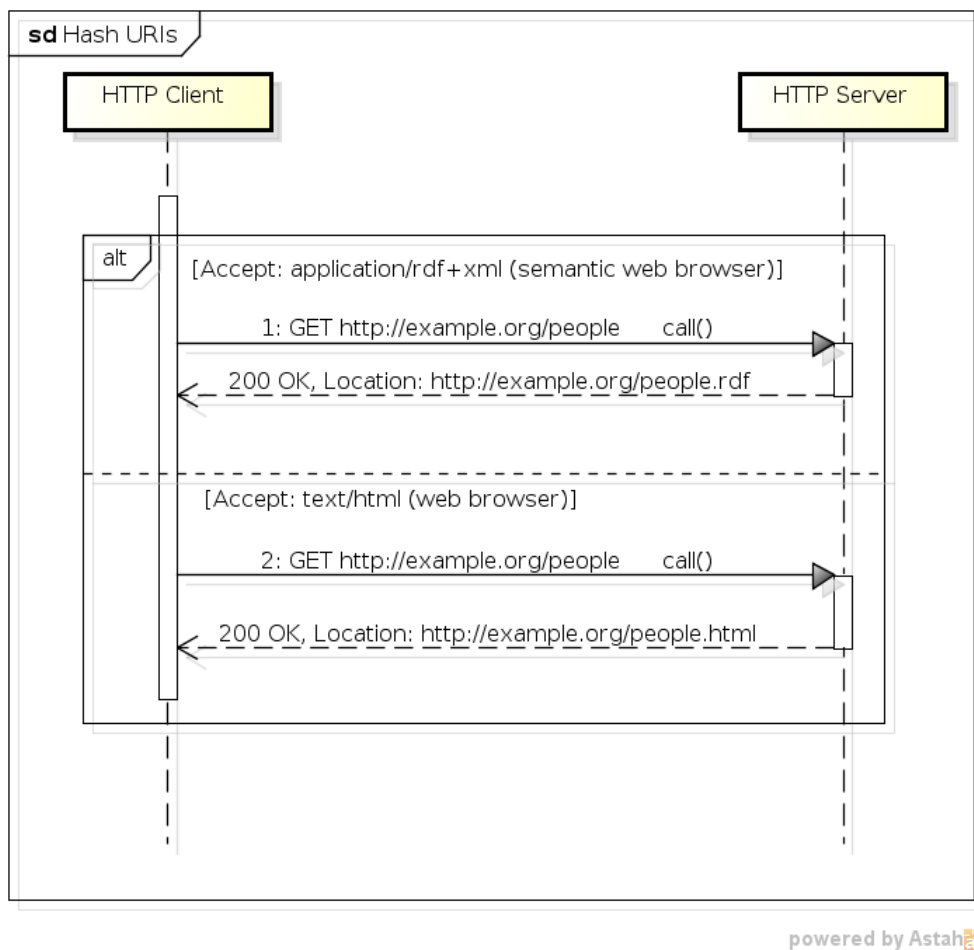

303 URIs vs. Hash URIs

Hash URIs are suitable for small datasets that will hardly grow up,

303 URIs are suitable for large datasets for the sake of good performance.

Reason

The fragment part of an URL (after #) is evaluated on the HTTP client (not the HTTP server), so the HTTP client must fetch all data first and then filter them for the subsequent use locally.

Linked data presentation

LodView (2023, <https://github.com/LodLive/LodView>) a publication tool for Linked Data

1 Introduction

Marmotta (2018, <https://github.com/apache/marmotta>) is a platform for publishing Linked Data (contributed from Linked Media Framework),

Callimachus (2017, <https://github.com/3-Round-Stones/callimachus>) is an application server for linked data applications. To be explored in the tutorials,

D2R (2015, <https://github.com/d2rq/d2rq>) is a platform for publishing relational database data in the form of Linked Data.

Pubby (2014, <https://github.com/cygri/pubby>) is a simple Linked Data publication server connectable to SPARQL endpoints,

1.2.2 Use-case: Open Data

CKAN and DataHub

CKAN (<http://ckan.org/>) is an open-source data portal for publishing, sharing and search of datasets.

It is prominently hosted at <http://datahub.io>. Datasets on DataHub can be sub-

1.2 Semantic Web

The screenshot shows the DataHub website interface. At the top, there's a navigation bar with the DataHub logo and links for Datasets, Organizations, About, Blog, Help, and a search bar. Below the navigation bar, the main heading is "/ Datasets". On the left side, there are two filters: "Organizations" and "Tags". The "Organizations" filter lists various organizations like Global (5), Linking Open Data C... (2), VU University Amste... (1), The Getty Trust (1), Public Domain (1), Open GLAM (1), Library Linked Data (1), Czech Technical Uni... (1), and Civil Society (1). The "Tags" filter lists tags like lod (6), culturalheritage (6), publications (4), culture (4), cultural (4), published-by-producer (3), museum (3), heritage (3), publicdomain (2), and package-type.catalog (2). On the right side, there's a search bar with the text "cultural heritage". Below the search bar, it says "14 datasets found for 'cultural heritage'" and "Order by: Relevance". The first result is "Swedish Open Cultural Heritage" with a flame icon. It describes SOCH as a set of 3.4 million cultural heritage objects harvested from a large number of museums and other local, regional and national cultural heritage... Below the description are links for HTML, application/rd+xml, and example/rd+xml. The second result is "Culture Grid" with a description about the website's purpose. Below the description are links for solr, sru, and oai. The third result is "Flickr - The Commons" with a description about its goals. The fourth result is "Amsterdam Museum as Linked Open Data in the Europeana Data Model" with a flame icon. It describes the Amsterdam Museum dataset and its metadata. Below the description are links for apisparql, HTML, api/rd, and example/rd+xml. The fifth result is "British Museum Collection" with a flame icon. It describes the Linked Data and SPARQL service for the British Museum's Collection Online.

mitted to the Linked Data Cloud.

Datasets search

`https://datahub.io/search?q=coronavirus`

Národní katalog otevřených dat (NKOD)

1 Introduction

OTEVŘENÁ DATA

Datové sady Poskytovatelé Klíčová slova Další ▼

Poskytovatelé (1)

HLAVNÍ MĚSTO PRAHA (136)

Klíčová slova (18)

Praha (136)

Česká republika (3)

Digitální mapa Prahy (1)

Lítačka (1)

budovy (1)

district (1)

děti (1)

Zobrazit další

Formáty (10)

Esri Shape (98)

Zipped GML (95)

GeoJSON (80)

Vyhledat:

Zobrazit pokročilé filtry Smaž filtry Název vzestupně ▼

136 datových sad nalezeno

Praha

Absolutní výšky budov

HLAVNÍ MĚSTO PRAHA

Klasifikovaný rastr vytvořený z digitálního modelu zástavby zobrazuje absolutní nadmořské výšky budov.

TIFF Plain text

Bonita klimatu

HLAVNÍ MĚSTO PRAHA

Bonita klimatu - komplexní charakteristika dle všech hodnocených klimatologických hledisek Data byla vytvořena pomocí prostředí ArcGIS 9.2, Spatial Analyst. Vrstva byla převedena z rastrové vrstvy bonita, s horizontálním rozlišením 25m. Pro realizaci této mapy byla využita tato data: Digitální referenční mapa Praha-bloková mapa budo...

GeoJSON Zipped GML Esri Shape ZIP

Bonita klimatu z hlediska míry zastavěnosti území


HLAVNÍ MĚSTO PRAHA

Data byla vytvořena pomocí prostředí ArcGIS 9.2, Spatial Analyst. Vrstva byla převedena z rastrové vrstvy bonita, s horizontálním rozlišením 25m. Pro realizaci této mapy byla využita tato data: Digitální referenční mapa Praha-bloková mapa budovy Liniová vrstva uličních úseků Vektorová data tématické vrstvy Úprn-doprava-liniová vrstva...

GeoJSON Zipped GML Esri Shape ZIP

<https://data.gov.cz/>

Open Data Levels

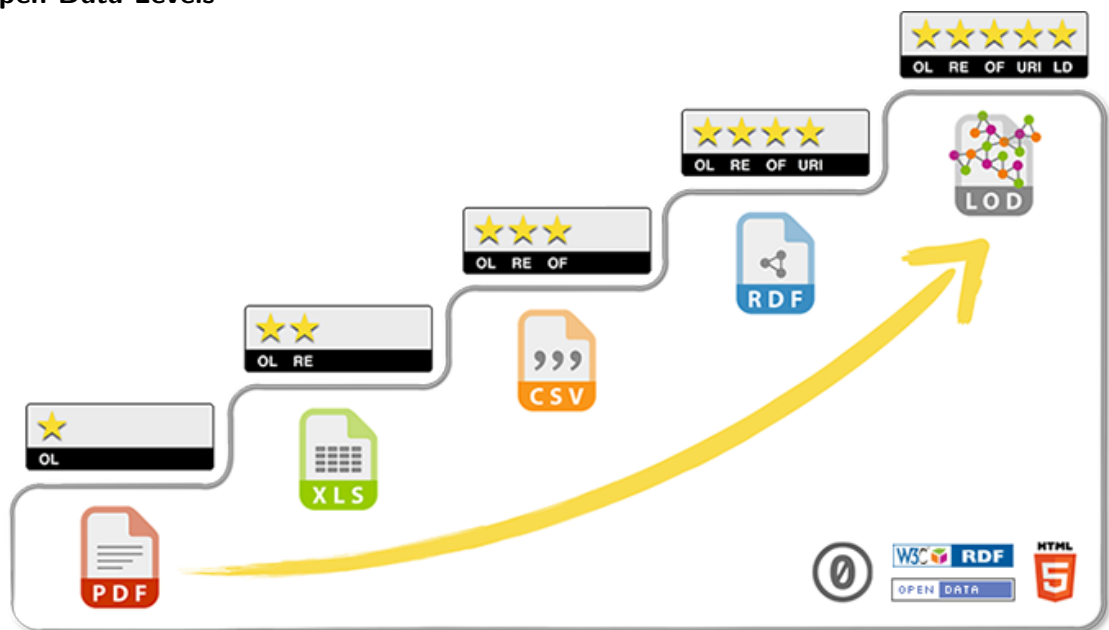

Taken from <http://5stardata.info/cs/>.

Open Data Levels – description

- ★ Available on the web (whatever format) but with an open licence, to be Open

Data

- ★★ Available as machine-readable structured data (e.g. excel instead of image scan of a table)
- ★★★ All the above, plus – Non-proprietary format (e.g. CSV instead of excel)
- ★★★★ All the above, plus – Use open standards from W3C (RDF and SPARQL) to identify things, so that people can point at your stuff
- ★★★★★ All the above, plus – Link your data to other people's data to provide context

(Tim Berners-Lee, 2009 – <http://www.w3.org/DesignIssues/LinkedData.html>)

From Open Data to Linked Data

★★★

★★★★

Aircraft (CAA)

s/n	type	operator_ic
1	Boeing 737	1234567
2	Airbus 319	9876543

→ ?

Companies (Business Registry)

company_ic	company_name
1234567	Best Airlines
9876543	Funny Flight School

From Open Data to Linked Data


★★★

★★★★

Aircraft (CAA)

s/n	type	operator_ic
1	Boeing 737	1234567
2	Airbus 319	9876543

→




Companies (Business Registry)


company_ic	company_name
1234567	Best Airlines
9876543	Funny Flight School

From Open Data to Linked Data (4*)


1 Introduction

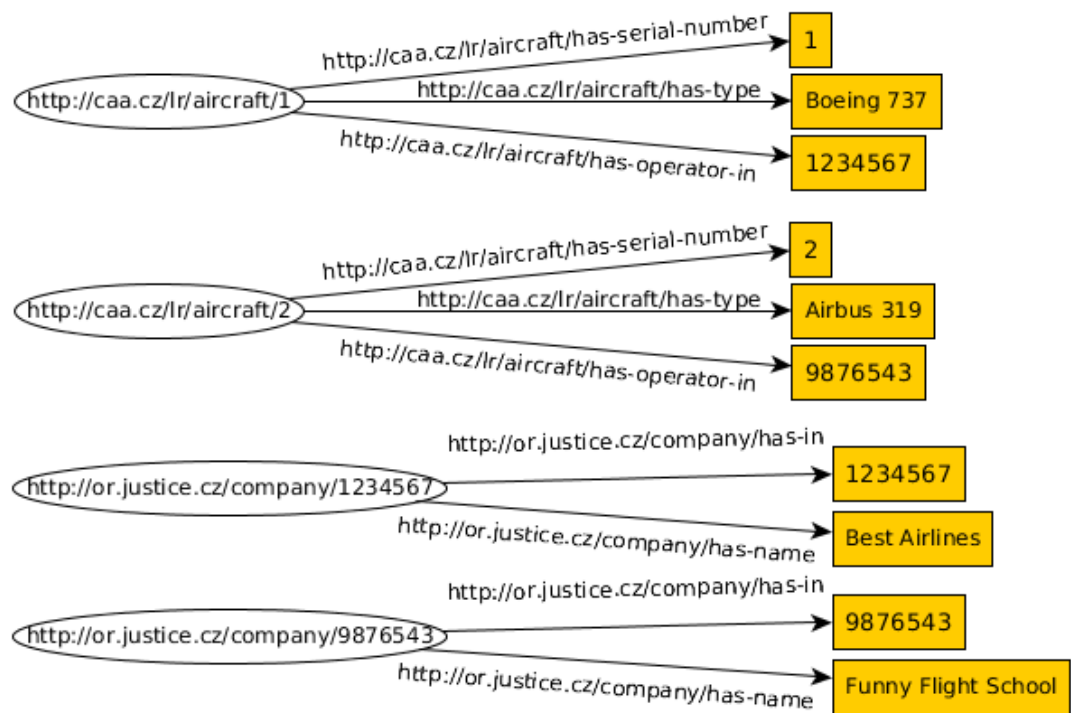

From Open Data to Linked Data (5*)

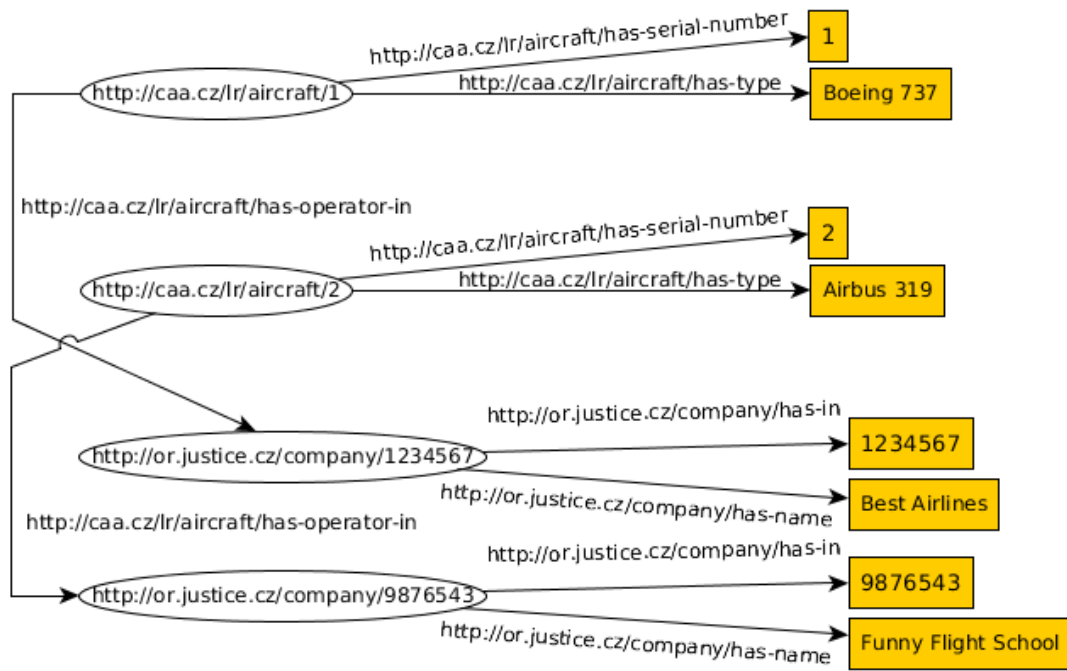

Linked Open Data Cloud

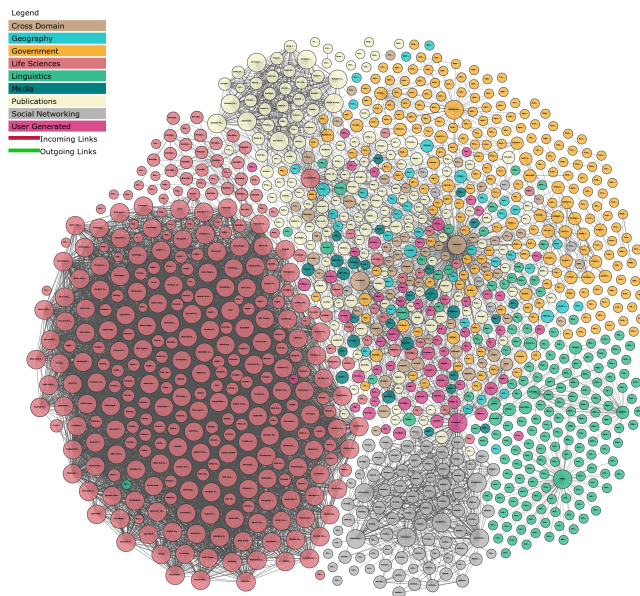

<http://lod-cloud.net/>, 2018

1 Introduction

Linked Data vs. Open Data

linked, not open – enterprise data, master data

linked, open – 5* data

not linked, open – typical case in OpenData

not linked, not open – we do not care

1.2.3 Semantic Web Adopters


Public Sector

- national governments (e.g in Czechia - DIA - <https://data.gov.cz>)
- EU administration - <https://data.europa.eu/en/publications/datastories/linking-data-dataeuropaeu>
- US administration - <https://data.gov/>
- ...


Private Sector

- Google – *Knowledge Graph* (although they do not name it Semantic web – http://semanticweb.com/google-just-hi-jacked-the-semantic-web-vocabulary_b29092)
- Microsoft – Satori, <http://research.microsoft.com/en-us/projects/trinity/query.aspx>
- Facebook – Open Graph Protocol <http://ogp.me/>
- BBC – various datasets in RDF – <http://www.bbc.co.uk/developer/technology/apis.html>
- Ordnance Survey – geographic datasets in RDF – <http://data.ordnancesurvey.co.uk>

BBC Wildlife Ontology

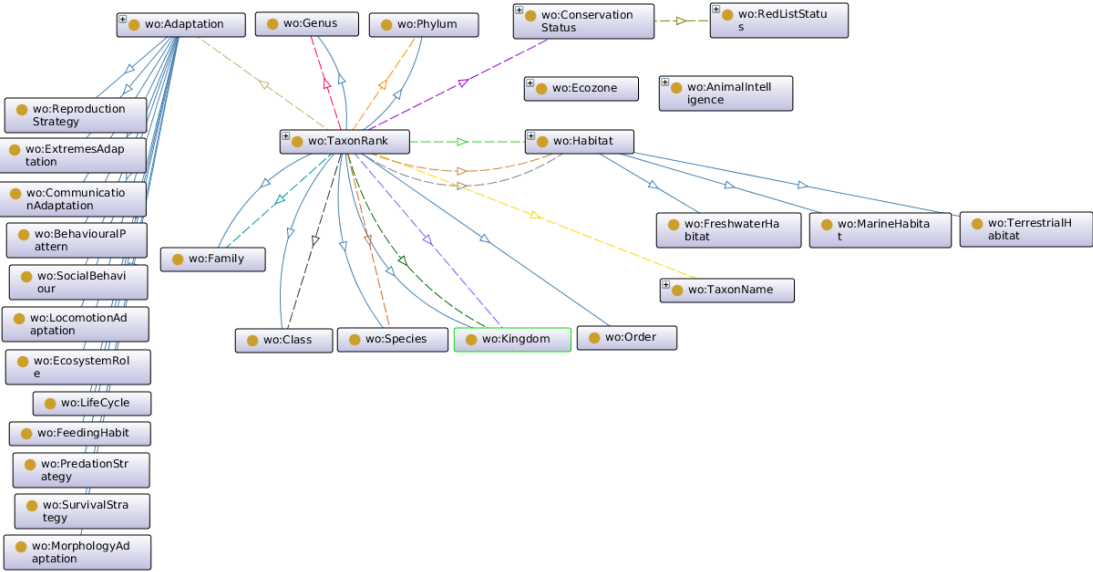

Ordnance Survey Linked Data
Kents Hill, Monkston and Brinklow

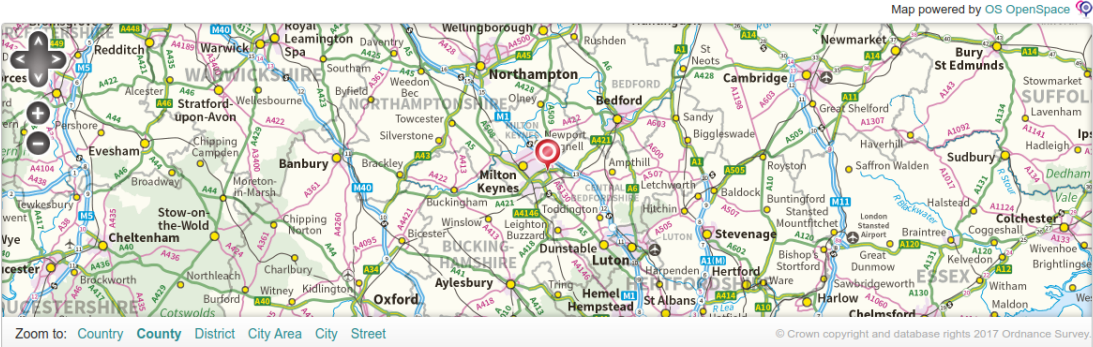

Kents Hill, Monkston and Brinklow is a Parish in Milton Keynes.	
Objects related to "Kents Hill, Monkston and Brinklow"	
Extent	41649-49
In European Region	South East
Within	Milton Keynes
In District	Milton Keynes
Touches	Walton Broughton Old Woughton Milton Keynes Wavendon
Same As	E04001285

Core facts about "Kents Hill, Monkston and Brinklow"	
Type	Parish
Label	Kents Hill, Monkston and Brinklow
Pref Label	Kents Hill, Monkston and Brinklow
Alt Label	Kents Hill, Monkston and Brinklow CP
Northing	238013.803835
Easting	489602.596729
Lat	52.0333028515
Long	-0.695254366017
Area Code	CPC
Gss Code	E04001285

Selected Materials

- RDF Primer – <https://www.w3.org/TR/rdf11-primer/>
- SPARQL Query Language Spec – <https://www.w3.org/TR/2013/REC-sparql11-quer>
- OWL Primer – <https://www.w3.org/TR/owl2-primer/>
- SKOS Primer – <https://www.w3.org/TR/skos-primer/>
- Description Logic Reasoning – P. Křemen, Ontologie a Deskripční logiky. In Umělá inteligence VI., Academia, 2013.
- Linked Data – <http://linkeddata.org>
- Tutorial on RDF/OWL – <https://www.obitko.com/tutorials/ontologies-semantic>