

Grid and Graph based Path Planning Methods

Jan Faigl


Department of Computer Science
Faculty of Electrical Engineering
Czech Technical University in Prague

Lecture 04

B4M36UIR – Artificial Intelligence in Robotics


Grid-based Planning

- A subdivision of C_{free} into smaller cells
- **Grow obstacles** can be simplified by growing borders by a diameter of the robot
- Construction of the planning graph $G = (V, E)$ for V as a set of cells and E as the **neighbor-relations**
 - 4-neighbors and 8-neighbors
- A grid map can be constructed from the so-called occupancy grid maps

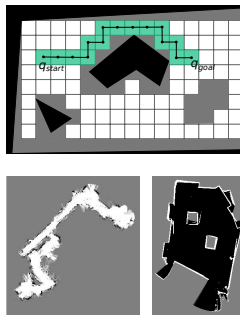

E.g., using thresholding

Example – Wave-Front Propagation (Flood Fill)

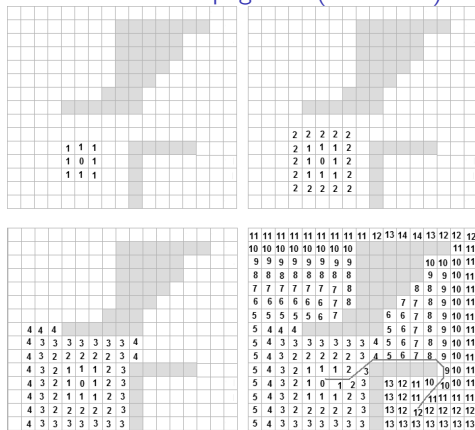


Overview of the Lecture

- Part 1 – Grid and Graph based Path Planning Methods
 - Grid-based Planning
 - DT for Path Planning
 - Graph Search Algorithms
 - D* Lite
 - Path Planning based on Reaction-Diffusion Process *Curiosity*

Grid-based Environment Representations

- Hierarchical planning
 - Coarse resolution and re-planning on finer resolution
- Octree can be used for the map representation
- In addition to squared (or rectangular) grid a hexagonal grid can be used
- 3D grid maps – **octomap**
 - Memory grows with the size of the environment
 - Due to limited resolution it may fail in narrow passages of C_{free}

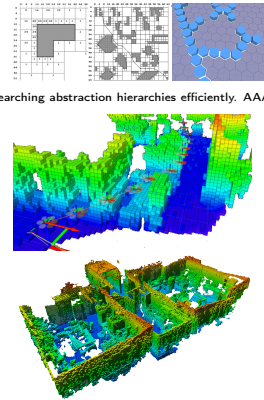


Holte, R. C. et al. (1996): Hierarchical A*: searching abstraction hierarchies efficiently. AAAI.

<https://octomap.github.io>

Path Simplification

- The initial path is found in a grid using 4-neighborhood
- The rayshoot cast a line into a grid and possible collisions of the robot with obstacles are checked
- The “farthest” cells without collisions are used as “turn” points
- The final path is a sequence of straight line segments

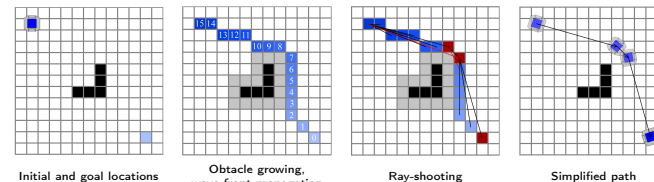


Part I

Part 1 – Grid and Graph based Path Planning Methods

Example of Simple Grid-based Planning

- Wave-front propagation using path simplification
 - Initial map with a robot and goal
 - Obstacle growing
 - Wave-front propagation – “flood fill”
 - Find a path using a navigation function
 - Path simplification
 - “Ray-shooting” technique combined with **Bresenham's line algorithm**
 - The path is a sequence of “key” cells for avoiding obstacles

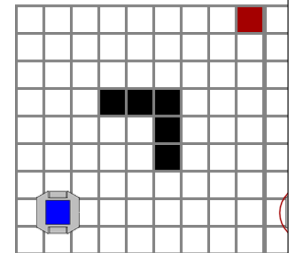

Bresenham's Line Algorithm

- Filling a grid by a line with avoiding float numbers
- A line from (x_0, y_0) to (x_1, y_1) is given by $y = \frac{y_1 - y_0}{x_1 - x_0}(x - x_0) + y_0$

```

1  CoordsVector& bresenham(const Coords& pt1, const Coords& pt2, CoordsVector& line)
2  {
3  // The pt2 point is not added into line
4  int x0 = pt1.c; int y0 = pt1.r;
5  int x1 = pt2.c; int y1 = pt2.r;
6  Coords p;
7  int dx = x1 - x0;
8  int dy = y1 - y0;
9  int steep = (abs(dy) >= abs(dx));
10 if (steep) {
11   SWAP(x0, y0);
12   SWAP(x1, y1);
13   dx = x1 - x0; // recompute Dx, Dy
14   dy = y1 - y0;
15 }
16 int xstep = 1;
17 if (dx < 0) {
18   xstep = -1;
19   dx = -dx;
20 }
21 int ystep = 1;
22 if (dy < 0) {
23   ystep = -1;
24   dy = -dy;
25 }
26
27 int twoDy = 2 * dy;
28 int e = twoDy - dx; // 2*dy - Dx
29 int y = y0;
30 int xDraw, yDraw;
31 for (int x = x0; x != x1; x += xstep) {
32   if (steep) {
33     xDraw = y;
34     yDraw = x;
35   } else {
36     xDraw = x;
37     yDraw = y;
38   }
39   p.c = xDraw;
40   p.r = yDraw;
41   line.push_back(p); // add to the line
42   if (e > 0) {
43     e += twoDyTwoDx; // E += 2*Dy - 2*Dx
44     y = y + ystep;
45   } else {
46     e += twoDy; // E += 2*Dy
47   }
48 }
49 return line;
50 }
    
```

Distance Transform based Path Planning

- For a given goal location and grid map compute a navigational function using *wave-front* algorithm, i.e., a kind of *potential field*
 - The value of the goal cell is set to 0 and all other free cells are set to some very high value
 - For each free cell compute a number of cells towards the goal cell
 - It uses 8-neighbors and distance is the Euclidean distance of the centers of two cells, i.e., $EV=1$ for orthogonal cells or $EV = \sqrt{2}$ for diagonal cells
 - The values are iteratively computed until the values are changed
 - The value of the cell c is computed as

$$cost(c) = \min_{i=1}^8 (cost(c_i) + EV_{c_i,c}),$$

where c_i is one of the neighboring cells from 8-neighborhood of the cell c

- The algorithm provides a cost map of the path distance from any free cell to the goal cell
- The path is then used following the gradient of the cell cost

Jarvis, R. (2004): Distance Transform Based Visibility Measures for Covert Path Planning in Known but Dynamic Environments

Distance Transform Path Planning

Algorithm 1: Distance Transform for Path Planning

```

for y := 0 to yMax do
  for x := 0 to xMax do
    if goal [x,y] then
      cell [x,y] := 0;
    else
      cell [x,y] := xMax * yMax; //initialization, e.g., pragmatically use longest distance as ∞ ;
  repeat
    for y := 1 to (yMax - 1) do
      for x := 1 to (xMax - 1) do
        if not blocked [x,y] then
          cell [x,y] := cost(x, y);
      for y := (yMax-1) downto 1 do
        for x := (xMax-1) downto 1 do
          if not blocked [x,y] then
            cell [x,y] := cost(x, y);
  until no change;
    
```

Distance Transform based Path Planning – Impl. 1/2

```

1 Grid& DT::compute(Grid& grid) const 35
2 { 36 for (int c = H - 2; c > 0; --c) {
3   static const double DIAGONAL = sqrt(2); 37   if (map[r][c] != FREESPACE) {
4   static const double ORTOGNAL = 1; 38     continue;
5   const int H = map.H; 39   } //obstacle detected
6   const int W = map.W; 40   double t[4];
7   assert(grid.H == H and grid.W == W, "size"); 41   t[1] = grid[r + 1][c] + ORTOGNAL;
8   bool anyChange = true; 42   t[0] = grid[r + 1][c + 1] + DIAGONAL;
9   int counter = 0; 43   t[3] = grid[r][c + 1] + ORTOGNAL;
10  while (anyChange) { 44   t[2] = grid[r + 1][c - 1] + DIAGONAL;
11  anyChange = false; 45   double pom = grid[r][c];
12  for (int r = 1; r < H - 1; ++r) { 46   bool s = false;
13  for (int c = 1; c < W - 1; ++c) { 47   for (int i = 0; i < 4; i++) {
14  if (map[r][c] != FREESPACE) { 48     if (pom > t[i]) {
15  continue; 49       pom = t[i];
16  } //obstacle detected 50     s = true;
17  double t[4]; 51   }
18  t[0] = grid[r - 1][c - 1] + DIAGONAL; 52   }
19  t[1] = grid[r - 1][c] + ORTOGNAL; 53   if (s) {
20  t[2] = grid[r - 1][c + 1] + DIAGONAL; 54     anyChange = true;
21  t[3] = grid[r][c - 1] + ORTOGNAL; 55     grid[r][c] = pom;
22  double pom = grid[r][c]; 56   }
23  for (int i = 0; i < 4; i++) { 57   }
24  if (pom > t[i]) { 58   }
25  pom = t[i]; 59   counter++;
26  anyChange = true; 60   } //end while any change
27  } 61   return grid;
28  } 62
29  if (anyChange) { 63
30  grid[r][c] = pom; 64
31  } 65
32  } 66
33  } 67
    
```


Distance Transform based Path Planning – Impl. 2/2

- The path is retrieved by following the minimal value towards the goal using `min8Point()`

```

1 Coord& min8Point(const Grid& grid, Coord& p) 22 CoordVector& DT::findPath(const Coord& start,
2 { 23   const Coord& goal, CoordVector& path)
3   double min = std::numeric_limits<double>::max(); 24   static const double DIAGONAL = sqrt(2);
4   const int H = grid.H; 25   static const double ORTOGNAL = 1;
5   const int W = grid.W; 26   const int H = map.H;
6   Coord& t; 27   const int W = map.W;
7   28   Grid grid(H, W, H*W); // H*W max grid value
8   for (int r = p.r - 1; r <= p.r + 1; r++) { 29   grid[goal.r][goal.c] = 0;
9   if (r < 0 or r >= H) { continue; } 30   compute(grid);
10  for (int c = p.c - 1; c <= p.c + 1; c++) { 31
11  if (c < 0 or c >= W) { continue; } 32   if (grid[start.r][start.c] >= H*W) {
12  if (min > grid[r][c]) { 33     WARN("Path has not been found");
13  min = grid[r][c]; 34   } else {
14  t.r = r; t.c = c; 35     Coord& pt = start;
15  } 36     while (pt.r != goal.r or pt.c != goal.c) {
16  } 37     path.push_back(pt);
17  } 38     min8Point(grid, pt);
18  p = t; 39   }
19  return p; 40   path.push_back(goal);
20  } 41   return path;
    
```

DT Example

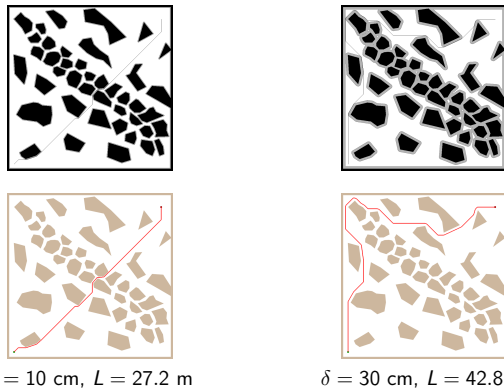

Graph Search Algorithms


- The grid can be considered as a graph and the path can be found using graph search algorithms
- The search algorithms working on a graph are of general use, e.g.
 - Breadth-first search (BSD)
 - Depth first search (DFS)
 - Dijkstra's algorithm,
 - A* algorithm and its variants
- There can be grid based speedups techniques, e.g.,
 - Jump Search Algorithm (JPS) and JPS+
- There are many search algorithm for on-line search, incremental search and with any-time and real-time properties, e.g.,
 - Lifelong Planning A* (LPA*)

Koenig, S., Likhachev, M. and Furcy, D. (2004): Lifelong Planning A*. AIJ.

 - E-Graphs – Experience graphs


Phillips, M. et al. (2012): E-Graphs: Bootstrapping Planning with Experience Graphs. RSS.

Examples of Graph/Grid Search Algorithms

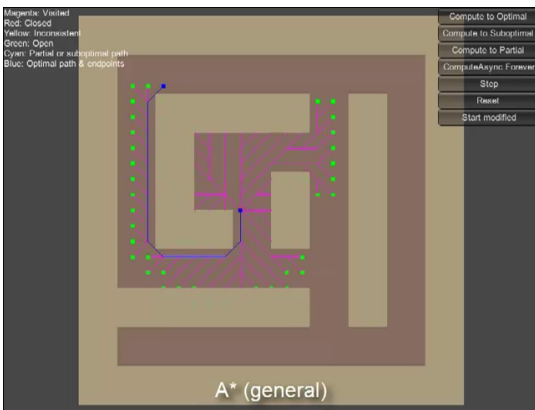


Dijkstra's Algorithm

- Dijkstra's algorithm determines paths as iterative update of the cost of the shortest path to the particular nodes

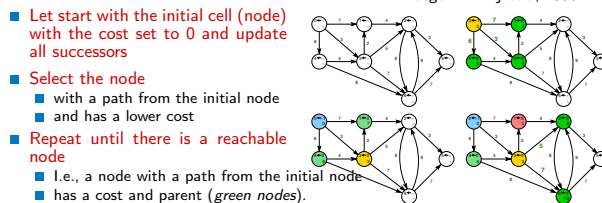

The cost of nodes can only decrease (edge cost is positive). Therefore, for a node with the currently lowest cost, there cannot be a shorter path from the initial node.

Example (cont.)

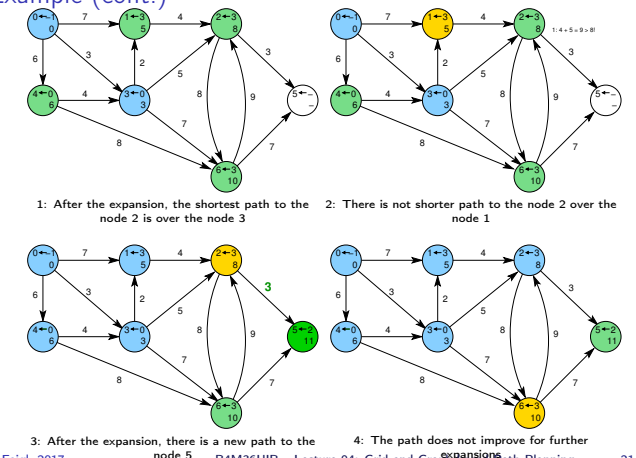

Dijkstra's Algorithm – Impl.

```

1  dijk->nodes[dij->start_node].cost = 0; // init
2  void *pq = pq_alloc(dij->num_nodes); // set priority queue
3  int cur_label;
4  pq_push(pq, dijk->start_node, 0);
5  while ( !pq_is_empty(pq) && pq_pop(pq, &cur_label) ) {
6  node_t *cur = &(dij->nodes[cur_label]); // remember the current node
7  for (int i = 0; i < cur->edge_count; ++i) { // all edges of cur
8  edge_t *edge = &(dij->graph->edges[cur->edge_start + i]);
9  node_t *to = &(dij->nodes[edge->to]);
10 const int cost = cur->cost + edge->cost;
11 if (to->cost == -1) { // node to has not been visited
12 to->cost = cost;
13 to->parent = cur_label;
14 pq_push(pq, edge->to, cost); // put node to the queue
15 } else if (cost < to->cost) { // node already in the queue
16 to->cost = cost; // test if the cost can be reduced
17 to->parent = cur_label; // update the parent node
18 pq_update(pq, edge->to, cost); // update the priority queue
19 }
20 } // loop for all edges of the cur node
21 } // priority queue empty
22 pq_free(pq); // release memory
    
```

A* Algorithm

- A* uses a user-defined *h*-values (heuristic) to focus the search
Peter Hart, Nils Nilsson, and Bertram Raphael, 1968
- Prefer expansion of the node *n* with the lowest value
 $f(n) = g(n) + h(n)$,
where *g*(*n*) is the cost (path length) from the start to *n* and *h*(*n*) is the estimated cost from *n* to the goal
- h*-values approximate the goal distance from particular nodes
- Admissibility condition** – heuristic always underestimate the remaining cost to reach the goal
 - Let $h^*(n)$ be the true cost of the optimal path from *n* to the goal
 - Then *h*(*n*) is **admissible** if for all *n*: $h(n) \leq h^*(n)$
 - E.g., Euclidean distance is admissible
 - A straight line will always be the shortest path
- Dijkstra's algorithm – $h(n) = 0$

A* Implementation Notes

- The most costly operations of A* are
 - Insert and lookup an element in the **closed list**
 - Insert element and get minimal element (according to *f*(*s*) value) from the **open list**
- The **closed list** can be efficiently implemented as a **hash set**
- The **open list** is usually implemented as a **priority queue**, e.g.,
 - Fibonacci heap, binomial heap, *k*-level bucket
 - binary heap** is usually sufficient ($O(\log n)$)
- Forward A*
 - Create a search tree and initiate it with the start location
 - Select generated but not yet expanded state *s* with the smallest *f*-value, $f(s) = g(s) + h(s)$
 - Stop if *s* is the goal
 - Expand the state *s*
 - Goto Step 2

Similar to Dijkstra's algorithm but it used *f*(*s*) with heuristic *h*(*s*) instead of pure *g*(*s*)

Dijkstra's vs A* vs Jump Point Search (JPS)



<https://www.youtube.com/watch?v=R0G4Ud081LY>

Jump Point Search Algorithm for Grid-based Path Planning

- Jump Point Search (JPS)** algorithm is based on a macro operator that identifies and selectively expands only certain nodes (**jump points**)
Harabor, D. and Grastien, A. (2011): Online Graph Pruning for Pathfinding on Grid Maps. AAAI.
- Natural neighbors after neighbor pruning with forced neighbors because of obstacle
- Intermediate nodes on a path connecting two jump points are never expanded
- No preprocessing and no memory overheads while it speeds up A*
<https://harablog.wordpress.com/2011/09/07/jump-point-search/>
- JPS+ – optimized preprocessed version of JPS with goal bounding
<https://github.com/SteveRabin/JPSplusWithGoalBounding>
<http://www.gdcvault.com/play/1022094/JPS-Over-100x-Faster-than>

Theta* – Any-Angle Path Planning Algorithm

- Any-angle path planning algorithms** simplify the path during the search
- Theta*** is an extension of A* with LineOfSight()
 - Nash, A., Daniel, K., Koenig, S. and Felner, A. (2007): Theta*: Any-Angle Path Planning on Grids. AAAI.

Algorithm 2: Theta* Any-Angle Planning

```


if LineOfSight(parent(s), s') then
    /* Path 2 – any-angle path */
    if g(parent(s)) + c(parent(s), s') < g(s') then
        parent(s) := parent(s);
        g(s') := g(parent(s)) + c(parent(s), s');
    else
        /* Path 1 – A* path */
        if g(s) + c(s, s') < g(s') then
            parent(s') := s;
            g(s') := g(s) + c(s, s');
            
```

<http://aigamedev.com/open/tutorials/theta-star-any-angle-paths/>

Theta* Any-Angle Path Planning Examples

- Example of found paths by the Theta* algorithm for the same problems as for the DT-based examples on Slide 16

Both algorithms implemented in C++



$\delta = 10$ cm, $L = 26.3$ m



$\delta = 30$ cm, $L = 40.3$ m

The same path planning problems solved by DT (without path smoothing) have $L_{\delta=10} = 27.2$ m and $L_{\delta=30} = 42.8$ m, while DT seems to be faster

- Lazy Theta*** – reduces the number of line-of-sight checks

Nash, A., Koenig, S. and Tovey, C. (2010): Lazy Theta*: Any-Angle Path Planning and Path Length Analysis in 3D. AAAI.

<http://aigamedev.com/open/tutorial/lazy-theta-star/>

A* Variants – Online Search

- The state space (map) may not be known exactly in advance
 - Environment can **dynamically** change
 - True travel costs are **experienced** during the path execution
- Repeated A* searches can be computationally demanding
- Incremental heuristic search**
 - Repeated planning of the path from the current state to the goal
 - Planning under the **free-space** assumption
 - Reuse** information from the previous searches (**closed list** entries):
 - Focused Dynamic A* (**D***) – *h** is based on **traversability**, it has been used, e.g., for the Mars rover "Opportunity"
Stentz, A. (1995): The Focussed D* Algorithm for Real-Time Replanning. IJCAI.
 - D* Lite** – similar to D*
- Real-Time Heuristic Search**
 - Repeated planning with limited **look-ahead** – suboptimal but fast
 - Learning Real-Time A* (**LRTA***)
Korf, E. (1990): Real-time heuristic search. JAI
 - Real-Time Adaptive A* (**RTAA***)
Koenig, S. and Likhachev, M. (2006): Real-time adaptive A*. AAMAS.

Real-Time Adaptive A* (RTAA*)

- Execute A* with limited **look-ahead**
- Learns better informed **heuristic** from the experience, initially *h*(*s*), e.g., Euclidean distance
- Look-ahead defines **trade-off** between optimality and computational cost
 - astar(lookahead)


```

while (s_curr ∉ GOAL) do
    astar(lookahead);
    if s' = FAILURE then
        return FAILURE;
    for all s ∈ CLOSED do
        H(s) := g(s') + h(s') - g(s);
    execute(plan); // perform one step
return SUCCESS;
    
```

s' is the last state expanded during the previous A* search

A* expansion as far as "lookahead" nodes and it terminates with the state *s'*

D* Lite – Demo

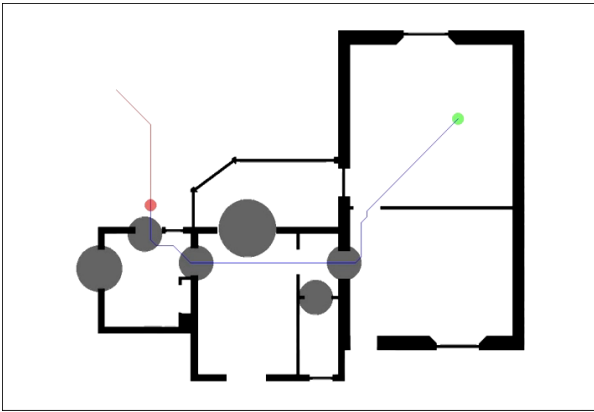

<https://www.youtube.com/watch?v=X5a149nSE9s>

D* Lite Algorithm

```

Main – repeat until the robot reaches the goal (or  $g(s_{start}) = \infty$  there is no path)
Initialize();
ComputeShortestPath();
while ( $s_{start} \neq s_{goal}$ ) do
     $s_{start} = \text{argmin}_{s' \in \text{Succ}(s_{start})} (c(s_{start}, s') + g(s'))$ ;
Move to  $s_{start}$ ;
Scan the graph for changed edge costs;
if any edge cost changed perform then
    foreach directed edges  $(u, v)$  with changed edge costs do
        Update the edge cost  $c(u, v)$ ;
        UpdateVertex( $u$ );
    foreach  $s \in U$  do
        U.Update( $s$ , CalculateKey( $s$ ));
    ComputeShortestPath();

Procedure Initialize
U = 0;
foreach  $s \in S$  do
     $rhs(s) := g(s) := \infty$ ;
 $rhs(s_{goal}) := 0$ ;
U.Insert( $s_{goal}$ , CalculateKey( $s_{goal}$ ));
    
```

D* Lite – Example Planning (1)

3,0	3,1	3,2	3,3	3,4
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
2,0	2,1	2,2	2,3	2,4 start
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
1,0	1,1	1,2	1,3	1,4
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
0,0 goal	0,1	0,2	0,3	0,4
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: 0$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$

Legend
 Free node (white), Obstacle node (brown), On open list (green), Active node (red)

Initialization

- Set $rhs = 0$ for the goal
- Set $rhs = g = \infty$ for all other nodes

D* Lite Overview

- It is similar to D*, but it is based on **Lifelong Planning A*** (Koenig, S. and Likhachev, M. (2002): D* Lite. AAAI.)
- It searches from the goal node to the start node, i.e., g -values estimate the goal distance
- Store pending nodes in a priority queue
- Process nodes in order of increasing objective function value
- Incrementally repair solution paths when changes occur
- Maintains two estimates of costs per node
 - g – the objective function value – based on what we know
 - rhs – one-step lookahead of the objective function value – based on what we know
- Consistency**
 - Consistent – $g = rhs$
 - Inconsistent – $g \neq rhs$
- Inconsistent nodes are stored in the priority queue (open list) for processing

D* Lite Algorithm – ComputeShortestPath()

```

Procedure ComputeShortestPath
while U.TopKey() < CalculateKey( $s_{start}$ ) OR  $rhs(s_{start}) \neq g(s_{start})$  do
     $u := U.Pop()$ ;
    if  $g(u) > rhs(u)$  then
         $g(u) := rhs(u)$ ;
        foreach  $s \in Pred(u)$  do UpdateVertex( $s$ );
    else
         $g(u) := \infty$ ;
        foreach  $s \in Pred(u) \cup \{u\}$  do UpdateVertex( $s$ );

Procedure UpdateVertex
if  $u \neq s_{goal}$  then  $rhs(u) := \min_{s' \in Succ(u)} (c(u, s') + g(s'))$ ;
if  $u \in U$  then U.Remove( $u$ );
if  $g(u) \neq rhs(u)$  then U.Insert( $u$ , CalculateKey( $u$ ));

Procedure CalculateKey
return  $[\min(g(s), rhs(s)) + h(s_{start}, s); \min(g(s), rhs(s))]$ 
    
```

D* Lite – Example Planning (2)

3,0	3,1	3,2	3,3	3,4
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
2,0	2,1	2,2	2,3	2,4 start
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
1,0	1,1	1,2	1,3	1,4
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
0,0 goal	0,1	0,2	0,3	0,4
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: 0$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$

Legend
 Free node (white), Obstacle node (brown), On open list (green), Active node (red)

Initialization

- Put the goal to the open list
- It is inconsistent

D* Lite: Cost Estimates

- rhs of the node u is computed based on g of its successors in the graph and the transition costs of the edge to those successors


$$rhs(u) = \min_{s' \in Succ(u)} (g(s') + c(u, s'))$$

- The key/priority of a node s on the open list is the minimum of $g(s)$ and $rhs(s)$ plus a focusing heuristic h

$$[\min(g(s), rhs(s)) + h(s_{start}, s); \min(g(s), rhs(s))]$$

- The first term is used as the primary key
- The second term is used as the secondary key for tie-breaking

D* Lite – Example

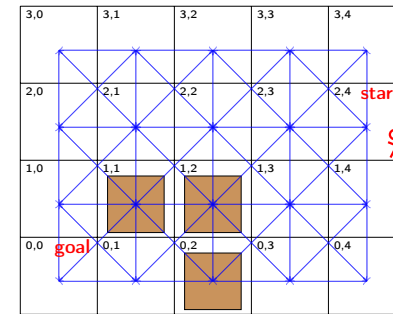

Legend
 Free node (white), Obstacle node (brown), On open list (green), Active node (red)

- A grid map of the environment (what is actually known)
- 8-connected graph superimposed on the grid (bidirectional)
- Focusing heuristic is not used ($h = 0$)

- Transition costs**
- Free space – Free space: 1.0 and 1.4 (for diagonal edge)
 - From/to obstacle: ∞

D* Lite – Example Planning (3)


3,0	3,1	3,2	3,3	3,4
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
2,0	2,1	2,2	2,3	2,4 start
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
1,0	1,1	1,2	1,3	1,4
$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$
0,0 goal	0,1	0,2	0,3	0,4
$g: 0$	$g: \infty$	$g: \infty$	$g: \infty$	$g: \infty$
$rhs: 0$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$	$rhs: \infty$

Legend
 Free node (white), Obstacle node (brown), On open list (green), Active node (red)


ComputeShortestPath

- Pop the minimum element from the open list (goal)
- It is over-consistent ($g > rhs$), therefore set $g = rhs$

D* Lite – Example Planning (4)

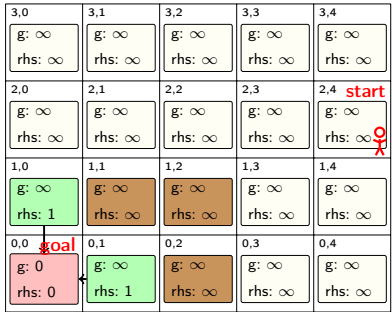

Legend




ComputeShortestPath

- Expand popped node (UpdateVertex() on all its predecessors)
- This computes the rhs values for the predecessors
- Nodes that become inconsistent are added to the open list

Small black arrows denote the node used for computing the rhs value, i.e., using the respective transition cost

- The rhs value of (1,1) is ∞ because the transition to obstacle has cost ∞

D* Lite – Example Planning (5)

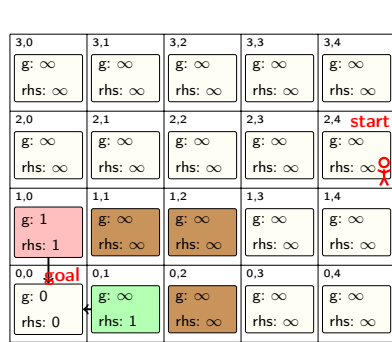


Legend



ComputeShortestPath

- Pop the minimum element from the open list (1,0)
- It is over-consistent ($g > rhs$) set $g = rhs$

D* Lite – Example Planning (6)

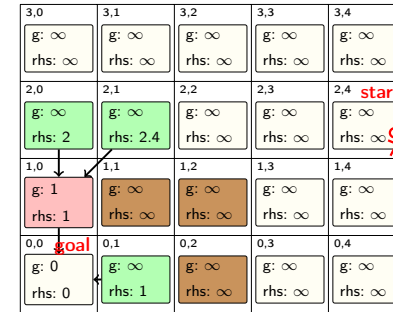

Legend




ComputeShortestPath

- Expand the popped node (UpdateVertex() on all predecessors in the graph)
- Compute rhs values of the predecessors accordingly
- Put them to the open list if they become inconsistent

- The rhs value of (0,0), (1,1) does not change
- They do not become inconsistent and thus they are not put on the open list

D* Lite – Example Planning (7)

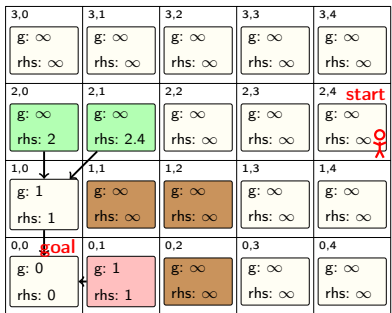


Legend



ComputeShortestPath

- Pop the minimum element from the open list (0,1)
- It is over-consistent ($g > rhs$) and thus set $g = rhs$
- Expand the popped element, e.g., call UpdateVertex()

D* Lite – Example Planning (8)

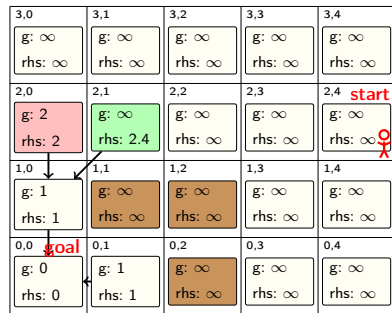


Legend




ComputeShortestPath

- Pop the minimum element from the open list (2,0)
- It is over-consistent ($g > rhs$) and thus set $g = rhs$

D* Lite – Example Planning (9)

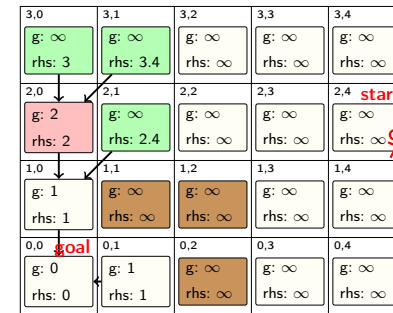


Legend



ComputeShortestPath

- Expand the popped element and put the predecessors that become inconsistent onto the open list

D* Lite – Example Planning (10)

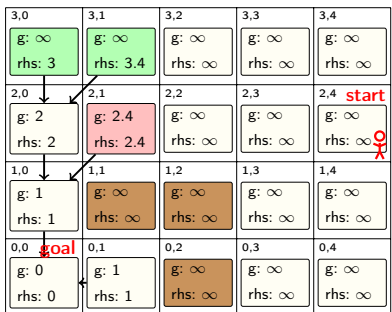


Legend




ComputeShortestPath

- Pop the minimum element from the open list (2,1)
- It is over-consistent ($g > rhs$) and thus set $g = rhs$

D* Lite – Example Planning (11)

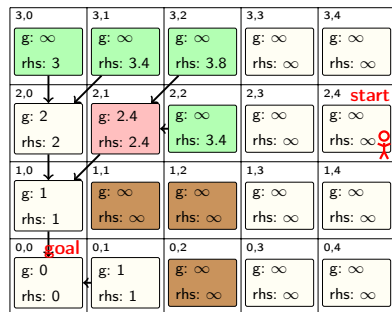


Legend




ComputeShortestPath

- Expand the popped element and put the predecessors that become inconsistent onto the open list

D* Lite – Example Planning (12)

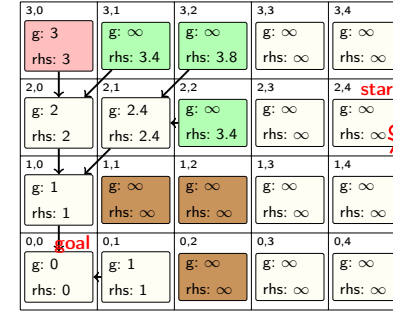


Legend



ComputeShortestPath

- Pop the minimum element from the open list (3,0)
- It is over-consistent ($g > rhs$) and thus set $g = rhs$
- Expand the popped element and put the predecessors that become inconsistent onto the open list
- In this cases, none of the predecessors become inconsistent

D* Lite – Example Planning (13)

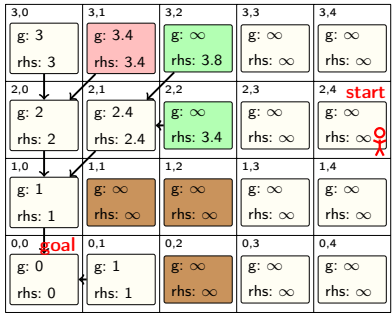


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Pop the minimum element from the open list (3,0)
 - It is over-consistent ($g > rhs$) and thus set $g = rhs$
 - Expand the popped element and put the predecessors that become inconsistent onto the open list
 - In this cases, none of the predecessors become inconsistent

D* Lite – Example Planning (14)

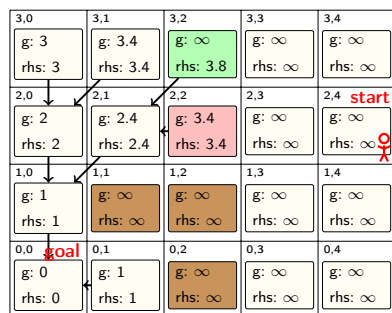


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Pop the minimum element from the open list (2,2)
 - It is over-consistent ($g > rhs$) and thus set $g = rhs$

D* Lite – Example Planning (15)

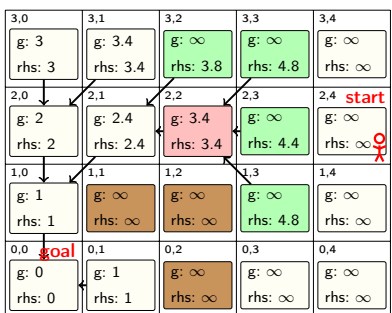


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Expand the popped element and put the predecessors that become inconsistent onto the open list, i.e., (3,2), (3,3), (2,3)

D* Lite – Example Planning (16)

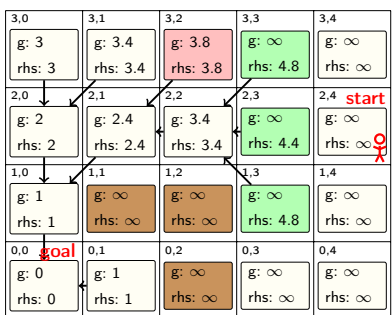


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Pop the minimum element from the open list (3,2)
 - It is over-consistent ($g > rhs$) and thus set $g = rhs$
 - Expand the popped element and put the predecessors that become inconsistent onto the open list
 - In this cases, none of the predecessors become inconsistent

D* Lite – Example Planning (17)

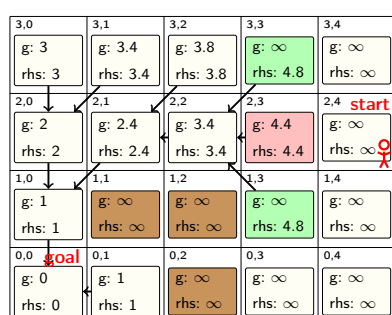


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Pop the minimum element from the open list (2,3)
 - It is over-consistent ($g > rhs$) and thus set $g = rhs$

D* Lite – Example Planning (18)

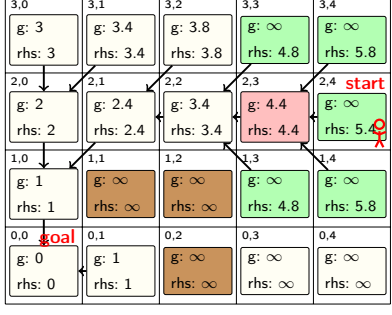


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Expand the popped element and put the predecessors that become inconsistent onto the open list, i.e., (3,4), (2,4), (1,4)
 - The start node is on the open list
 - However, the search does not finish at this stage
 - There are still inconsistent nodes (on the open list) with a lower value of rhs

D* Lite – Example Planning (19)

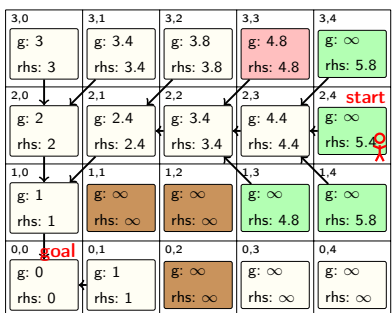


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Pop the minimum element from the open list (3,2)
 - It is over-consistent ($g > rhs$) and thus set $g = rhs$
 - Expand the popped element and put the predecessors that become inconsistent onto the open list
 - In this cases, none of the predecessors become inconsistent

D* Lite – Example Planning (20)

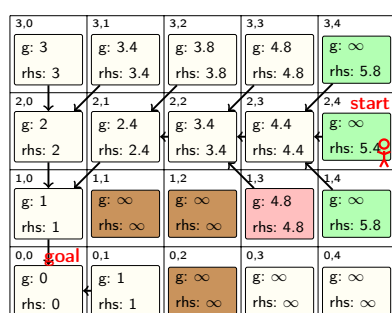


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Pop the minimum element from the open list (1,3)
 - It is over-consistent ($g > rhs$) and thus set $g = rhs$

D* Lite – Example Planning (21)

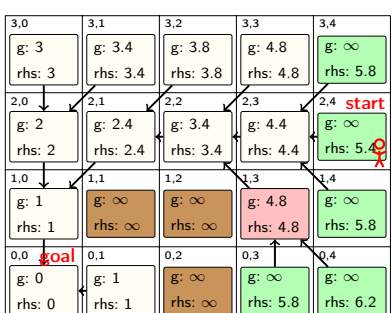


Legend

- Free node
- Obstacle node
- On open list
- Active node

- ComputeShortestPath**
- Expand the popped element and put the predecessors that become inconsistent onto the open list, i.e., (0,3) and (0,4)

D* Lite – Example Planning (22)

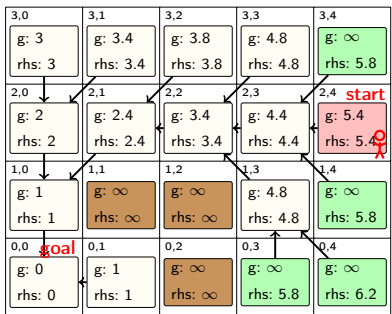

Legend


- Free node
- Obstacle node
- On open list
- Active node

ComputeShortestPath

- Pop the minimum element from the open list (2,4)
- It is over-consistent ($g > rhs$) and thus set $g = rhs$
- Expand the popped element and put the predecessors that become inconsistent (none in this case) onto the open list

- The start node becomes consistent and the top key on the open list is not less than the key of the start node
- An optimal path is found and the loop of the ComputeShortestPath is broken

D* Lite – Example Planning (23)

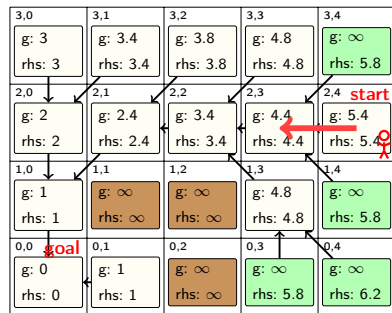


Legend

- Free node
- Obstacle node
- On open list
- Active node

- Follow the gradient of g values from the start node

D* Lite – Example Planning (24)

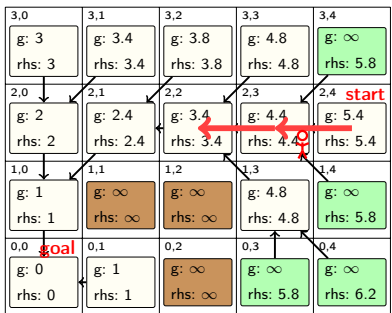


Legend

- Free node
- Obstacle node
- On open list
- Active node

- Follow the gradient of g values from the start node

D* Lite – Example Planning (25)

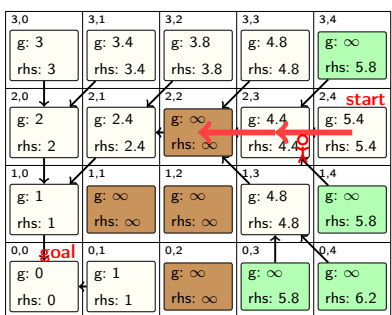


Legend

- Free node
- Obstacle node
- On open list
- Active node

- A new obstacle is detected during the movement from (2,3) to (2,2)
- Replanning is needed!

D* Lite – Example Planning (25 update)

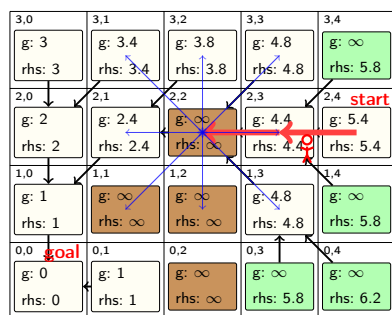


Legend

- Free node
- Obstacle node
- On open list
- Active node

- All directed edges with changed edge, we need to call the UpdateVertex()
- All edges into and out of (2,2) have to be considered

D* Lite – Example Planning (26 update 1/2)

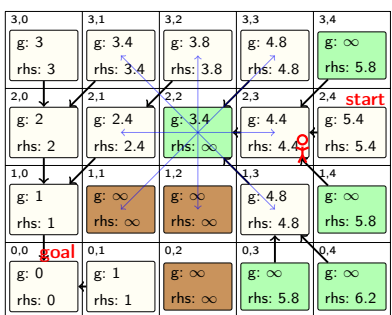


Legend

- Free node
- Obstacle node
- On open list
- Active node

Update Vertex

- Outgoing edges from (2,2)
- Call UpdateVertex() on (2,2)
- The transition costs are now infinity because of obstacle
- Therefore the $rhs = \infty$ and (2,2) becomes inconsistent and it is put on the open list

D* Lite – Example Planning (26 update 2/2)

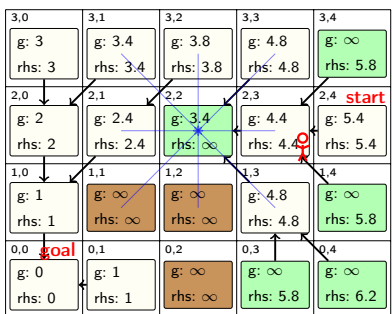


Legend

- Free node
- Obstacle node
- On open list
- Active node

Update Vertex

- Incoming edges to (2,2)
- Call UpdateVertex() on the neighbors (2,2)
- The transition cost is infinity, and therefore, the rhs value previously computed using (2,2) is changed

D* Lite – Example Planning (27)

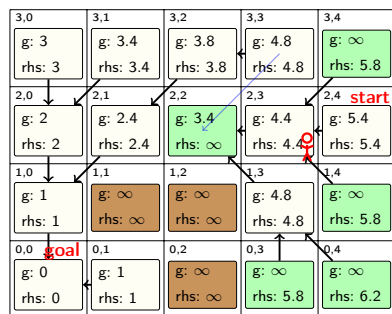


Legend

- Free node
- Obstacle node
- On open list
- Active node

Update Vertex

- The neighbor of (2,2) is (3,3)
- The minimum possible rhs value of (3,3) is 4.8 but it is based on the g value of (3,2) and not (2,2), which is the detected obstacle
- The node (3,3) is still consistent and thus it is not put on the open list

D* Lite – Example Planning (28)

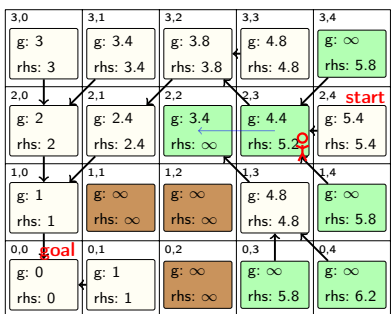


Legend

- Free node
- Obstacle node
- On open list
- Active node

Update Vertex

- (2,3) is also a neighbor of (2,2)
- The minimum possible rhs value of (2,3) is 5.2 because of (2,2) is obstacle (using (3,2) with $3.8 + 1.4$)
- The rhs value of (2,3) is different than g thus (2,3) is put on the open list

D* Lite – Example Planning (29)

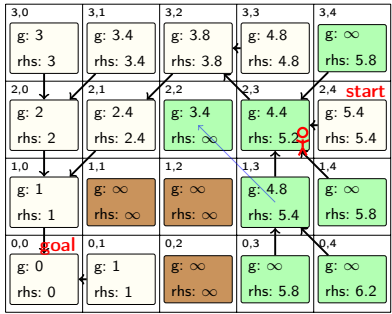


Legend

- Free node
- Obstacle node
- On open list
- Active node

Update Vertex

- Another neighbor of (2,2) is (1,3)
- The minimum possible rhs value of (1,3) is 5.4 computed based on g of (2,3) with $4.4 + 1 = 5.4$
- The rhs value is always computed using the g values of its successors

D* Lite – Example Planning (29 update)

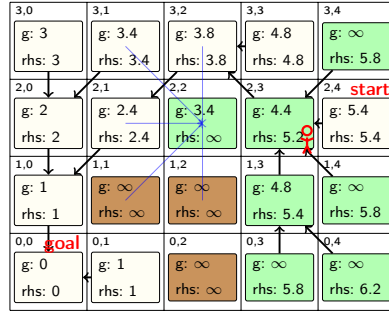

Legend


- Free node
- Obstacle node
- On open list
- Active node

Update Vertex

- None of the other neighbor of (2,2) end up being inconsistent
- We go back to calling ComputeShortestPath() until an optimal path is determined

- The node corresponding to the robot's current position is inconsistent and its key is greater than the minimum key on the open list
- Thus, the optimal path is not found yet

D* Lite – Example Planning (30)

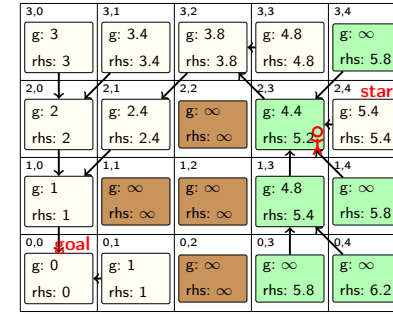

Legend


- Free node
- Obstacle node
- On open list
- Active node

ComputeShortestPath

- Pop the minimum element from the open list (2,2), which is obstacle
- It is under-consistent ($g < rhs$), therefore set $g = \infty$
- Expand the popped element and put the predecessors that become inconsistent (none in this case) onto the open list

- Because (2,2) was under-consistent (when popped), UpdateVertex() has to be called on it
- However, it has no effect as its rhs value is up to date and consistent

D* Lite – Example Planning (31)

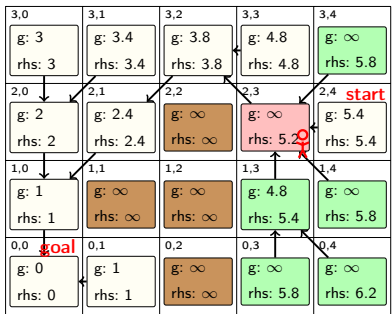


Legend

- Free node
- Obstacle node
- On open list
- Active node

ComputeShortestPath

- Pop the minimum element from the open list (2,3)
- It is under-consistent ($g < rhs$), therefore set $g = \infty$

D* Lite – Example Planning (32)

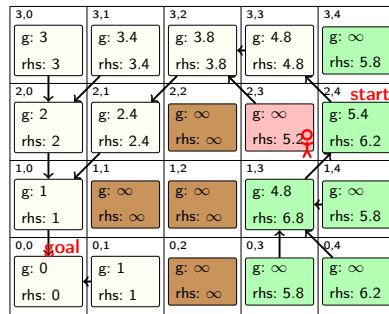


Legend

- Free node
- Obstacle node
- On open list
- Active node

ComputeShortestPath

- Expand the popped element and update the predecessors
- (2,4) becomes inconsistent
- (1,3) gets updated and still inconsistent
- The rhs value (1,4) does not change, but it is now computed from the g value of (1,3)

D* Lite – Example Planning (33)

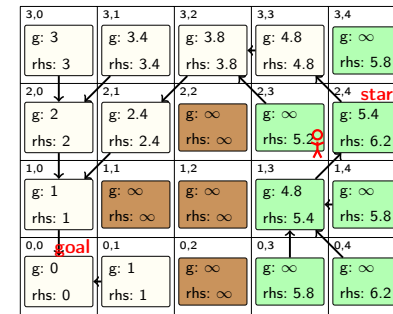


Legend

- Free node
- Obstacle node
- On open list
- Active node

ComputeShortestPath

- Because (2,3) was under-consistent (when popped), call UpdateVertex() on it is needed
- As it is still inconsistent it is put back onto the open list

D* Lite – Example Planning (34)

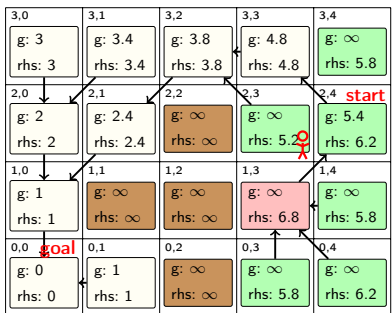


Legend

- Free node
- Obstacle node
- On open list
- Active node

ComputeShortestPath

- Pop the minimum element from the open list (1,3)
- It is under-consistent ($g < rhs$), therefore set $g = \infty$

D* Lite – Example Planning (35)

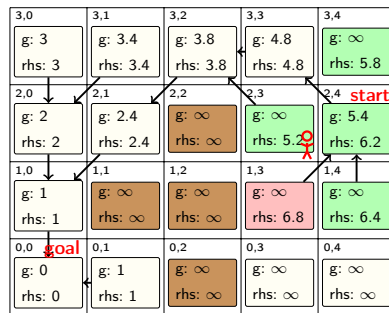


Legend

- Free node
- Obstacle node
- On open list
- Active node

ComputeShortestPath

- Expand the popped element and update the predecessors
- (1,4) gets updated and still inconsistent
- (0,3) and (0,4) get updated and now consistent (both g and rhs are ∞)

D* Lite – Example Planning (36)

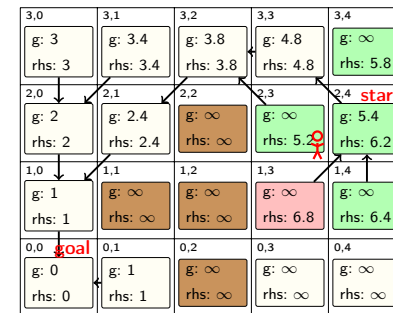


Legend

- Free node
- Obstacle node
- On open list
- Active node

ComputeShortestPath

- Because (1,3) was under-consistent (when popped), call UpdateVertex() on it is needed
- As it is still inconsistent it is put back onto the open list

D* Lite – Example Planning (37)

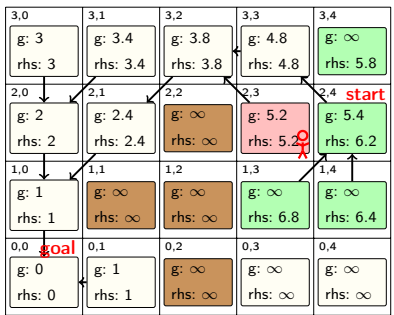

Legend
 Free node Obstacle node
 On open list Active node


ComputeShortestPath

- Pop the minimum element from the open list (2,3)
- It is over-consistent ($g > rhs$), therefore set $g = rhs$

D* Lite – Comments


- D* Lite works with real valued costs, not only with binary costs (free/obstacle)
- The search can be focused with an admissible heuristic that would be added to the g and rhs values
- The final version of D* Lite includes further optimization (not shown in the example)
 - Updating the rhs value without considering all successors every time
 - Re-focusing the search as the robot moves without reordering the entire open list

Nullcline Configurations and Steady States




- Nullclines intersections represent
 - Stable States (SSs)
 - Unstable States
- Bistable regime
 The system (concentration levels of (u, v) for each grid cell) tends to be in SSs.

- We can modulate relative stability of both SS
 "preference" of SS^- over SS^+
- System moves from SS^- to SS^+ ,
 if a small perturbation is introduced.
- The SSs are separated by a mobile frontier
 a kind of traveling frontwave (autowaves)



D* Lite – Example Planning (38)

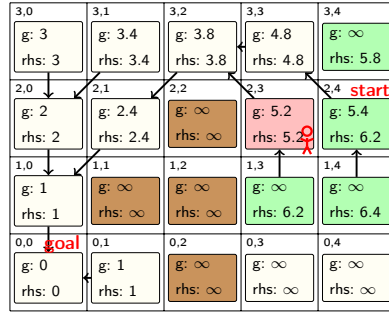

Legend
 Free node Obstacle node
 On open list Active node

ComputeShortestPath

- Expand the popped element and update the predecessors
- (1,3) gets updated and still inconsistent
- The node (2,3) corresponding to the robot's position is consistent
- Besides, top of the key on the open list is not less than the key of (2,3)
- The optimal path has been found and we can break out of the loop

Reaction-Diffusion Processes Background

- Reaction-Diffusion (RD) models – dynamical systems capable to reproduce the autowaves
- Autowaves - a class of nonlinear waves that propagate through an active media
 At the expense of the energy stored in the medium, e.g., grass combustion.
- RD model describes spatio-temporal evolution of two state variables $u = u(\vec{x}, t)$ and $v = v(\vec{x}, t)$ in space \vec{x} and time t

$$\dot{u} = f(u, v) + D_u \Delta u$$

$$\dot{v} = g(u, v) + D_v \Delta v$$
 where Δ is the Laplacian.


This RD-based path planning is informative, just for curiosity

RD-based Path Planning – Computational Model

- Finite difference method on a Cartesian grid with Dirichlet boundary conditions (FTCS) discretization \rightarrow grid based computation \rightarrow grid map
- External forcing – introducing additional information i.e., constraining concentration levels to some specific values
- Two-phase evolution of the underlying RD model
 - Propagation phase**
 - Free space is set to SS^- and the start location SS^+
 - Parallel propagation of the frontwave with non-annihilation property
 - Terminate when the frontwave reaches the goal
 - Contraction phase**
 - Different nullclines configuration
 - Start and goal positions are forced towards SS^+
 - SS^- shrinks until only the path linking the forced points remains



D* Lite – Example Planning (39)

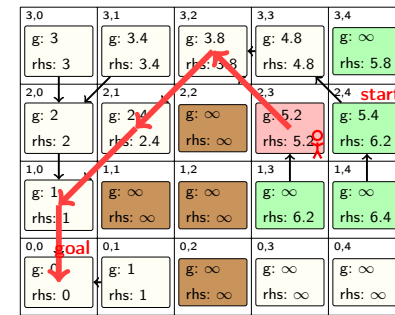

Legend
 Free node Obstacle node
 On open list Active node

- Follow the gradient of g values from the robot's current position (node)

Reaction-Diffusion Background

- FitzHugh-Nagumo (FHN) model
 FitzHugh R, Biophysical Journal (1961)


$$\dot{u} = \varepsilon(u - u^3 - v + \phi) + D_u \Delta u$$

$$\dot{v} = (u - \alpha v + \beta) + D_v \Delta v$$
 where $\alpha, \beta, \varepsilon$, and ϕ are parameters of the model.
- Dynamics of RD system is determined by the associated nullcline configurations for $\dot{u}=0$ and $\dot{v}=0$ in the absence of diffusion, i.e.,

$$\varepsilon(u - u^3 - v + \phi) = 0,$$


$$(u - \alpha v + \beta) = 0,$$
 which have associated geometrical shapes

Example of Found Paths

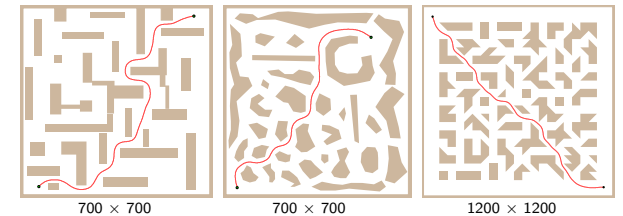

- The path clearance maybe adjusted by the wavelength and size of the computational grid.
 Control of the path distance from the obstacles (path safety)

Comparison with Standard Approaches

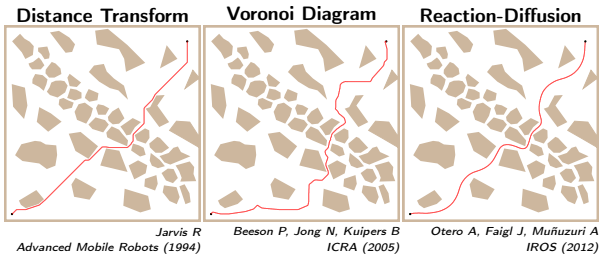

- RD-based approach provides competitive paths regarding path length and clearance, while they seem to be smooth

Topics Discussed

- Front-Wave propagation and path simplification
- Distance Transform based planning
- Graph based planning methods: Dijkstra's, A*, JPS, Theta*
- D* Lite
- Reaction-Diffusion based planning (*informative*)
- Next: Randomized Sampling-based Motion Planning Methods**

Robustness to Noisy Data



Vázquez-Otero, A., Faigl, J., Duro, N. and Dormido, R. (2014): Reaction-Diffusion based Computational Model for Autonomous Mobile Robot Exploration of Unknown Environments. International Journal of Unconventional Computing (IJUC).

Summary of the Lecture