

## Some buzzwords and acronyms for today

- Software architecture
- Design pattern
- Separation of concerns
- Single responsibility principle
- Keep it simple, stupid (KISS)
- Don't repeat yourself (DRY)
- Don't talk to strangers (Demeter's law)
- Inversion of Control (IoC)
- Dependency injection (DI)
- Data Access Object (DAO)
- Model View Controller (MVC)
- Hollywood principle
- Encapsulation
- High cohesion, loose coupling

## 1 Software Architecture

### What is a software architecture?

The software architecture of a program or computing system is the structure or structures of the system, which comprise software elements, the externally visible properties of those elements, and the relationships among them. Architecture is concerned with the public side of interfaces; private details of elements—details having to do solely with internal implementation— are not architectural.

- Bass, Clements, and Kazman *Software Architecture in Practice (2nd edition)*

## Architecture

Changes slowly

Influences the whole system

*Architectural styles*

## Component design

Rapid change through refactoring

Specific for the component

*Design patterns*

## Software architecture

Architecture describes the overall structure of a software system. Good architecture enables smooth evolution of the system.

It must take into account things like

- Deployment environment,
- Platform and technology specifics,
- Expected system scope.

## Architecture design principles

Standard design principles also apply to system-wide architecture, i.e.

- *Separation of concerns,*
- *Single responsibility principle,*
- *Law of Demeter,*
- *Don't repeat yourself.*

**Before you design the system architecture, you need to**

- Determine application type,
- Determine deployment strategy and environment,
- Determine technologies to use,
- Determine quality attributes,
- Determine crosscutting concerns.

## Architecture example

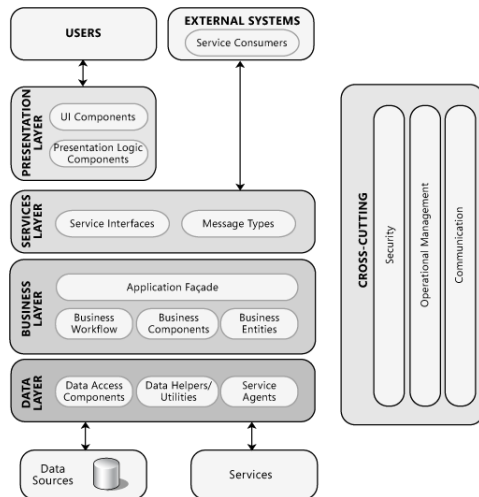


Figure 1: System architecture example. Source: <https://msdn.microsoft.com/en-us/library/ee658124.aspx>

## System architecture

- Usually consists of multiple architectural styles,
- Should be well understood by the team,
- Should be documented (diagrams, pictures, notes),
- Should clearly expose system structure, while hiding implementation details,
  - E.g. show where stuff happens, but not how,
- Address all user scenarios (eventually),
- Should handle both functional and non-functional requirements,
- Evolves as the software grows.

## 2 Architectural Styles

### Architectural styles

- There exist plenty of architectural styles,
- They are usually combined in an application,
- Different styles are suitable for different scenarios,
- Various ways of architectural style classification.

## **Architectural styles - Communication**

### **Service-Oriented Architecture**

- Distributed applications provide services for each other,
- Using standard protocols and data formats (REST – HTTP and JSON/XML),
- Loose coupling, easy implementation switch,
- *Microservices*.

### **Message Bus**

- Central message queue handles message distribution,
- Asynchronous messages between clients,
- Loose coupling, scalability,
- *Enterprise Service Bus* – provided by Oracle, IBM etc.

## **Architectural styles - Deployment**

### **Client/Server**

- Client sends requests, server responds,
- Web applications use this pattern,
- Server – possible single point of failure and scalability issue.

### **N(3)-tier**

- Independent tiers providing functionality,
- Easier scaling,
- E.g. load balancing, company firewall.

## **Architectural styles - Domain**

### **Domain-driven Design**

- Business components represent domain entities,
- Suitable for modelling complex domains,
- Common language and model for developers and domain experts.

## Architectural styles - Structure

### Object-oriented

- Objects consist of both behaviour and data,
- Natural representation of real world,
- Encapsulation of the implementation details.

### Layered

More on layers later...

## Architectural styles - Structure II

### Component-based

- System decomposed into logical or functional components,
- Components provide public interfaces,
- Supports separation of concerns and encapsulation,
- Components can be managed by architecture provider,
  - *Dependency injection* and *Service locator* used to managed dependencies,
- Components can be distributed,
- Higher level than OOP.

## 2.1 Layered Architecture

### Layered architecture

- Layers of related functionality,
- Typical for web applications,
- Behaviour encapsulation, clear separation of concerns, high cohesion, loose coupling,
- Testability.

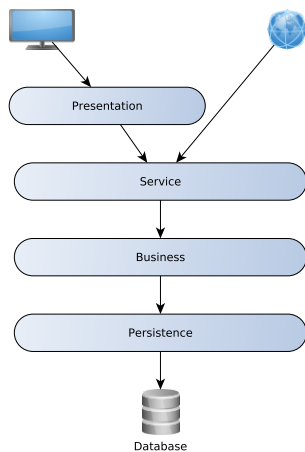


Figure 2: Layered system architecture.

### Layered architecture II

- In contrast to *N-tier architecture*, the layers are usually in one process (e.g. application server),
- Each component communicates only with other components within the same layer or in the layer(s) below it,
  - Strict interaction** Layer communicates only with the layer directly below,
  - Loose interaction** Layer can communicate also with layers deeper below,
- Crosscutting concerns stem across all layers (e.g. security, logging).

## 3 Design Patterns

### Design patterns

Design patterns represent generally applicable solutions to commonly occurring problems.

Patterns mostly consist of (this was cemented by the GoF):

**Pattern name** Simple identification useful in communication,

**Problem** Description of the problem and its *context*,

**Solution** Solution of the problem (good practice),

**Consequences** Possible trade-offs of applying the pattern.

## 3.1 GoF Design Patterns

### Gang of Four Patterns

Based on the book *Design Patterns: Elements of Reusable Object-Oriented Software*.

- Bible of design patterns,
- Patterns applicable to all kinds of object-oriented software.

### Creational Patterns

**Abstract Factory** Interface for creating families of related objects,

**Builder** Instance construction process in separate object,

**Factory Method** Subclasses decide which class to instantiate,

**Prototype** Build instances based on prototype,

**Singleton** Only one instance of the class.

### Structural Patterns

**Adapter** Convert interface of one class to a different interface using an adapter (e.g. for legacy classes),

**Bridge** Decouple abstraction from implementation,

**Composite** Build tree-like structure of objects,

**Decorator** Add or alter behaviour of another object by wrapping it in a class with the same interface (e.g. Java streams),

**Facade** Provide a unified interface to a set of interfaces,

**Flyweight** Use sharing to support a large number of fine-grained objects,

**Proxy** Provide a placeholder for another object to control access to it.

### Behavioral Patterns

**Chain of Responsibility** Multiple objects in a chain can handle a request,

**Command** Encapsulate a request in an object (e.g. *undo* functionality),

**Interpreter** Interpreter for a language and its grammar,

**Iterator** Provide a way to access elements of an aggregate object (e.g. Java collections),

**Mediator** An object that encapsulates how a set of objects interact,

**Memento** Capture object's state so that it can be restored to this state later,

## Behavioral Patterns II

**Observer** Decoupled notification of changes of object's state,

**State** Allows object's behaviour to change based on its internal state,

**Strategy** A family of algorithms, which can be interchanged independently of the client,

**Template method** Define a skeleton of an algorithm and let subclasses fill in the details,

**Visitor** Represent an operation to be performed on the elements of an object structure.

## 3.2 Enterprise Design Patterns

### Enterprise Design Patterns

Mostly based on the book *Patterns of Enterprise Application Architecture*.

- Design patterns used especially in enterprise software,
- Similarly to GoF design patterns, they originate from best practice solutions to common problems, but this time in enterprise application development.

### PEAA

#### Data Transfer Object (DTO)

- Object that carries data between processes in order to reduce the number of calls,
- Useful e.g. when JPA entities are not the best way of carrying data between REST interfaces.

#### Lazy Load

- Object does not contain all of its data initially, but knows how to load it,
- Useful for objects holding large amounts of data (e.g. binary data),
- Often overused as a way of premature optimization.

### PEAA II

#### Model View Controller (MVC)

- Splits user interface interaction into three distinct roles,
- Decouples UI rendering from data and UI logic,
- UI implementation interchangeable.



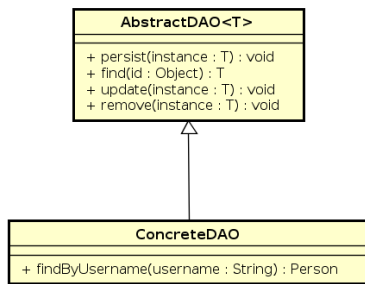


Figure 3: Common Data access object hierarchy.

### Unit Of Work

- Maintains objects affected by a business transaction and coordinates the writing out of changes and the resolution of concurrency problems,
- Common in JPA implementations (e.g. Eclipselink).

### 3.3 Other Useful Patterns

#### Data Access Object (DAO)

- Data access object encapsulates all access to the data source,
- Abstract interface hides all the details of data source access (data source can be a RDBMS, an external service, a linked data repository).

#### Inversion of Control (IoC)

- Most common when working with frameworks,
- The framework takes control of what and when gets instantiated and called,
- The framework embodies some abstract design and we provide behaviour in various places,
- Especially important in applications which react to some client’s actions,
  - Be it a different application,
  - or a client using your application’s UI,
- aka *The Hollywood Principle* – “Don’t call us. We’ll call you.”

```

@Service
public class TeacherService {
    @Autowired
    private TeacherDao teacherDao;

    public List<Teacher> findAll() { return teacherDao.findAll(); }

    public boolean exists(String firstName, String lastName) {
        return teacherDao.findByName(firstName, lastName) != null;
    }

    public void persist(Teacher teacher) {
        teacherDao.persist(teacher);
    }
}

public interface TeacherDao {
    List<Teacher> findAll();
    Teacher findByName(String firstName, String lastName);
    void persist(Teacher teacher);
}

```

## Dependency Injection

- An assembler takes care of populating a field in a class with an appropriate implementation for the target interface,
- Enables the application to use loosely coupled components with interchangeable implementations.

## 4 Spring Web Application Architecture

### Spring web application architecture

- Typically layered,
  - Usually three layers,
- Relies on DI and IoC provided by the Spring container,
- Various possibilities for the top and bottom layers:
  - Spring MVC, REST services, SOAP services for the web layer,
  - Spring JPA, Spring JDBC,
- Integrated support for security.

### Spring application layers

```

@Repository
public class JpaTeacherDao implements TeacherDao {
    private static final Logger LOG = LoggerFactory.getLogger(JpaTeacherDao.class);

    @PersistenceContext
    private EntityManager em;

    @Transactional(readOnly = true)
    public List<Teacher> findAll() { return em.createNamedQuery("Teacher.findAll", Teacher.class).getResultList(); }

    @Transactional(readOnly = true)
    public Teacher findByName(String firstName, String lastName) {...}

    @Transactional
    public void persist(Teacher teacher) {...}
}

```

```

@Component
public class RemoteTeacherDao implements TeacherDao {
    @Override
    public List<Teacher> findAll() {...}

    @Override
    public Teacher findByName(String firstName, String lastName) {...}

    @Override
    public void persist(Teacher teacher) {...}
}

```

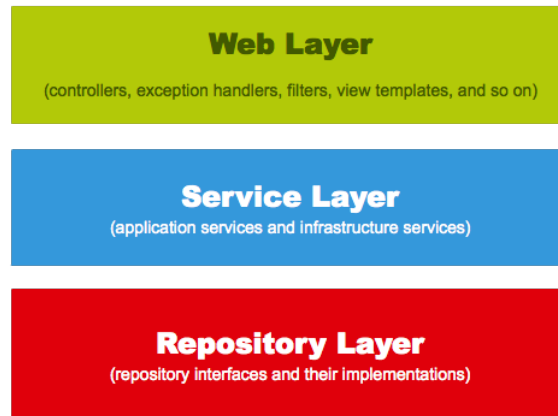


Figure 4: Spring web application architecture. Source: <https://www.petrikainulainen.net/wp-content/uploads/spring-web-application-layers.png>

## 5 Conclusions

### Conclusions

- Application design **does** matter,
- Architecture consists of multiple architectural styles,
- Design patterns are more fine grained than architectural styles,
- Web applications usually follow the layered style.

### The End

Thank You

### Resources

- M. Fowler: Patterns of Enterprise Application Architecture,
- E. Gamma, R. Johnson, R. Helm, J. Vlissides: Design Patterns: Elements of Reusable Object-Oriented Software,

- Lectures of Tomáš Černý – A7B36ASS
- <https://msdn.microsoft.com/en-us/library/ee658098.aspx>
- <https://www.petrikainulainen.net/software-development/design/understanding-spring-web-app>