		Overview of the Lecture				
	Introduction to C Programming	Part 1 – Course Organization				
		Course Organization				
	Jan Faigl	 Course Goals and Means of 	Achieving the Course Goals			
	Department of Computer Science Faculty of Electrical Engineering	Part 2 – Introduction to C Prog	gramming			
	Czech Technical University in Prague	Program in C				
	Lecture 01	 Values and Variables Standard Input/Output 				
	B0B36PRG – Programming in C					
			K. N. King: chapters 1, 2, and 3			
Jan Faigl, 2024	B0B36PRG - Lecture 01: Introduction to C Programming 1 / 62	Jan Faigl, 2024	B0B36PRG - Lecture 01: Introduction to C Programming 2	2 / 62		
Course Organization	Course Goals and Means of Achieving the Course Goals	Course Organization	Course Goals and Means of Achieving the Course	Goals		
ſ		B3B36PRG – Programming in C				
	Part I	 Submission of the homeworks – 	<pre>https://cw.fel.cvut.cz/wiki/courses/b3b36prg - BRUTE Upload System cvut.cz/brute and individually during the labs.</pre>			
	Part 1 – Course Organization	 Lecturer: prof. Ing. Jan Faigl, Ph.D. 	<pre>ience - http://cs.fel.cvut.cz (AIC) http://aic.fel.cvut.cz onomous Systems (CRAS) http://robotics.fel.cvut.cz</pre>			
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming 3 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming 5	5 / 62		


Course Organization	Course Goals and Means of Achieving the Course Goals	Course Organizat	ion		Course Goals and Means of	of Achieving the Course Goals
Course Organization		Course E	valuation			
	ng in C; Completion: Z,ZK; Credits: 6 Z - ungraded assessment, ZK - exam		Point Source	Maximum Points	Required Minimum Points	
Contact part (lecture anExam including preparat	 -30 hours per semester, six credits is about 180 hours per semester and labs): 3 hours per week, i.e., 42 hours in the total tion: 10 hours book reading and followed by homeworks) approx 9 hours per week Median load 		Assignment Bonus Assignment Labs (MCU)	25 10 6	All assignments must be turned in. - -	25
	<i>mandatory</i> , optional, and bonus parts – multi-thread computational applications.		Semester project Exam test Implementation exam	30 20 20		10 10 10 10
 Exam test and implement the teaching part of the s 	tation exam – verification of the acquired knowledge and skills from emester. An independent work with the computer in the lab (class room).		Total	111	55	
 Consultation - If you do the instructor/lecturer. 	ission of homeworks, and semestral project. not know, or spent too much time with the homework, consult with cact time during labs and lectures, ask questions, and discuss.		only for the implementation, and 55 points is solid E, not borderli evaluated, the scoring is upper b purse can be passed with	l vice versa, if you d ne, but solid. The e bound, i.e., it might ungraded ass	exam test (and implementation) is not correcte contain less points than evaluated.	ed but
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming 6 / 62	Jan Faigl, 2024		B0B36PRG	- Lecture 01: Introduction to C Programming	7 / 62
Course Organization	Course Goals and Means of Achieving the Course Goals	Course Organizat	ion		Course Goals and Means of	of Achieving the Course Goals
Resources and Literatu	re	Further E	Books			
Textbook	"C Programming: A Modern Approach" (King, 2008)		Programming in C, 4th Stephen G. Kochan, A ISBN 978-0321776419	Addison-Wesl	ey, 2014,	Programming in C
	A Modern Approach, 2nd Edition, K. N. King, Company, 2008, ISBN 860-1406428577 The main course textbook		21st Century C: C Tips O'Reilly Media, 2012, ISBN 978-1449327149		ew School, Ben Klemens,	
During the first week	s, take your time and read the book! The first homework deadline is in 18.3.2023.		0 0	0 0	d Edition (ANSI C) , <i>Brian W</i> . ntice Hall, 1988 (1st edition –	THE CONSTRUCTION
	the textbook, slides, comments, and your notes . <i>Demonstration source codes are provided as a part of the lecture materials!</i> gain practical skills by doing homeworks (yourself).		0	tephen A. Ra	X Environment, 3rd edition, ago Addison-Wesley, 2013,	Arkaneed Programming Herein UNIX Programming Herein Herein Herein Herein
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming 8 / 62	Jan Faigl, 2024		B0B36PRG	- Lecture 01: Introduction to C Programming	9 / 62

Course Organization	Course Goals and Means of	Achieving the Course Goals	Course Organization	Course Goals and Means of Achieving the Course Goals	
Further Resources			Course Goals		
			 Master (yourself) pro 	gramming skills. Labs, homeworks, exam	
		^m C++			
	ning Language, 4th Edition (C++11),	PROGRAMMING LANGUNGE		C programming language	
Bjarne Stroustrup, /	Addison-Wesley, 2013, ISBN 978-0321563842	BIARNE STROL STRUP	Acquire experience of	C programming to use it efficiently	
		Contraction of Contract of Con		Your own experience!	
	with many 2 and Editions Common Laionnan	Maria Laterri Construction	Gain experience to re	ad, write, and understand small C programs	
	rithms, 3rd Edition, <i>Cormen, Leiserson,</i> The MIT Press, 2009, ISBN 978-0262033848	webbor (Ther Ta	Acquire programming	; habits to write	
Rivest, and Stein,	ne IVITT Press, 2009, ISBN 978-0202033848	ALGORITHMS		understandable source codes	
		•	reusable programs	;	
📔 Algorithms, 4th Edit	ion , Robert Sedgewick, Kevin Wayne,	որիսիսովորություն	Experience programm	ning with	
Addison-Wesley, 201	1, ISBN 978-0321573513	Algorithms	 Workstation/desk 	top computers – using services of operating system	
			0.1	system calls, read/write files, input and outputs	
			 Multithreaded ap 		
			Embedded applica	ations — STM32F446 Nucleo	
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming	10 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming 12 / 62	
Course Organization	Course Goals and Means of a	Achieving the Course Goals	Course Organization	Course Goals and Means of Achieving the Course Goals	
Teaching Programming in	B3B36PRG		Overview of the Lect	ures	
	rience and develop your programming skills.		1. Course information, Introd		
 Programming vs. algorithmiz Programming is the "craft" of the second secon	zation; of how to implement an algorithm correctly.		0, i 0	control structures (loops), expressions K. N. King: chapters 4, 5, 6, and 20 memory storage classes, function call K. N. King: chapters 7, 8, 9, 10, 11, and 18	
	the program must be correct too! Expected input vs. what	the user can input.	 Data types, arrays, pointer Data types: arrays, strings, 		
 The learning load is therefore 	spread over the course of the semester.		5. Data types: Struct, Union,	Enum, Bit fields. Preprocessor and Large Programs	
Practice assignments and ho			6 Input/Output - reading/w	K. N. King: chapters 10, 14, 15, 16, and 20 itting from/to files and other communication channels, Standard C library – selected	
	ogramming skills throughout the semester is essen		functions K. N. King: chapters 21, 22, 23, 24, 26, and 27		
	ginning of the semester to understand the principles (reading the semester of the semestation of the semestation of the semestation of the semi-semi-semi-semi-semi-semi-semi-semi-	· /	7. Parallel and multi-thread programming – methods and synchronizations primitives		
 Without knowing the constru- Know and know how to use (cts and basic commands, you cannot program effect not "stick"). Dependence on whispe			odels, POSIX threads and C11 threads /rap up, examples such as linked lists	
	imple tasks to learn programming constructs and h		10. Accuracy and Speed of Ca		
source code.	Code clarity and the ability to navi	•		erences between C and $C++$ Introduction to $C++$.	
	ays be implemented based on the topics covered the		12. Quick introduction to C+- <i>Reserve</i> (<i>Rector's day</i>)	-	
	vanced constructs may be more elegant(shorter), but may not provide t		13. Resource Ownership in C+	+	
	over the necessary knowledge, which is further dee the lectures and give more space for practical learning.	pened.		upporting materials for the lectures are available at	
You can choose a practical was	ay of absorbing programming knowledge from exan	ples, which is		s://cw.fel.cvut.cz/wiki/courses/b3b36prg/start	
	etical preparation from textbook(s).		Kead slides, textbook	, or even watch the recorded lectures before the lecture contact time!	
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming	12 / 62		B0B36PRG – Lecture 01: Introduction to C Programming 14 / 62	
		13 / 62	Jan Faigl, 2024	DUDSOPRG - Lecture 01: Introduction to C Programming 14 / 02	

Course Organization	Course Goals and Means of Achieving th	e Course Goals	Course Organization	Course Goals and Means of Achieving th	e Course Goals
Homeworks			Semestral Project		
 1+7 homeworks - seven for 	the workstation. https://cw.fel.cvut.cz/wiki/courses/b3b36prg/hw	/start	 A combination of control and con communication, and user interact 	mputational applications with multithreading, tion	
1. HW 00 – Testing (1 point)		1 h	,	fel.cvut.cz/wiki/courses/b3b36prg/semestral-project/	start
2. HW 01 – ASCII Art (2 points)		3 h	 Mandatory task can be awarded 		bull
	Coding style penalization – up to -100% from the ga	-	•		
3. HW 02 – Prime Factorization (2 4. HW 03 – Caesar Cipher (2 point		4 h (bonus) 3 h (bonus)	Bonus part can be awarded for a		
	. ,	()		Up to 30 points in the total for the semestral p	project.
5. HW 04 – Text Search (2 points	+ 3 points optional) oints + 3 points optional + 4 points bonus) Coding style! 6 h +	5 h	Minimum required points: 10!		
7. HW 06 – Circular Buffer (2 poin		5 h (bonus) 5 h	Deedlin	e – best before 17.05.2024.	
	,	-	Deadin	E – Dest Defore 17.05.2024. Further updates and additional points might be points	sciblel
8. HW 07 – Linked List Queue with		7 h	D		SSIDIE:
All homeworks must be s	ubmitted to award an ungraded assessment <i>Total about 4</i> Late submission		D	eadline – 19.05.2024.	
	alization is to motivate you thinking about it and learn the craft of cod you improve over the semester, penalization can be compensated at th		• Expected required time to finish	the semestral project is about 30–50 hours.	
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming	15 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming	16 / 62
Course Organization	Course Goals and Means of Achieving th	e Course Goals	Course Organization	Course Goals and Means of Achieving th	e Course Goals
Expected and Reported 7	Fimes Needed to Complete Homeworks		Homework Assignment – BRU	JTE	
B3B36PRG - Average sum of the	۵ ۵		BRUTE – Bundle for Reservatio	n, Uploading, Testing and Evaluation	
reported median times.	□ 2017 ■ 2018		Formal check – compiling the		
96 hours (with HW05B	2019		 Functionality and correctness t 	esting – checking output for a given input	
\sim 6 h, SEM \sim 30 h).	♀ - ■ 2020 ■ 2021		 Public inputs and correspon Test the program yourself before 	nding outputs / non-public inputs.	
• 6 credits is about 150–180 hours	2022		 Test the program yoursen being Using the available inputs a 		
that is	8	· · · · · · · · · · · · · · · · · · ·	 Creating your own inputs a 	•	
 42 h contact part 10 h exam, and 		· · · · · · · · · · · · · · · · · · ·	Creating inputs with the in		
 about 100–128 hours for 			Verifying the output with t	he attached test or reference program.	
homeworks. Plan your work! Use the first	- 3		Understanding the code and check	cking possible states.	
weeks to read the textbook!				e able to answer why it is there and what it doe retrieval from the user, parse the possible input value	
	ę		or function return values!	etrieval from the user, parse the possible input value	25
		••••••••••••••••••••••••••••••••••••••		e is critical in terms of functionality, check the input and , g., output a message and exit the program.	/or
		N.		expected input is a number and the user enters something else	
		Y I			
Jan Faigl, 2024	into into into into into into into into	17 / 60	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming	18 / 62

Course Organization	Course Goals and Means o	f Achieving the Course Goals	Program in C	Values and Variables	Standard Input/Output		
Tasks and BRUTE							
Tasks are not just about subminimitation	tting an implementation that passes the BRUTI	E tests.					
 BRUTE is a tool to conti The goal is to learn to in Tasks are all about gaining gra 	tasks in BRUTE, it to verify the program func nuously check progress and gain knowledge. dependently program functional programs cor dual experience with specific constructs. We been implemented many times, and even generative A	rectly.		Part II			
 In this course you have the opportunity to understand C programming through your own implementation of assignments. The task successful submission is a means to reach thegoal, not the goal itself. Tasks are very similar in relative difficulty. It is important to solve the tasks independently and 			Part 2 – Introduction to C Programming				
to learn the sub-skills. Rather than struggling too long Tasks HW01–HW03 and HW05 Focused on consistency, re In terms of training and learning	Absolutely, the tasks get progressively more as by your own, ask (on Discord), for practice or are checked for correctness and clarity of code eadability, and modularity (splitting into function for the split even a seemingly trivial program into mulpend too much time implementing without sign.	and more difficult! consultation . ons). <i>tiple functions</i> .					
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming	19 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming	20 / 62		
Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output		
C Programming Language			Writing Your C	Program			
 Low-level programming langu 	lage		U	f the C program is written in text files.			
 System programming language 	-			es usually with the suffix .h .			
-)	Language for (embedded) systems — MCU,	cross-compilation.	 Sources files usually named with the suffix .c. Header and source files together with declaration and definition (of functions) support. 				
 A user (programmer) can do Initia 	almost everything.	ated memory, etc.					
 Very close to the hardware resources of the computer. Direct calls of OS services, direct access to registers and ports. 			 Organization of sources into several files (modules) and libraries. Modularity – Header file declares a visible interface to others. 				
Dealing with memory is cruci	ial for correct behaviour of the program.			A description (list) of functions and their arguments without particular im	plementation.		
One of the goals of the PRG course is to acquire fundamental principles that can be further generalized for other programming languages. The C programming language provides great opportunity to became familiar with the memory model and key elements for writting efficient programs.		 Reusability Only the "interface" declared in the header files is needed to use functions from available binary libraries. 					
It is highly recommen	ded to have compilation of your progra	m		s of keywords, language constructs such as expressions and			
	fully under control.		programmer's i				
It may look difficult at the beginning, but it is relatively easy and straightforward. Therefore, we highly recommend to use fundamental tools for your program compilation. After you acquire basic skills, you can profit from them also in more complex development environments.			 variables – named mamory space; function names – named sequences of instructions). 				
can profit from them also in n	nore complex development environments.		= function	names – nameu sequences or instructions).			

Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output	
			Writing Identifi	iers in C		
			 Identifiers are 	e names of variables (custom types and functions).		
Escape	sequences for writting special symbols				functions, viz further lectures.	
•	\oo, where o is an octal numeral		Rules for the	identifiers		
	, \xhh, where h is a hexadecimal numeral		Character	rs a–z, A–Z, 0–9 a .		
	1 int $i = 'a';$		The first	character is not a numeral.		
	2 int h = 0x61; 3 int o = 0141;		Case sens			
	4 5 printf("i: %i h: %i o: %i c: %c\n", i, h, o, i);		Length of	f the identifier is not limited.		
	<pre>6 printf("oct: \141 hex: \x61\n");</pre>			First 31 characters are significant – depends on t	he implementation / compiler.	
	E.g., \141, \xt	<i>61</i> lec01/esqdho.c	Keywords ₃₂			
 \0 - character reserved for the end of the text string (null character) 			auto break case char const continue default do double else enum			
				loat for goto if int long register return short sig ruct switch typedef union unsigned void volat	tile while	
			Static St	ruct switch typeder union unsigned void voia	c98	
				g., inline, restrict, _Bool, _Complex, _Imaginary. s, e.g., _Alignas, _Alignof, _Atomic, _Generic, _State	atic_assert,	
Jan Faigl, 2024	B0B36PRG - Lecture 01: Introduction to C Programm	ing 24 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C	Programming 25 / 62	
Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output	
Simple C F	Program		Program Comp	pilation and Execution		
			 Source file pr 	rogram.c is compiled into runnable form by the co	ompiler, e.g., clang or	
1	<pre>#include <stdio.h></stdio.h></pre>		gcc.			
2	int main (maid)			clang program.c		
	int main(void)		There is a new file a.out that can be executed, e.g.,			
4	<pre>printf("I like B3B36PRG!\n");</pre>			./a.out		
5	princi (i fike boboorka: (i),			Alternatively the program can be run only by a.out in the ca is set in the search path of executable files	se the actual working directory	
7	return 0;		The program	prints the argument of the function printf().		
8	}	lec01/program.c	./a.out			
- 6			I like B3B3	36PRG!		
suffix .o				run the program just by a.out instead of ./a.out you nery to the search paths defined by the environment variable		
	Object code contains relative addresses and function calls or just i without known implementations.	reierences to TUNCTION		export PATH="\$PATH: 'pwd'"		
The final	al executable program is created from the object files by the lin	nker.		Notice, this is not recommended, because of potentia	ally many working directories.	
			The command p	pwd prints the actual working directory, see man pwd.		
Jan Faigl, 2024	B0B36PRG - Lecture 01: Introduction to C Programm	ing 26 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C	Programming 27 / 62	

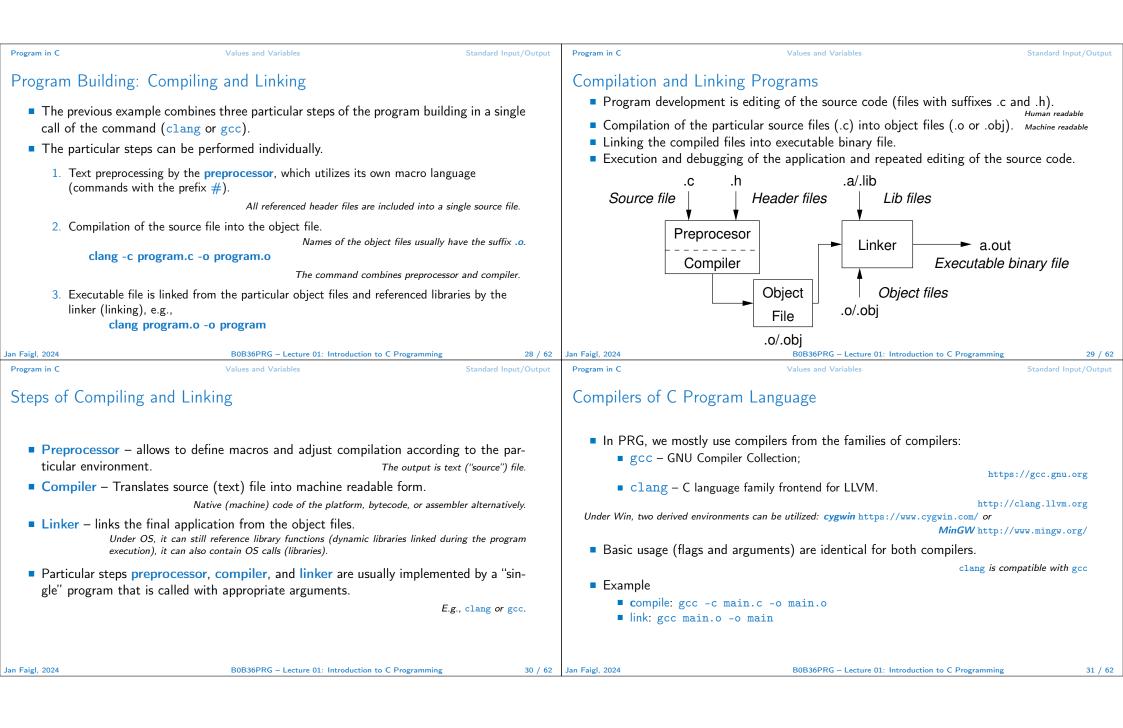

Structure of the Source Code - Commented Example Commented source file program.c. /* Comment is inside the markers (two characters) and it can be split to multiple lines */ // In C99 - you can use single line comment #include <stdio.h> /* The #include direct causes to include header file stdio.h from the C standard library */ f int main(void) // simplified declaration f (// of the main function f (// the main function f (// of the main function. Return value 0 to the operating system */ f () return 0; /* termination of the function. Return value 0 to the operating system */ f () function for the function to C Programming f () function for the function to C Programming f () function for the function to C Programming f () function for the function to C Programming f () function for the function to C Programming f () function for the function for the function to C Programming f () function function f () function for</stdio.h>	rd Input/Output			
 Commented source file program.c. /* Comment is inside the markers (two characters) and it can be split to multiple lines */ and it can be split to multiple lines */ // In C99 - you can use single line comment #include <stdio.h> /* The #include direct causes to include header file stdio.h from the C standard library */ // of the main function // of the main function printf("I like B3B36PRG!\n"); /* calling printf() function from the stdio.h library to print string to the standard output. \n denotes a new line */ return 0; /* termination of the function. Return value 0 to the oparating system */ // o } BB36PRG - Lecture 01: Introduction to C Programming Standard Imput/Output Functions in C Values and Variables Standard Imput/Output Program in C</stdio.h>	ge.			
 /* Comment is inside the markers (two characters) and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be split to multiple lines */ and it can be standard library */ bint main(void) // simplified declaration r { // of the main function printf("I like B3B36PRG!In"); /* calling printf() function from the stdio.h library to print string to the standard output. \n denotes a new line */ return 0; /* termination of the function. Return value 0 to the operating system */ io } Jam Faigl. 2024 BB33PRG - Leture 01: Introduction to C Programming Standard Imput/Output Program in C Values and Variables Standard Imput/Output Progra	ge.			
Jan Faigl, 2024 B0B36PRG - Lecture 01: Introduction to C Programming 32 / 62 Jan Faigl, 2024 B0B36PRG - Lecture 01: Introduction to C Programming Program in C Values and Variables Standard Input/Output Program in C Values and Variables Standard Input/Output Functions in C Forgram in C Program in C Program in C Program in C Values and Variables Standard Input/Output	 Function is the fundamental building block of the modular programming language. <i>Modular program is composed of several modules/source files.</i> Function definition consists of the Function header; Function body. Definition is the function implementation. Function prototype (declaration) is the function header to provide information how the function can be called. It allows to use the function prior its definition, i.e., it allows to compile the code without the function implementation, which may be located in other place of the source code, or in other module. Declaration is the function header and it has the form 			
Program in C Values and Variables Standard Input/Output Program in C Values and Variables Standard Input/Output Functions in C Forgram Example / Module Program Example / Module	33 / 62			
	rd Input/Output			
<pre># Function names can be exported to other modules. Module is an independent file (compiled independently). # Function are implicitly declared as extern, i.e., visible. # Using the static specifier, the visibility of the function can be limited to the particular module. # Using the static specifier, the visibility of the function can be limited to the particular module. # Local module function. # Function arguments are local variables initialized by the values passed to the function. # C allows recursions – local variables are automatically allocated at the stack. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments of the function are not mandatory – void arguments. # Arguments are passed by value (call by value</pre>				
The return type of the function can be void, i.e., a function without return value – void fnc(void); Jan Faigl, 2024 B0B36PRG - Lecture 01: Introduction to C Programming 34 / 62 Jan Faigl, 2024 B0B36PRG - Lecture 01: Introduction to C Programming				

Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output		
Program Starting Po	pint - main()		Arguments of the main() Function				
function must be theThe main() function1. Full variant for presented on the second secon	n is the starting point of the program with rograms running under an Operating System (" argc, char *argv[])	two basic forms.	 Arguments of the main() Punction During the program execution, the OS passes to the program the number of arguments (argc) and the arguments (argv). In the case we are using OS. The first argument is the name of the program. int main(int argc, char *argv[]) { int v; v = 10; v = v + 1; return argc; ? The program is terminated by the return in the main() function. The returned value is passed back to the OS and it can be further use, e.g., to control the program execution. 				
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C	Programming 36 / 62	1 8	B0B36PRG - Lecture 01: Introduction to C Pro	gramming 37 / 62		
Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output		
Example of Compilat	tion and Program Execution		Example – Prog	ram Execution under Shell			
 Building the program by the clang compiler – it automatically joins the compilation and linking of the program to the file a.out. clang var.c The output file can be specified, e.g., program file var. 			 The return value of the program is stored in the variable \$?. sh, bash, zsh Example of the program execution with different number of arguments. 				
	clang var.c -o var can be executed as follows. ./var		./var ./var; echo 1	\$?			
 The compilation and execution can be joined to a single command. clang var.c -o var; ./var The execution can be conditioned to successful compilation. clang var.c -o var && ./var 			./var 1 2 3; echo \$? 4 ./var a; echo \$?				
	Logical operator && depends on the command in		2				
Jan Faigl, 2024	B0B36PRG - Lecture 01: Introduction to C	Programming 38 / 62	Jan Faigl, 2024	B0B36PRG - Lecture 01: Introduction to C Pro	gramming 39 / 62		

Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output	
Writting Values of the	e Numeric Data Types – Literals		Integer Literals			
 Values of the data typ 			J. J	e stored as one of the integer type (keywords)	: int, long, short,	
C has 6 type of constant	ants (literals)			Further	integer data types are possible.	
Integer			Integer values (lit	erals)		
 Rational 	We cannot simply	write irrational numbers.	Decimal	123 450932		
Characters	we cannot simply	write mational numbers.	Hexadecimal	0x12 0xFAFF	(starts with $0x$ or $0X$)	
 Text strings 			Octal	0123 0567	(starts with 0)	
Enumerated		Enum	unsigned	12345U	(suffix U or u)	
			<pre>long unsigned lo</pre>	12345L ng 12345ul	(suffix L or 1) (suffix UL or u1)	
Symbolic – #defin	ne NUMBER 10		Insighed folong long	12345UI	(suffix LL or 11)	
Preprocessor			 Without suffix, the literal is of the type typu int. 			
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Progra	mming 41 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C	Programming 42 / 62	
Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output	
Literals of Rational N	umbers		Character Literals			
Rational numbers can	be written					
with floating point						
	nd exponent – 31.4e-3 or 31.4E-3.		Format – single (or multiple) character in apostrophe.		
		Scientific notation		'A', 'B' or '\n'		
 Floating point numeric types depends on the implementation, but they usually follow IEEE-754-1985. 			• Value of the single character literal is the code of the character. $^{\prime}0^{\prime} \sim 48, \ ^{\prime}A^{\prime} \sim 65$			
Data types of the ratio	onal literals:	·		Value of character out of ASCII (greater than	127) depends on the compiler.	
	It, if not explicitly specified to be another type;		 Type of the character constant (literal). Character constant is the int type. 			
	±,	float $f = 10.f$:		instant is the int type.		
long double - su	ffix L or 1.	,				
	lo	ng double ld = 10.11;				
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Progra	mming 43 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C	Programming 44 / 62	
		3 1/	<u> </u>			

Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output		
String Literals			Constants of the	Enumerated Type			
 Format – a sequer in quotation (citation) 	nce of character and control characters (escap tion) marks.	e sequences) enclosed		ues of the enumerated type starts from 0 and each t one, values can be explicitly prescribed.	other item increase		
Ŭ	constant with the end of line characters separated by white spaces are joined to single		enum S	enum {PADES,SPADES = 10,			
"String literal" "with the end of the line character\n"					value is 11 */		
is concatenate	e into			EARTS, HEARTS = 15, IAMONDS DIAMONDS = 13			
■ Type	String literal with end of the line cha	racter\n"	};	};			
 String literal is '\0'. 	s stored in the array of the type char terminated	by the null character	The enumeration values are usually written in uppercase. Type – enumerated constant is the int type.				
E.g., String literal "word" is stored as $\frac{2}{2} \sqrt{2} \sqrt{2} \sqrt{2} \sqrt{2} \sqrt{2} \sqrt{2} 2$			Value of the enumerated literal can be used in loops. enum { SPADES = 0, CLUBS, HEARTS, DIAMONDS, NUM_COLORS };				
	The size of the array must be abo More about text strings in the	e e		= SPADES; i < NUM_COLORS; ++i) {			
an Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C		Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Pro	gramming 46 / 62		
Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output		
Symbolic Constant	t-#define		Variable with a d	constant value			
It is macro co	stant is established by the preprocessor comm mmand without argument. e must be on a new line. #define SCORE 1	and #define.	modifier (keywor	rd) (const)			
		Usually written in uppercase.	 Using the keyword const, a variable can be marked as constant. <i>Compiler checks assignment and do not allow to set a new value to the variable.</i> A constant value can be defined as follows.				
 Symbolic constant 	ts can express constant expressions. #define MAX_1 ((10*6) - 3)						
 Symbolic constant 	ts can be nested. #define MAX_2 (MAX_1 + 1)						
 Preprocessor per value. 	rforms the text replacement of the define	constant by its	Constant values	#define PI 3.14159265 s have type, and thus it supports type checking.			
	<pre>#define MAX_2 (MAX_1 + 1)</pre>						
	ly recommended to use brackets to ensure correct evaluatio constant 5*MAX_1 with the outer brackets is 5*((10*6) - 3						
an Faigl, 2024	B0B36PRG - Lecture 01: Introduction to C	Programming 47 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Pro	gramming 48 / 62		

			1		
Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output
<pre>6 7 sum = 100 + 43; /* se 8 printf("The sum of 10 9 /* %i formatting comm 10 return 0; 11 } ■ The variable sum of the ty the memory.</pre>	on of local variable of the int type et value of the expression to sum */ 00 and 43 is %i\n", sum); mand to print integer number */ pe int represents an integer number. Its valu ame of the memory location, where the integ		<pre>Example of Sum of Two Variables #include <stdio.h> int main(void) { int var1; int var2 = 10; /* inicialization of the variable */ int sum; var1 = 13; var1 = 13; sum = var1 + var2; printf("The sum of %i and %i is %i\n", var1, var2, sum) return 0; } Variables var1, var2 and sum represent three different locations is cated automatically), where three integer values are stored.</stdio.h></pre>		memory (allo-
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programmin Values and Variables	g 49 / 62 Standard Input/Output	Jan Faigl, 2024 Program in C	B0B36PRG – Lecture 01: Introduction to C Programming Values and Variables	50 / 62 Standard Input/Output
Variable Definition			Assignment, Variables, unsigned char	and Memory – Visualization	
 The variable definition has a general form declaration-specifiers variable-identifier; Declaration specifiers are following. Storage classes: at most one of the auto, static, extern, register; Type quantifiers: const, volatile, restrict; None or more type quantifiers are allowed. Type specifiers: void, char, short, int, long, float, double, signed, unsigned. In addition, struct and union type specifiers can be used. Finally, own types defined by typedef can be used as well. 			<pre>1 unsigned char var1; 2 unsigned char var2; 3 unsigned char sum; 4 5 var1 = 13; 6 var2 = 10; 7 8 sum = var1 + var2;</pre>		t defined after ences" to the
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programmin	g 51 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming	52 / 62

Program in C Values and Variables Standard Input/Output Formatted Output - printf() • Numeric values can be printed to the standard output using printf(). • Numeric values can be printed to the standard output using printf(). • Numeric values can be printed to the standard output using printf(). • Numeric values can be printed to the standard output using printf(). • Numeric values can be printed to the standard output using printf(). • Numeric values can be printed to the standard output using printf(). • Numeric values can be printed to the standard output using printf(). • Numeric values can be printed to the standard output using printf(). • Numeric values can be read (from stdin) by the scanf() function. • Numeric values can be read (from stdin) by the scanf() function. • Numeric values can be read (from stdin) by the scanf() function. • Numeric values can be read (from stdin) by the scanf() function. • Numeric values can be read (from stdin) by the scanf() function. • Numeric values can be read (from stdin) by the scanf() function. • Numeric values can be read (from stdin) by the scanf() function. • Numeric values can be read (from stdin) by the scanf() call is the number of successfully parsed values. • Example of readings integer value and value of the double type. • * **********************************								
 Wrately in transformed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Wrate values can be printed to the standard output using printf(). Specification of the number of digits is poslub, as well as an alignment to left (right), etc. Specification of the number of digits is poslub, as well as an alignment to left (right), etc. Specification of the number of digits is poslub, as well as an alignment to left (right), etc. Specification of the number of digits is poslub, as well as an alignment to left (right), etc. Specification of the number of digits is poslub, as well as an alignment to left (right), etc. Specification of the number of digits is poslub, as well as an alignment to left (right), etc. Specification of the number of digits is poslub, as well as an alignment to left (right), etc. Specification of the number of digits is poslub, as well as an alignment to left (right), etc. Specification of the number of digits is poslub, as well as an alignment to left (right), etc. 	Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output		
 a lint var2; int var2; int var2; int sum; <	Assignment, Variables, an	nd Memory – Visualization	int	Standard Input and Output				
Intelle-andian order. 1 an Faid. 2014	<pre>2 int var2; 3 int sum; 4 5 // 00 00 00 13 6 var1 = 13; 7 8 // x00 x00 x01 xF4 9 var2 = 500; 10 11 sum = var1 + var2;</pre>	Size can be find of Memory content is not defined the variable to the memory var1 13 0 0 0 0xf4 0x1 0x2 0x0 0x0 0xC sum	the operator sizeof (int). ined after the definition of y_{red}	text-oriented) st The stdin and Basic function for For parsing num The function pr	andard input (stdin) and output (stdout). Programs for MCU stdout streams can be utilized for communi or text-based input is getchar() and for the Both are defined in t eric values the scanf() function can be util intf() provides formatted output, e.g., a no	<pre>without OS does not have them. cation with a user. e output putchar(). he standard C library <stdio.h>. ized. umber of decimal places.</stdio.h></pre>		
Program in C Values and Variables Standard Input/Output Formatted Output - printf() • Numeric values can be printed to the standard output using printf(). • Numeric values can be printed to the standard output using printf(). • The first argument is the format string that defines how the values are printed. • The conversion specification starts with the character '%'. • Text string not starting with % is printed as it is. • Basic format strings to print values of particular types are as follows. • Char %c • Bool %i, %u • Int %i, %x, %o • float %f, %e, %g, %a • Specification of the number of digits is possible, as well as an alignment to left (right), etc. • Specification of the number of digits is possible, as well as an alignment to left (right), etc. • Further options in homeworks and lab exercises. • Further ret, // indicate failure or success			nulti-byte types) are stored in the					
 Formatted Output - printf() Numeric values can be printed to the standard output using printf(). man printf or man 3 printf The first argument is the format string that defines how the values are printed. The conversion specification starts with the character '%'. Text string not starting with % is printed as it is. Basic format strings to print values of particular types are as follows. char %c _Bool %i, %u int %i, %x, %o float %f, %e, %g, %a double %f, %e, %g, %a double %f, %e, %g, %a Specification of the number of digits is possible, as well as an alignment to left (right), etc. Further options in homeworks and lab exercises. 	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction t	o C Programming 53 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to	C Programming 55 / 62		
 Numeric values can be printed to the standard output using printf(). man printf or man 3 printf The first argument is the format string that defines how the values are printed. The conversion specification starts with the character '%'. Text string not starting with % is printed as it is. Basic format strings to print values of particular types are as follows. <pre></pre>	Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	Standard Input/Output		
Jan Faigl, 2024B0B36PRG - Lecture 01: Introduction to C Programming56 / 62Jan Faigl, 2024B0B36PRG - Lecture 01: Introduction to C Programming57 / 62	 Numeric values can be print The first argument is the first conversion specification Text string not starting with Basic format strings to print Specification of the number 	nted to the standard output using format string that defines how the on starts with the character '%'. th % is printed as it is. nt values of particular types are as char %c _Bool %i, %u int %i, %x, %o float %f, %e, %g, %a double %f, %e, %g, %a er of digits is possible, as well as a	<pre>man printf or man 3 printf values are printed. s follows. n alignment to left (right),</pre>	Numeric values ca The argument of A memory address The return value of Example of readin 1 #include <stdio.< p=""> 2 #include <stdiit< p=""> 4 int main(void) 5 { 6 int ret = EXI 7 int i; 8 double d; 10 printf("Enter 11 int r = scanf 12 if (r == 1) 13 printf("Enter 14 if (r == 1 & &</stdiit<></stdio.<>	<pre>an be read (from stdin) by the scanf() function the function is a format string. s of the variable has to be provided to set its va of the scanf() call is the number of successfully gs integer value and value of the double type. .h> // printf and scanf o.h> // EXIT_FAILURE and EXIT_SUCCESS TT_FAILURE; f("%i", &i); // operator & returns the address of i atter a double value: "); & scanf("%lf", &d) == 1) { // !!! Return value !!! ou entered %02i and %0.1f\n", i, d); f_SUCCESS; // zero - exit success</pre>	Syntax is similar to printf(). ue from the stdin. y parsed values.		
	Jan Faigl, 2024	B0B36PRG - Lecture 01: Introduction t	o C Programming 56 / 62		B0B36PRG - Lecture 01: Introduction to	-		

			1			
Program in C	Values and Variables	Standard Input/Output	Program in C	Values and Variables	S	itandard Input/Output
Example: Program w	ith Output to the stdout $1/2$	Example: Program with Output to the stdout 2/2				
<pre>Instead of printf() we can use fprintf() with explicit output stream stdout, or alternatively stderr; both functions from the <stdio.h>. #include <stdio.h> int main(int argc, char **argv) { int r = fprintf(stdout, "My first program in C!\n"); fprintf(stdout, "printf() returns %d that is a number of printed characters\n", r); r = fprintf(stdout, "l23\n"); fprintf(stdout, "l23\n"); fprintf(stdout, "printf()"123\n\n") returns %d because of end-of-line '\\n'\n", r); fprintf(stdout, "Run with %d arguments\n", argc); if (argc > 1) { fprintf(stdout, "The arguments are:\n"); for (int i = 1; i < argc; ++i) { fprintf(stdout, "Arg: %d is \"%s\"\n", i, argv[i]); fi = return 0; } </stdio.h></stdio.h></pre>			 Notice, using the header file <stdio.h>, several other files are included as well to define types and functions for input and output. Check by, e.g., clang -E print_args.c</stdio.h> ./print_args first second My first program in C! printf() returns 23 that is a number of printed characters 123 printf("123\n") returns 4 because of end-of-line '\n' Its name is "./print_args" Run with 3 arguments The arguments are: Arg: 1 is "first" Arg: 2 is "second" 			
17 } Jan Faigl, 2024	B0B36PRG - Lecture 01: Introduction to 0	lec01/pring_args.c	Jan Faigl, 2024	B0B36PRG – Lecture 01	: Introduction to C Programming	59 / 62
 Extended declaration variables. int main(int argc The environmen <stdlib.h>.</stdlib.h> For Mac OS X, there 	<pre>char **argv, char **envp) { t variables can be accessed using the function getenv</pre>	Unix and MS Windows like OS. }	Topics Discussed	Summary of the	Lecture	
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C	C Programming 60 / 62	Jan Faigl, 2024	B0B36PRG – Lecture 01	: Introduction to C Programming	61 / 62

Topics Discussed		Programs		
Topics Discussed				
 Information about the Course Introduction to C Programming Program, source codes and compilation of the program Structure of the souce code and writting program Variables and basic types Variables, assignment, and memory Basic Expressions Standard input and output of the program Formating input and output Next: Expressions and Bitwise Operations, Selection Statements and Loops 		Part IV Appendix		
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming 62 / 6		amming 63 / 62	
Programs		Programs		
Example of step debuggin	B C (mynap, search resultations C (mynap, search c (d) D < d ± 7 (d) D D C (mynap, search c (d) D D D C (mynap, search c (d) D < d ± 7 (d) D D D C (mynap, search c (d) D D D 0 Bool dijstrat, solv(could wightstra, int label) D D D D D D D 0 for (dij) label < dij) + num, nodes) (for (dij) label < dij) + num, nodes) (for (dij) label < dij) + num, nodes) (for (dij) label < dij) + num, nodes) (for (dij) + nu	 STA – Store the acc. to address ADD – Add to the acc. INP – Input to the acc. OUT – Output of the acc. BRP – Set PC on zero or possitive acc. 	computing.org.uk/lmc/ om/watch?v=6cbJWV4AGmk	
Jan Faigl, 2024	B0B36PRG – Lecture 01: Introduction to C Programming 64 / 6	2 Jan Faigl, 2024 B0B36PRG – Lecture 01: Introduction to C Progra	amming 66 / 62	

Programs	Programs			
Example – Processing the Source Code by Preprocessor	Example – Compilation of the Source Code to Assembler			
Using the -E flag, we can perform only the preprocessor step.	Using the -S flag, the source code can be compiled to Assembler.			
= cosing the - mag, we can perform only the preprocessor step:gcc - E var.c	clang -S var.c -o var.s			
Alternatively clang -E var.c	1 .file "var.c" 19 movq %rsi, -16(%rbp) 2 .text 20 movl \$10 -20(%rbp)			
<pre>1 # 1 "var.c" 2 # 1 "<built-in>" 3 # 1 "<command-line>" 4 # 1 "var.c" 5 int main(int argc, char **argv) { 6 int v; 7 v = 10; 8 v = v + 1; 9 return argc; 10 } lec01/var.c</command-line></built-in></pre>	2 .text 20 movl \$10, -20(%rbp) 3 .globl main 21 movl -20(%rbp), %edi 4 .align 16, 0x90 21 movl -20(%rbp), %edi 5 .type main,@function 22 addl \$1, %edi 6 main: 24 movl -8(%rbp), %eax 7 .cfi_startproc 25 popq %rbp 8 # BB#0: 26 ret 9 pushq %rbp 26 ret 10 .Ltmp2: 28 .size main, .Ltmp5-main 11 .cfi_def_cfa_offset 16 29 .cfi_endproc 12 .Ltmp3: 31 13 .cfi_offset %rbp, -16 32 .ident "FreeBSD clang version 3.4.1 (14 movq %rsp, %rbp 32 .ident "FreeBSD clang version 3.4.1 (14 movq %rsp, %rbp 33 .section ".note.GNU-stack","", 15 .Ltmp4: .section ".note.GNU-stack","", @progbits 18 movl %edi, -8(%rbp) 33 .section ".note.GNU-stack","",			
Jan Faigl, 2024 B0B36PRG – Lecture 01: Introduction to C Programming 67 / 62	Jan Faigl, 2024 B0B36PRG – Lecture 01: Introduction to C Programming 68 / 62			
Programs	Programs			
Example – Compilation to Object File	Example – Executable File under OS 1/2			
The souce file is compiled to the object file.	By default, executable files are "tied" to the C library and OS services.			
clang -c var.c -o var.o	The dependencies can be shown by ldd var.			
% clang -c var.c -o var.o	ldd var Idd – list dynamic object dependencies			
% file var.o var.o: ELF 64-bit LSB relocatable, x86-64, version 1 (FreeBSD), not	var:			
stripped	libc.so.7 => $/lib/libc.so.7$ (0x2c41d000)			
Linking the object file(s) provides the executable file. clang var.o -o var % clang var.o -o var % file var var: ELF 64-bit LSB executable, x86-64, version 1 (FreeBSD), dynamically linked (uses shared libs), for FreeBSD 10.1 (1001504) , not stripped dynamically linked	 The so-called static linking can be enabled by the -static. clang -static var.o -o var % ldd var % file var var: ELF 64-bit LSB executable, x86-64, version 1 (FreeBSD), statically linked, for FreeBSD 10.1 (1001504), not stripped % ldd var ldd: var: not a dynamic ELF executable 			
aynamically linked not stripped	Check the size of the created binary files!			
Jan Faigl, 2024 B0B36PRG – Lecture 01: Introduction to C Programming 69 / 62	Jan Faigl, 2024B0B36PRG - Lecture 01: Introduction to C Programming70 / 62			

```
Programs
Example – Executable File under OS 2/2
    • The compiled program (object file) contains symbolic names (by default).
                                                                           E.g., usable for debugging.
      clang var.c -o var
       wc -c var
           7240 var
                                                              wc - word, line, character, and byte count
                                                                                    -c – byte count
    • Symbols can be removed by the tool (program) strip.
      strip var
       wc -c var
           4888 var
                      Alternatively, you can show size of the file by the command ls -1.
                                          B0B36PRG - Lecture 01: Introduction to C Programming
                                                                                                71 / 62
Jan Faigl, 2024
```