Parallel Programming

Jan Faigl

Department of Computer Science Faculty of Electrical Engineering Czech Technical University in Prague

Lecture 07

B3B36PRG – Programming in C



Overview of the Lecture

Part 1 – Introduction to Parallel Programming

Introduction

Parallel Processing

Semaphores

Shared Memory

Messages



Part I

Part 1 – Introduction to Parallel Programming



Jan Faigl, 2025

B3B36PRG – Lecture 07: Parallel Programming

Semaphores

Messages

Outline

Introduction

Parallel Processing

Semaphores

Shared Memory

Messages



Jan Faigl, 2025

B3B36PRG – Lecture 07: Parallel Programming

Semaphores

Parallel Programming

- The idea of parallel programming comes from the 60s with the first multi-program and pseudo-parallel systems.
- Parallelism can be hardware or software-based.
 - Hardware-based true hardware parallelism of multiprocessor systems.
 - Software based pseudo-parallelism.
- Pseudo-parallelism A program with parallel constructions may run in the pseudoparallel environment on single or multiprocessor systems.

Motivation Why to Deal with Parallel Programming


- Increase computational power.
 - Having a multiprocessor system, we can solve the computational problem faster.
- Efficient usage of the computational power.
 - Even a running program may wait for data.
 - E.g., a usual program with user interaction typically waits for the user input.
- Simultaneous processing of many requests.
 - Handling requests from individual clients in client/server architecture.



Process – Executed Program

- Process is an executed program running in a dedicated memory space.
- Process is an entity of the Operating System (OS) that is scheduled for independent execution.
- Process is usually in one of three basic states:
 - Executing currently running on the processor (CPU);
 - Blocked waiting for the periphery;
 - Waiting waiting for the processor.
- A process is identified in the OS by its identifier, e.g., Process IDentificator PID.
- Scheduler of the OS manages running processes to be allocated to the available processors.



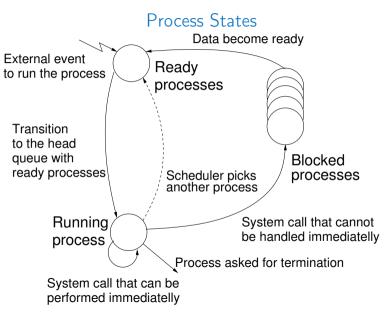



Multi-processor Systems

- Multiprocessor systems allow true parallelism.
- It is necessary to synchronize processors and support data communication.
 - Resources for activity synchronization.
 - Resources for communication between processors (processes).



Possible Architectures for Parallel Executions

- Control of individual instructions.
 - SIMD Single-Instruction, Multiple-Data same instructions are simultaneously performed on different data.
 - "Processors" are identical and run synchronously.
 - E.g., "Vectorization" such as MMX, SSE, 3Dnow!, and AVX, AVX2, etc.
 - MIMD Multiple-Instruction, Multiple-Data processors run independently and asynchronously.
- Memory Control Access.
 - Systems with shared memory central shared memory.


E.g., multi-core CPUs.

Systems with distributed memory – each processor has its own memory.

E.g., computational grids.




SIMD – Single-Instruction, Multiple-Data

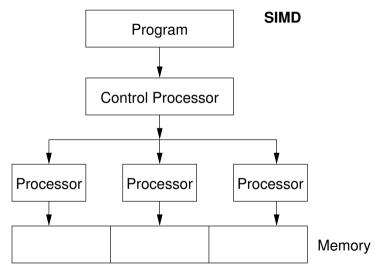




MIMD – Multiple-Instruction, Multiple-Data

MIMD

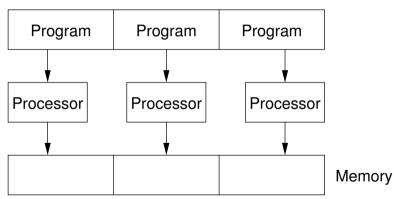



Systems with Shared Memory

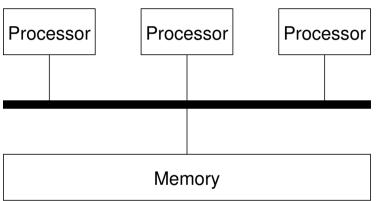


- Processors communicate using shared memory space.
- Processors may also synchronize their activities, i.e., granting exclusive access to the memory.



Jan Faigl, 2025

Systems with Distributive Memory



- There is not a problem with exclusive access to the memory.
- It is necessary to address communication between the processors.

Jan Faigl, 2025



The Role of the Operating System (OS)

- OS provides hardware abstraction layer encapsulates HW and separates the user from the particular hardware architecture (true/pseudo parallelism).
- OS is responsible for the synchronization of running processes.
- OS provides user interfaces (system calls).
 - To create and destroy processes.
 - To manage processes and processors.
 - To schedule processors on available processors.
 - To control access to shared memory.
 - Mechanisms for inter-process communication (IPC).
 - Mechanisms for processes synchronization.



Parallel Processing

Semaphores

Shared Memory

Messages

Outline

Introduction

Parallel Processing

Semaphores

Shared Memory

Messages



Jan Faigl, 2025

B3B36PRG – Lecture 07: Parallel Programming

Parallel Processing and Programming Languages

- Regarding parallel processing, programming languages can be divided into languages w/o and without explicit support for parallelism.
 - Without explicit support for parallelism possible mechanisms of parallel processing.
 - 1. Parallel processing is realized by the compiler and operating system.
 - 2. Parallel constructions are explicitly marked for the compiler.
 - 3. Parallel processing is performed by OS system calls.
 - With explicit support for parallelism.



Example of Parallel Processing Realized by Compiler 1/2

Example – Array Multiplication

```
#include "my_malloc.h"
 1
    #define SIZE 3000000
 3
    int main(int argc, char *argv[])
 5
    ſ
6
 7
       int i;
       int *in1 = (int*)mvMalloc(SIZE * sizeof(int));
8
       int *in2 = (int*)myMalloc(SIZE * sizeof(int));
9
10
       int *out = (int*)mvMalloc(SIZE * sizeof(int));
       for (i = 0: i < SIZE: ++i) {</pre>
11
          in1[i] = i;
12
          in2[i] = 2 * i:
13
       3
14
       for (i = 0: i < SIZE: ++i) {</pre>
15
          out[i] = in1[i] * in2[i];
16
          out[i] = out[i] - (in1[i] + in2[i]);
17
18
       3
       return 0;
19
20
   }
```



Example of Parallel Processing Realized by Compiler 2/2

Example 1

Example 2

1	icc compute.c	1	icc -msse compute.c; time ./a.out	
2	time ./a.out	2	<pre>compute.c(8) : (col. 2) remark: LOOP WAS VECTORIA</pre>	ZED.
4	real Om0.562s	4	real Om0.542s	
5	user Om0.180s	5	user Om0.136s	
6	sys Om0.384s	6	sys Om0.408s	

Example 3

- 1 icc -parallel compute.c; time ./a.out
 2 compute.c(12) : (col. 2) remark: LOOP WAS AUTO-PARALLELIZED.
- 4 real 0m0.702s
- 5 user 0m0.484s
- 6 sys Om0.396s



20 / 49

Example – OpenMP – Matrix Multiplication 1/2

- Open Multi-Processing (OpenMP) application programming interface for multi-platform shared memory multiprocessing. http://www.openmp.org
- We can instruct the compiler by macros for parallel constructions, such as parallelization over the outside loop for the *i* variable.

```
void multiply(int n, int a[n][n], int b[n][n], int c[n][n])
    1
       ł
    2
           int i:
    3
       #pragma omp parallel private(i)
    4
       #pragma omp for schedule (dynamic, 1)
    5
          for (i = 0; i < n; ++i) {</pre>
    6
              for (int j = 0; j < n; ++j) {</pre>
    7
                  c[i][j] = 0;
    8
                 for (int k = 0; k < n; ++k) {
    9
                     c[i][j] += a[i][k] * b[k][j];
   10
                  }
   11
              }
   12
                                                                                    lec07/demo-omp-matrix.c
   13
           ł
                                                 Squared matrices of the same dimensions are used for simplicity.
       3
   14
Jan Faigl, 2025
                                                     B3B36PRG - Lecture 07: Parallel Programming
```

Example – OpenMP – Matrix Multiplication 2/2

Comparison of matrix multiplication with 1000× 1000 matrices using OpenMP on iCore5 (2 cores with HT).

1	gcc -std=c99 -02 -o demo-omp demo-omp-matrix	W ::			TOP (talirinde)				
2	./demo-omp 1000	last pid: 3219; 99 processes: 5	; load	averages:					08:24:22
	1	CPU: 99.8% user.							
3	Size of matrices 1000 x 1000 naive	Mem: 86M Active.			5M Wired, 41	.88K Ca		6M Buf, 5515M	Free
4	multiplication with $O(n^3)$	Swap:							
5	c1 == c2: 1	PID USERNAME 3219 jf			RES STAT 16532K CPU2		TIME 0:12	WCPU COMMA 74.76% demo-	
6	Multiplication single core 9.33 sec	3219 jf							omp{demo-
		3219 jf	93		16532K CPU3				
7	Multiplication multi-core 4.73 sec	3219 jf 777 root			16532K RUN 1964K sele			74.66% demo- 0.00% power	
		3113 jf			6356K paus		0:03	0.00% zsh	u
9	export OMP_NUM_THREADS=2	819 root						0.00% Xorg	
10	./demo-omp 1000	3070 jf			23836K sele			0.00% gkrel	
	-	774 root	20		18100K sele			0.00% ntpd{	
11	Size of matrices 1000 x 1000 naive	774 root 3078 jf			18100K kqre 62472K sele		0:01 0:01	0.00% ntpd{ 0.00% owncl	
12	multiplication with $O(n^3)$	3154 jf	žŏ		5992K paus		0:01	0.00% zsh	000.00000101
12	multiplication with 0(h 3)	3160 j̃f							
13	c1 == c2: 1	_487 _pflogd	20		2332K bpf			0.00% pflog	;d
	Multiplication single come 0.48 cos	3096 jf 864 root		0 30028K 0 148M	5956K ttyi 8988K sele		0:01 0:01	0.00% zsh 0.00% http:	
14	Multiplication single core 9.48 sec	3153 jf		0 86504K			0:01	0.00% nttp: 0.00% sshd	
15	Multiplication multi-core 6.23 sec			0.0000 III		x	0.102	ereen oond	_

Use, e.g., top program for a list of running processes/threads.



lec07/demo-omp-matrix.c

Languages with Explicit Support for Parallelism

- It has support for the creation of new processes.
 - Running process creates a copy of itself.
 - Both processes execute the identical code (copied).
 - The parent process and child process are distinguished by the process identifier (PID).
 - The code segment is explicitly linked with the new process.
- Regardless of how a new process is created, the most important is the relation to the parent process execution and memory access.
 - Does the parent process stop its execution till the end of the child process?
 - Is the memory shared by the child and parent processes?
- Granularity of the processes parallelism ranging from the level of the instructions to the parallelism of programs.



Parallelism – Statement Level

Example – parbegin-parend block

parbegin

- $S_1;$ $S_2;$ \dots S_n parend
- Statement S_1 are S_n executed in parallel.
- Execution of the main program is interrupted until all statements S_1 to S_n are terminated.
- Statement S_1 are S_n executed in parallel.

```
Example – doparallel
```

```
1 for i = 1 to n doparalel {
2   for j = 1 to n do {
3        c[i,j] = 0;
4        for k = 1 to n do {
5            c[i,j] = c[i,j] + a[i,k]*b[k,j];
6 } };
```

Parallel execution of the outer loop over all *i*.



E.g., OpenMP in C

Jan Faigl, 2025

B3B36PRG – Lecture 07: Parallel Programming

Parallelism – Procedure Level

• A procedure is coupled with the execution process.

```
procedure P;

PID x_{pid} = newprocess(P);
```

```
killprocess(x<sub>pid</sub>);
```

- P is a procedure and x_{pid} is a process identifier.
- Assignment of the procedure/function to the process at the declaration

PID x_{pid} process(P).

- The process is created at the creation of the variable x.
- The process is terminated at the end of x or sooner.





Parallelism – Program (Process) Level

- A new process can be only a whole program.
- A new program is created by a system call, which creates a complete copy of itself, including all variables and data at the moment of the call.

Example - Creating a copy of the process by fork system call

```
1 if (fork() == 0) {
2   /* code executed by the child process */
3 } else {
4   /* code executed by the parent process */
5 }
```

E.g., fork() in C



Semaphores

Example - fork()

```
#define NUMPROCS 4
     for (int i = 0; i < NUMPROCS; ++i) {</pre>
        pid t pid = fork():
  з
        if (pid == 0) {
  4
           compute(i, n);
  5
           exit(0);
  6
        } else {
  7
           printf("Child %d created\n", pid);
  8
  9
 10
     printf("All processes created\n");
 11
     for (int i = 0; i < NUMPROCS; ++i) {</pre>
        pid_t pid = wait(&r);
 13
        printf("Wait for pid %d return: %d\n", pid, r);
 14
 15
     3
     void compute(int mvid, int n)
 16
 17
     ł
        printf("Process myid %d start computing\n", myid);
 18
 19
         . . .
        printf("Process mvid %d finished\n", mvid);
 20
 21
    }
                                            lec07/demo-fork.c
                                                      B3B36PRG - Lecture 07: Parallel Programming
Jan Faigl, 2025
```

9111				OP				ㅋㅋㅋ
Men: 718M Active, 1253M Inact, 1033M Wired, 21M Cache, 1630M Buf, 126 Free								
ARC: 64H Total, 61H MFU, 2480K MRU, 16K Anon, 179K Header, 429K Other								

clang demo-fork.c && ./a.out Child 2049 created Process myid 0 start computing Child 2050 created Process myid 1 start computing Process myid 2 start computing Child 2051 created Child 2052 created Process myid 3 start computing All processes created Process mvid 1 finished Process myid 0 finished Wait for pid 2050 return: 0 Process myid 3 finished Process mvid 2 finished Wait for pid 2049 return: 0 Wait for pid 2051 return: 0 Wait for pid 2052 return: 0



Semaphores

Messages

Outline

Introduction

Parallel Processing

Semaphores

Shared Memory

Messages



Jan Faigl, 2025

B3B36PRG – Lecture 07: Parallel Programming

Semaphore

- E. W. Dijkstra Semaphore is a mechanism to synchronize parallel processes with shared memory.
- Semaphore is an integer variable with the following operations.
 - InitSem initialization.
 - Wait $\begin{cases} If S > 0 \text{ then } S \leftarrow S - 1 \text{ (resources are available, in this case, acquire one).} \\ Otherwise suspend execution of the calling process (wait for S become S > 0). \end{cases}$
 - Signal $\begin{cases} If there is a waiting process, awake it$ *(let the process acquire one resource).* $Otherwise increase value of S by one, i.e., <math>S \leftarrow S + 1$ *(release one resource).*
- Semaphores can be used to control access to shared resources.
 - S < 0 shared resource is in use. The process asks for access to the resources and waits for its release.
 - S > 0 shared resource is available. The process releases the resource.

The value of the Semaphore can represent the number of available resources. Then, we can acquire (or wait for) k resources – wait(k): $S \leftarrow S - k$ for S > k, and also releases k resources – signal(k): $S \leftarrow S + k$.



Semaphores Implementation

Operations with a semaphore must be atomic.

The processor cannot be interrupted during the execution of the operation.

- Machine instruction *TestAndSet* reads and stores the content of the addressed memory space and sets the memory to a non-zero value.
- During execution of the *TestAndSet* instructions, the processor holds the system bus, and access to the memory is not allowed for any other processor.



Usage of Semaphores

- Semaphores can be utilized for defining a critical sections.
- Critical sections are a part of the program where exclusive access to the shared memory (resources) must be guaranteed.

Example of critical section protected by a semaphore

```
InitSem(S,1);
Wait(S);
/* Code of the critical section */
Signal(S);
```

Synchronization of the processes using semaphores.

Example of synchronization of processes.

```
/* process p */
```

```
InitSem(S,0)
Wait(S); ...
exit();
```

```
/* process q */
...
Signal(S);
exit();
```



Example – Semaphore 1/4 (System Calls)

• Semaphore is an entity of the Operating System (OS).

- 1 #include <sys/types.h>
- 2 #include <sys/ipc.h>
- 3 #include <sys/sem.h>
- 5 /* create or get existing set of semphores */
- 6 int semget(key_t key, int nsems, int flag);
- 8 /* atomic array of operations on a set of semphores */
- 9 int semop(int semid, struct sembuf *array, size_t nops);
- 11 /* control operations on a st of semaphores */
- 12 int semctl(int semid, int semnum, int cmd, ...);



Example – Semaphore 2/4 (Synchronization Protocol)

- Example when the main (primary) process waits for two other processes (secondary) to become ready.
 - 1. *Primary* process suspend the execution and waits for two other *secondary* processes become ready.
 - 2. Secondary processes then wait to be released by the primary process.
- Proposed synchronization "protocol".
 - Define our way to synchronize the processes using the system semaphores.
 - Secondary process increments semaphore by 1.
 - The secondary process waits for the Semaphore to become 0, and then it is terminated.
 - Primary process waits for two secondary processes and decrements the semaphore about 2.
 - It must also ensure the semaphore value is not 0; otherwise, secondary processes will be terminated prematurely.
 - We need to use the atomic operations with the Semaphore.

```
lec07/sem-primary.c lec07/sem-secondary.c
```

The design of the communication/synchronization protocol is the most important task of the developer.



B3B36PRG – Lecture 07: Parallel Programming

```
Example – Semaphore 3/4 (Primary Process)
      int main(int argc, char* argv[])
   1
      {
   2
         struct sembuf sem[2]; // structure for semaphore atomic operations
   з
         int id = semget(1000, 1, IPC_CREAT | 0666); // create semaphore
   4
         if (id != -1) {
   5
            int r = semctl(id, 0, SETVAL, 0) == 0;
   6
            sem[0].sem_num = 0; // operation to acquire semaphore
   8
            sem[0].sem_op = -2; // once its value will be >= 2
   9
            sem[0].sem_flg = 0; // representing two secondary processes are ready
  10
            sem[1].sem_num = 0; // the next operation in the atomic set
  12
            sem[1].sem_op = 2; // of operations increases the value of
  13
            sem[1].sem_flg = 0; // the semaphore about 2
  14
            printf("Wait for semvalue >= 2\n"):
  16
            r = semop(id, sem, 2); // perform all (two) operations (in sem array) atomically
  17
            printf("Press ENTER to set semaphore to 0\n");
  18
            getchar();
  19
            r = semctl(id, 0, SETVAL, 0) == 0; // set the value of semaphore
  20
            r = semctl(id. 0. IPC_RMID. 0) == 0; // remove the semaphore
  21
         3
  22
         return 0:
  23
                                                                                lec07/sem-primarv.c
  24
     7
Jan Faigl, 2025
                                                B3B36PRG - Lecture 07: Parallel Programming
```

Example – Semaphore 4/4 (Secondary Process)

```
1 int main(int argc, char* argv[])
```

```
ł
2
       struct sembuf sem:
3
       int id = semget(1000, 1, 0);
4
       int r:
5
       if (id != -1) {
6
7
          sem.sem_num = 0; // add the secondary process
          sem.sem_op = 1; // to the "pool" of resources
8
          sem.sem_flg = 0;
9
          printf("Increase semafore value (add resource)\n");
10
          r = semop(id, \&sem, 1);
11
          sem.sem op = 0:
12
          printf("Semaphore value is %d\n", semctl(id, 0, GETVAL, 0));
13
          printf("Wait for semaphore value 0\n"):
14
15
          r = semop(id, \&sem, 1);
          printf("Done\n");
16
       ŀ
17
18
       return 0:
                                                                               lec07/sem-secondarv.c
   }
19
                                                 clang sem-primary.c -o sem-primary
  The IPC entities can be listed by ipcs.
                                                 clang sem-secondary.c -o sem-secondary
```

B3B36PRG – Lecture 07: Parallel Programming



Issues with Semaphores

- The main issues are arising from a wrong usage.
- Typical mistakes are as follows.
 - Wrongly identified a critical section.
 - Process may block by multiple calls of Wait(S).
 - E.g., the deadlock issues may arise from situations like.

Example – Deadlock

/* process 1*/	/* process 2*/
Wait(S1);	Wait(S2);
Wait(S2);	Wait(S1);
Signal(S2);	Signal(S1);
Signal(S1);	Signal(S2);



Semaphores

Messages

Outline

Introduction

Parallel Processing

Semaphores

Shared Memory

Messages



Jan Faigl, 2025

B3B36PRG – Lecture 07: Parallel Programming

Shared Memory

- Labeled part of the memory accessible from different processes.
- OS service provided by system calls.

Example of System Calls

- 1 /* obtain a shared memory identifier */
 2 int shmget(key_t key, size_t size, int flag);
 4 /* attach shared memory */
 5 void* shmat(int shmid, const void *addr, int flag);
 7 /* detach shared memory */
 8 int shmdt(const void *addr);
- 10 /* shared memory control */
- int shmctl(int shmid, int cmd, struct shmid_ds *buf);
 - OS manages information about the usage of shared memory.
 - OS also manages permissions and access rights.



Example – Shared Memory 1/4 (Write)

- Write a line read from stdin to the shared memory.
- 1 #include <sys/types.h>
- 2 #include <sys/ipc.h>
- 3 #include <sys/shm.h>
- 4 #include <stdio.h>
- 6 #define SIZE 512

```
8 int main(int argc, char *argv[])
```

```
9 {
```

```
10 char *buf;
```

```
11 int id;
```

```
12 if ((id = shmget(1000, SIZE, IPC_CREAT | 0666)) != -1) {
13 if ( (buf = (char*)shmat(id, 0, 0)) ) {
14 fgets(buf, SIZE, stdin);
```

```
15 shmdt(buf);
```

16 } 17 } 18 return 0;

```
19 }
```



See man fgets!

lec07/shm_write_c

Example – Shared Memory 2/4 (Read)

- Read a line from the shared memory and put it to the stdout.
 - 1 #include <sys/types.h>
 - 2 #include <sys/shm.h>
 - 3 #include <stdio.h>
 - 5 #define SIZE 512

```
7 int main(int argc, char *argv[])
```

```
8 {
```

13

14

16

17

```
9 int id;
```

```
10 char *buf;
```

```
11 if ((id = shmget(1000, 512, 0)) != -1) {
12 if ((buf = (char*)shmat(id, 0, 0)) ) {
```

```
printf("mem:%s\n", buf);
```

```
}
```

```
15 shmdt(buf);
```

} else {

```
fprintf(stderr, "Cannot access to shared memory!\n");
}
```

```
18 }
19 return 0;
```



Example – Shared Memory 3/4 (Demo)

- 1. Use shm-write to write a text string to the shared memory.
- 2. Use shm-read to read data (string) from the shared memory.
- 3. Remove shared memory segment.

ipcrm -M 1000

4. Try to read data from the shared memory.

- 1 % clang -o shm-write shm-write.c
- 2 % ./shm-write
- 3 Hello! I like programming in C!

```
% clang -o shm-read shm-read.c
   % ./shm-read
2
   mem:Hello! I like programming in C!
 3
   % ./shm-read
5
   mem:Hello! I like programming in C!
6
    % ipcrm -M 1000
8
   % ./shm-read
a
   Cannot access to shared memory!
10
         lec07/shm-write.c lec07/shm-read.c
```



Semaphores

Messages

Example – Shared Memory 4/4 (Status)

• A list of accesses to the shared memory using ipcs command.

1	after	creating shared a	nemory segment and	before	writing	g the	text		
2	m	65539	1000rw-rw-rw-	jf	jf	jf	jf	1	512
		1239	1239 22:18:48 no-e	ntry 22	:18:48				
4	after	writing the text	to the shared memo	ory					
5	m	65539	1000rw-rw-rw-	jf	jf	jf	jf	0	512
		1239	1239 22:18:48 22:1	9:37 22	:18:48				
7	after	reading the text							
8	m	65539	1000rw-rw-rw-	jf	jf	jf	jf	0	512
		1239	1260 22:20:07 22:2	0:07 22	:18:48				



Jan Faigl, 2025

Semaphores

Messages

Outline

Introduction

Parallel Processing

Semaphores

Shared Memory

Messages



Jan Faigl, 2025

B3B36PRG – Lecture 07: Parallel Programming

Sensing Messages and Queues of Messages

- Processes can communicate via messages sent/received to/from system messages queues.
- Queues are entities of the OS with defined system calls.
- 1 #include <sys/types.h>
- 2 #include <sys/ipc.h>
- 3 #include <sys/msg.h>

```
5 /* Create a new message queue */
```

- 6 int msgget(key_t key, int msgflg);
- 8 /* Send a message to the queue -- block/non-block (IPC_NOWAIT) */

```
9 int msgsnd(int msqid, const void *msgp, size_t msgsz, int msgflg);
```

10

- 11 /* Receive message from the queue -- block/non-block (IPC_NOWAIT) */
- 12 int msgrcv(int msqid, void *msgp, size_t msgsz, long msgtyp, int msgflg);
- 13
- 15 int msgctl(int msqid, int cmd, struct msqid_ds *buf);

Another message-passing system can be implemented by a user library, e.g., using network communication.



Example – Messages Passing 1/4 (Synchronization, Primary)

- Two processes are synchronized using messages.
 - 1. The primary process waits for the message from the secondary process
 - 2. The primary process informs the secondary to solve the task.
 - 3. The secondary process informs the primary about the solution.
 - 4. The primary process sends a message about termination.

```
struct msgbuf {
 1
       long mtype;
 2
       char mtext[SIZE];
 3
   };
 4
    int main(int argc, char *argv[])
 6
    ł
 7
8
       struct msgbuf msg;
       int id = msgget(KEY, IPC_CREAT | 0666);
9
10
       int r:
       if (id != -1) {
11
```



Example – Messages Passing 2/4 (Primary)

```
msg.mtype = 3; //type must be > 0
  12
            printf("Wait for other process \n");
  13
            r = msgrcv(id, \&msg, SIZE, 3, 0);
  14
            printf("Press ENTER to send work\n");
  15
            getchar():
  16
            strcpy(msg.mtext, "Do work");
  17
            msg.mtype = 4; //work msg is type 4
  18
  19
            r = msgsnd(id, &msg, sizeof(msg.mtext), 0);
            fprintf(stderr, "msgsnd r: %d\n",r);
  20
            printf("Wait for receive work results\n",r);
  21
            msg.mtvpe = 5;
  22
            r = msgrcv(id, &msg, sizeof(msg.mtext), 5, 0);
  23
            printf("Received message: %s\n", msg.mtext);
  24
            printf("Press ENTER to send exit msg\n");
  25
            getchar();
  26
            msg.mtype = EXIT_MSG; //I choose type 10 as exit msg
  27
            r = msgsnd(id, \&msg, 0, 0);
  28
         3
  29
                                                                               lec07/msg-primarv.c
         return 0:
  30
  31
Jan Faigl, 2025
                                               B3B36PRG - Lecture 07: Parallel Programming
```

Messages

```
Example – Messages Passing 3/4 (Secondary)
   int main(int argc, char *argv[])
1
   ſ
2
3
       . . .
      msg.mtvpe = 3:
4
      printf("Inform main process\n");
5
      strcpy(msg.mtext, "I'm here, ready to work");
6
      r = msgsnd(id, &msg, sizeof(msg.mtext), 0);
7
      printf("Wait for work\n");
8
      r = msgrcv(id, &msg, sizeof(msg.mtext), 4, 0);
9
      printf("Received message: %s\n", msg.mtext);
10
      for (i = 0; i < 4; i++) {
11
        sleep(1);
12
        printf(".");
13
        fflush(stdout):
14
15
      } //do something useful
      printf("Work done. send wait for exit\n"):
16
      strcpv(msg.mtext, "Work done, wait for exit");
17
      msg.mtvpe = 5;
18
      r = msgsnd(id, &msg, sizeof(msg.mtext), 0);
19
20
      msg.mtvpe = 10:
      printf("Wait for exit msg\n"):
21
      r = msgrcv(id, &msg, SIZE, EXIT_MSG, 0);
22
                                                                                lec07/msg-secondarv.c
      printf("Exit message has been received\n"):
23
```



Jan Faigl, 2025

B3B36PRG – Lecture 07: Parallel Programming

lec07/msg-secondary.c

Example – Messages Passing 4/4 (Demo)

- 1. Execute the primary process.
- 2. Execute the secondary process.
- 3. Perform the computation.
- 4. Remove the created message queue identified by the msgid.

ipcrm -Q 1000

<pre>1 % of dig mog primary to to primary 2 % ./primary 3 Wait for other process 4 Worker msg received, press ENTER to send work msg 6 msgsnd r: 0 7 Wait for receive work results 8 Received message: I am going to wait for exit msg 9 Press ENTER to send exit msg 11 % ipcrm -Q 1000 12 % ipcrm -Q 1000 13 ipcrm: msqs(1000): : No such file or directory 14 % 14 % 14 % 14 % 14 % 14 % 14 % 14 %</pre>	1	% clang msg-primary.c -o primary	1	% clang msg-secondary.c -o secondary
 3 Wait for other process 4 Worker msg received, press ENTER to send work msg 6 msgsnd r: 0 7 Wait for receive work results 8 Received message: I am going to wait for exit msg 9 Press ENTER to send exit msg 11 %ipcrm -Q 1000 12 %ipcrm -Q 1000 12 %ipcrm regs(1000): : No such file or directory 14 % 3 Inform main process 4 Wait for work 5 Received message: Do work 6done 7 Work done, send wait for exit 8 Wait for exit msg 9 Exit message has been received 10 %ipcs -q 11 Message Queues: 12 T ID KEY MODE OWNER GROUP 13 q 65536 1000 -rw-rw- jf jf 14 % 	1		1	
 4 Worker msg received, press ENTER to send work msg 6 msgsnd r: 0 7 Wait for receive work results 8 Received message: I am going to wait for exit msg 9 Press ENTER to send exit msg 11 %ipcrm -Q 1000 12 %ipcrm -Q 1000 13 ipcrm: msqs(1000): : No such file or directory 14 % 4 Wait for work 5 Received message: Do work 6done 7 Work done, send wait for exit 8 Wait for exit msg 9 Exit message has been received 10 %ipcs -q 11 Misesage Queues: 12 T ID KEY MODE OWNER GROUP 13 q 65536 1000 - rw-rw- jf jf 14 % 	2	% ./primary	2	% ./secondary
<pre>work msg work msg % % % % % % % % % % % % % % % % % % %</pre>	3	Wait for other process	3	Inform main process
<pre>6 msgsnd r: 0 6done 7 Wait for receive work results 7 Work done, send wait for exit 8 Received message: I am going to wait for exit msg 9 Press ENTER to send exit msg 9 Exit message has been received 10 %ipcs -q 11 %ipcrm -Q 1000 12 %ipcrm -Q 1000 12 T ID KEY MODE OWNER GROUP 13 ipcrm: msqs(1000): : No such file or 13 q 65536 1000 -rw-rw- jf jf 14 %</pre>	4	Worker msg received, press ENTER to send	4	Wait for work
 7 Wait for receive work results 8 Received message: I am going to wait for exit msg 9 Press ENTER to send exit msg 9 Kit message has been received 10 %ipcs -q 11 %ipcrm -Q 1000 12 %ipcrm -Q 1000 13 ipcrm: msqs(1000): : No such file or directory 14 % 		work msg	5	Received message:Do work
 8 Received message: I am going to wait for exit msg 9 Press ENTER to send exit msg 11 %ipcrm -Q 1000 12 %ipcrm -Q 1000 13 ipcrm: msqs(1000): : No such file or directory 14 % Wait for exit msg 9 Exit message has been received 10 %ipcs -Q 11 Message Queues: 12 T ID KEY MODE OWNER GROUP 13 q 65536 1000 -rw-rw- jf jf 14 % 	6	msgsnd r: 0	6	done
 exit msg 9 Press ENTER to send exit msg 11 %ipcrm -Q 1000 12 %ipcrm -Q 1000 13 ipcrm: msqs(1000): : No such file or directory 14 % 14 % 	7	Wait for receive work results	7	Work done, send wait for exit
9 Press ENTER to send exit msg 10 %ipcs -q 11 %ipcrm -Q 1000 11 Message Queues: 12 %ipcrm -Q 1000 12 T ID KEY MODE OWNER GROUP 13 ipcrm: msqs(1000): : No such file or directory 13 q 65536 1000 -rw-rw- jf jf 14 %	8	Received message: I am going to wait for	8	Wait for exit msg
9 Press ENTER to send exit msg 10 %ipcs -q 11 %ipcrm -Q 1000 11 Message Queues: 12 %ipcrm -Q 1000 12 T ID KEY MODE OWNER GROUP 13 ipcrm: msqs(1000): : No such file or directory 13 q 65536 1000 -rw-rw- jf jf 14 %		exit msg	9	Exit message has been received
11 %19crm -Q 1000 12 T ID KEY MODE 0WNER GROUP 12 %1pcrmQ 1000 13 q 65536 1000 -rw-rw- jf jf 13 q 65536 1000 -rw-rw- jf jf 14 %	9	8	10	%ipcs -q
12 %ipcrm -Q 1000 12 T ID KEY MODE OWNER GROUP 13 ipcrm: msqs(1000): : No such file or 13 q 65536 1000 -rw-rw- jf jf directory 14 %	11	Vincrm -0 1000	11	Message Queues:
13 ipcrm: msqs(1000): : No such file or directory 14 %			12	T ID KEY MODE OWNER GROUP
13 1pcrm: msqs(1000): : No such file or directory 14 %	12		13	a 65536 1000 = rw = rw = if if
alrectory 14 %	13	ipcrm: msqs(1000): : No such file or		1 5 5
		directory	14	7.
lec07/msg-primarv.c lec07/msg-s	14	%		
			1	ec07/msg-primary.c lec07/msg-se

#define KEY 1000

Jan Faigl, 2025

B3B36PRG - Lecture 07: Parallel Programming

Summary of the Lecture



Jan Faigl, 2025

B3B36PRG - Lecture 07: Parallel Programming

Topics Discussed

Topics Discussed

- Introduction to Parallel Programming
 - Ideas and main architectures
 - Program and process in OS
- Parallel processing
- Sychronization and Inter-Process Communication (IPC)
 - Semaphores
 - Messages
 - Shared memory

Design the synchronization/communication between the processes.

Next: Multithreading programming



Topics Discussed

Topics Discussed

- Introduction to Parallel Programming
 - Ideas and main architectures
 - Program and process in OS
- Parallel processing
- Sychronization and Inter-Process Communication (IPC)
 - Semaphores
 - Messages
 - Shared memory

Design the synchronization/communication between the processes.

Next: Multithreading programming



Parallel Computing using GPU (optional)

Part III Appendix



Jan Faigl, 2025

B3B36PRG - Lecture 07: Parallel Programming

Parallel Computing using GPU (optional)

Outline

Parallel Computing using GPU (optional)



Jan Faigl, 2025

B3B36PRG - Lecture 07: Parallel Programming

Massive parallelism using graphics cards

- Image rendering performed pixel-by-pixel can be easily parallelized.
- Graphics Processing Units (GPU) have a similar (or even higher) degree of integration with the main processors (CPU).
- They have a huge number of parallel processors.

E.g., GeForce GTX 1060 \sim 1280 cores.

- The computational power can also be used in another application.
 - Processing stream of data (SIMD instructions processors).
 - GPGPU General Purpose computation on GPU. http://www.gpgpu.org
 - OpenCL (Open Computing Language) GPGPU abstract interface.
 - CUDA Parallel programming interface for NVIDIA graphics cards.

http://www.nvidia.com/object/cuda_home.html



Computational Power (2008)

- What is the reported processor computational power?
- Graphics (stream) processors.

CSX700	96 GigaFLOPs	
Cell	102 GigaFLOPs	
GeForce 8800 GTX	518 GigaFLOPs	(including texture units)
Radeon HD 4670	480 GigaFLOPs	
GeForce RTX 4060	15110 GigaFLOPs	(2023)

Main processors :

Peak catalogue values.

- Phenom X4 9950 (@2.6 GHz)
 21 GigaFLOPs

 Core 2 Duo E8600 (@3.3 GHz)
 22 GigaFLOPs

 Cure 2 Quad QX9650 (@3.3 GHz)
 35 GigaFLOPs

 Cure 2 Quad QX9650 (@3.3 GHz)
 35 GigaFLOPs

 Core i7 970 (@3.2 GHz)
 42 GigaFLOPs

 Core i9-13900 (@2.00–5.60 GHz)
 846 GigaFLOPs
 - Test linpack 32-bit.

(float vs double)

E.g., computational power / power consumption.



Is the reported power really achievable?

- How about other indicators?
 - CSX700 has typical power consumption around 9W.

Jan Faigl, 2025

B3B36PRG - Lecture 07: Parallel Programming

CUDA

- NVIDIA Compute Unified Device Architecture.
- Extension of the C to access the parallel computational units of the GPU.
- Computation (kernel) is executed by the GPU.
- Kernel is performed in parallel using available computational units.
- Host Main processor (process).
- Device GPU.
- Data must be in the memory accessible by the GPU.

Host memory \rightarrow *Device* memory

• The result (of the computation) is stored in the GPU memory.

Host memory \leftarrow *Device* memory




CUDA – Computational Model


- Kernel (computation) is divided into blocks.
- Each block represents a parallel computation of the part of the result. *E.g., a part of the matrix multiplication.*
- Each block consists of computational threads.
- Parallel computations are synchronization within the block.
- Blocks are organized into the grid.
- Scalability is realized by dividing the computation into blocks.

Blocks may not necessarily be computed in parallel. Based on the available number of parallel units, particular blocks can be computed sequentially.



CUDA - Grid, Blocks, Threads, and Memory Access





- Access time to the memory.
- Collisions for simultaneous access of several threads.



B3B36PRG - Lecture 07: Parallel Programming

CUDA – Example – Matrix Multiplication 1/8

- NVIDIA CUDA SDK Version 2.0, matrixMul.
- Simple matrix multiplication.
 - $\boldsymbol{C} = \boldsymbol{A} \cdot \boldsymbol{B}$,
 - Matrices have identical dimensions $n \times n$,
 - where *n* is the multiple of the block size.
- Comparison
 - naive implementation in C (3× for loop),
 - naive implementation in C with matrix transpose.
 - CUDA implementation.
- Hardware
 - CPU Intel Core 2 Duo @ 3 GHz, 4 GB RAM,
 - GPU NVIDIA G84 (GeForce 8600 GT), 512 MB RAM.



Parallel Computing using GPU (optional)

CUDA – Example – Matrix Multiplication 2/8

Naive implementation

```
void simple_multiply(const int n,
1
          const float *A, const float *B, float *C)
 2
   ſ
 з
      for (int i = 0; i < n; ++i) {
 4
        for (int j = 0; j < n; ++j) {
5
          float prod = 0;
6
          for (int k = 0; k < n; ++k) {
7
            prod += A[i * n + k] * B[k * n + j];
8
          }
9
          C[i * n + j] = prod;
10
        }
11
      }
12
   3
13
```



Jan Faigl, 2025

CUDA – Example – Matrix Multiplication 3/8

```
Naive implementation with transpose
   void simple_multiply_trans(const int n, const float *a, const float *b, float *c)
1
2
   {
     float * bT = create_matrix(n);
3
     for (int i = 0; i < n; ++i) {
 Δ
       bT[i*n + i] = b[i*n + i]:
 5
       for (int i = i + 1; i < n; ++i) {
6
         bT[i*n + j] = b[j*n + i];
7
         bT[j*n + i] = b[i*n + i];
8
       }
9
10
     for (int i = 0; i < n; ++i) {
11
       for (int i = 0; i < n; ++i) {
12
         float tmp = 0;
13
         for (int k = 0: k < n: ++k) {
14
           tmp += a[i*n + k] * bT[j*n + k];
15
          }
16
         c[i*n + i] = tmp;
17
       3
18
19
     free(bT):
20
21
   }
```




Jan Faigl, 2025

CUDA – Example – Matrix Multiplication 4/8

CUDA – computation strategy

- Divide matrices into blocks.
- Each block computes a single sub-matrix C_{sub}.
- Each thread of the individual blocks computes a single element of C_{sub}.



CUDA – Example – Matrix Multiplication 5/8

```
CUDA – Implementation – main function
   void cuda_multiply(const int n, const float *hostA, const float *hostB, float *hostC)
1
   Ł
2
    const int size = n * n * sizeof(float);
3
    float *devA. *devB. *devC:
4
    cudaMalloc((void**)&devA, size);
6
    cudaMalloc((void**)&devB, size);
7
    cudaMalloc((void**)&devC. size):
8
    cudaMemcpy(devA, hostA, size, cudaMemcpyHostToDevice);
10
    cudaMemcpy(devB, hostB, size, cudaMemcpyHostToDevice);
11
    dim3 threads(BLOCK_SIZE, BLOCK_SIZE); // BLOCK_SIZE == 16
13
14
    dim3 grid(n / threads.x, n /threads.y);
16
    // Call kernel function matrixMul
    matrixMul<<<grid, threads>>>(n, devA, devB, devC);
17
    cudaMemcpy(hostC, devC, size, cudaMemcpyDeviceToHost);
19
    cudaFree(devA):
21
    cudaFree(devB):
22
    cudaFree(devC):
23
24
   }
```



CUDA – Example – Matrix Multiplication 6/8

```
CUDA implementation – kernel function
   global void matrixMul(int n. float* A. float* B. float* C) {
1
      int bx = blockIdx.x; int by = blockIdx.y;
2
      int tx = threadIdx.x; int ty = threadIdx.y;
3
      int aBegin = n * BLOCK SIZE * by: //beginning of sub-matrix in the block
4
      int aEnd = aBegin + n - 1; //end of sub-matrix in the block
5
      float Csub = 0:
6
      for (
7
           int a = aBegin, b = BLOCK_SIZE * bx;
8
           a <= aEnd:
0
           a += BLOCK SIZE, b += BLOCK SIZE * n
10
         ) {
11
         12
         __shared__ float Bs[BLOCK_SIZE] [BLOCK_SIZE]; // the block
13
         As[tv][tx] = A[a + n * tv + tx]; // each thread reads a single element
14
         Bs[ty][tx] = B[b + n * ty + tx]; // of the matrix to the memory
15
         syncthreads(): // synchronization. sub-matrix in the shared memory
16
         for (int k = 0: k \leq BLOCK SIZE: ++k) { // each thread computes
18
           Csub += As[tv][k] * Bs[k][tx]: // the element in the sub-matrix
19
         ŀ
20
         __syncthreads();
21
      3
22
      int c = n * BLOCK SIZE * bv + BLOCK SIZE * bx;
23
      C[c + n * tv + tx] = Csub; // write the results to memory
24
25 }
```



CUDA – Example – Matrix Multiplication 7/8

CUDA source codes.

Example - Dedicated source file cuda_func.cu

1. Declaration of the external function.

extern "C" { // declaration of the external function (cuda kernel)
 void cuda_multiply(const int n, const float *A, const float *B, float *C);
}

2. Compile the CUDA code to the C++ code.


1 nvcc --cuda cuda_func.cu -o cuda_func.cu.cc

3. Compilation of the cuda_func.cu.cc file using standard compiler.



CUDA – Example – Matrix Multiplication 8/8

Computational time (in milliseconds)

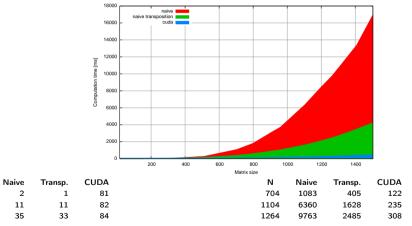

Matlab 7.6.0 (R2008a):

```
n=1104; A=rand(n,n); B=rand(n,n); tic; C=A*B; toc
Elapsed time is 0.224183 seconds.
```

```
Jan Faigl, 2025
```

Ν

112

208

304

